


Infinitely Expandable Video Wall Solution
WORLD'S NARROWEST 3D LED VIDEO WALL WV70MD




NARROWEST BEZEL

The narrowest bezel creates powerful and impactful video walls that can be easily installed, maintained and managed.

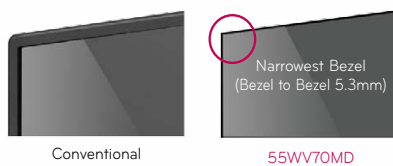


HIGH PICTURE QUALITY

Clear & vivid picture with deeper black - World's best dynamic CR (500,000 : 1 †)



Providing clear image virtually at any angle




AUTO CALIBRATION

Auto calibration software bundled will help you to get the perfect color and brightness uniformity.



24/7 OPERATION

The strength of PD Module is that it can operate 24 hours a day. It is highly durable and provides continuous performance.



LOW POWER CONSUMPTION

Annual costs saving of €507,730 @ 3X3 Video Wall.

| | Annual Saving | 3Yr Saving |
|-----------------|---------------|------------|
| 1 unit | 3 X 3 | 3 X 3 |
| Costs | 56,414 | 507,730 |
| Electricity(kW) | 438 | 3,942 |
| | 1,523,189 | 11,826 |

192 Competitors(55")

140 55WV70MD

*24hrs/day, €0.1288/kWh (Industry rate @ Germany)

WORLD'S NARROWEST 3D LED VIDEO WALL

WV70MD 55"



FEATURES

- 3D (FPR Type)
- Narrowest Bezel : 5.3mm (Bezel to Bezel)
- Slim Depth : 99mm
- 450nit (2D), 170nit (3D)
- Auto Calibration (SuperSign Elite-c)
- Wide Viewing Angle
- Smart Energy Saving (Low Power Consumption)

SPECIFICATIONS

55WV70MD

| PANEL | Screen Size | 55" (54.64" measured diagonal) |
|-----------------------|---------------------------|---|
| Panel Technology | IPS (LED BLU) | |
| Aspect Ratio | 16 : 9 | |
| Native Resolution | 1,920 x 1,080 (FHD) | |
| Brightness | 450nit (2D) / 170nit (3D) | |
| Contrast Ratio | 1,400 : 1 | |
| Dynamic CR | 500,000 : 1 | |
| Viewing Angle (H x V) | 178 x 178 | |
| Response Time | 8ms (G to G, *WOT) | |
| CONNECTIVITY | Input (Rear) | Digital: DVI-D(I), HDMI(I), Display Port(I) with HDCP for all input Analog: RGB(I), Shared Component(I), AV(I) Audio: PC Audio In(I) External Control: RS232C(I), RJ45(I), IR Receiver(I) USB: USB(I) Output (Rear) Digital: DVI-D(I) Analog: RGB(I) Audio: External Speaker(I) External Control: RS232C(I) Audio Auto Volume: No Balance: Yes Audio Power: 20W (10W x 2) Speaker On/off: Yes Clear Voice II: Yes Sound mode: Standard, Music, Cinema, Sports, Game |


| PHYSICAL SPECIFICATION | Bezel Width: 3.4mm (Top / Left) / 1.9mm (Bottom / Right) Monitor Dimension (W x H x D): 121.5cm x 68.6cm x 9.9cm Weight (head): 33.4kg Carton Dimensions (W x H x D): 140.0cm x 80.5cm x 33.0cm (Box outer size) Packed Weight: 42.4kg VESA™ Standard Mount Interface: 600mm x 400mm |
|----------------------------|---|
| SPECIAL FEATURES | Additional: Temp sensor, 15 x 15 Tile mode, 2 pairs of Handle, 2D to 3D Converter |
| ENVIRONMENT CONDITIONS | Operation Temperature: 0°C ~ 40°C Operation Humidity: 10% ~ 80% |
| POWER | Power Supply: 100-240V~, 50/60Hz Power Consumption: Typical / Smart Energy Saving: 240W(Typ) / 150W(SES) DPMS: 1.0W(RGB), 1.0W(HDMI) Power Off: 0.5W |
| STANDARD(CERTIFICATION) | Safety: UL / eUL / CB / TUV / KC EMC: FCC / CE / KCC ErP / Energy Star: Yes / Yes (Energy Star 5.1) |
| MEDIA PLAYER COMPATIBILITY | Slot PC compatible (optional): No External Media player Attachable: Yes |
| SOFTWARE COMPATIBILITY | Supersign Compatibility: Elite-w / Elite-w lite (Only Control) |
| ACCESSORY | Included: Remote Controller, Power Cable, RGB Cable, DVI Cable, Manual, IR Receiver, RS-232C Cable, Tiling Guide, Screw, Ring Core, 3D Glass |

* WOT : Within Operation Temperature
※ Image may differ slightly from actual product. Specifications are subject to change without prior notice.

INTERFACE



DIMENSION (unit : mm)

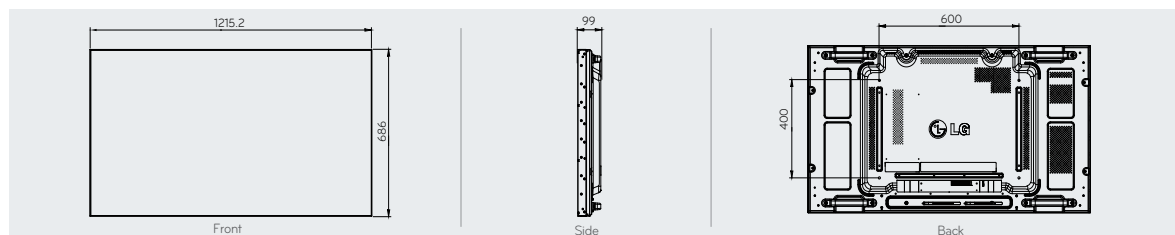

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660