




# EAC BOX PC

Embedded Automation Controller

**I330EAC-IKW**

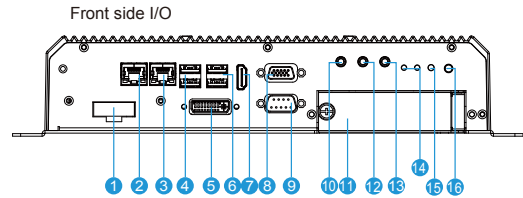

- |                |                       |
|----------------|-----------------------|
| 1. DC Input    | 9. RS232/422/485      |
| 2. Giga LAN    | 10. Mic in            |
| 3. Giga LAN    | 11. 2.5" SSD Slot x 2 |
| 4. USB 3.0 x 2 | 12. Line in           |
| 5. DVI         | 13. Line out          |
| 6. USB 3.0 x 2 | 14. LED indicator     |
| 7. HDMI        | 15. Reset             |
| 8. VGA         | 16. Power Button      |

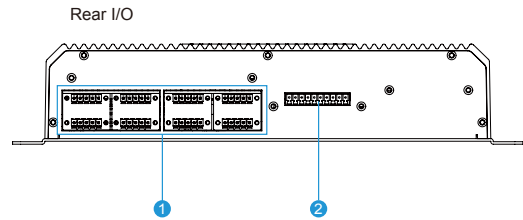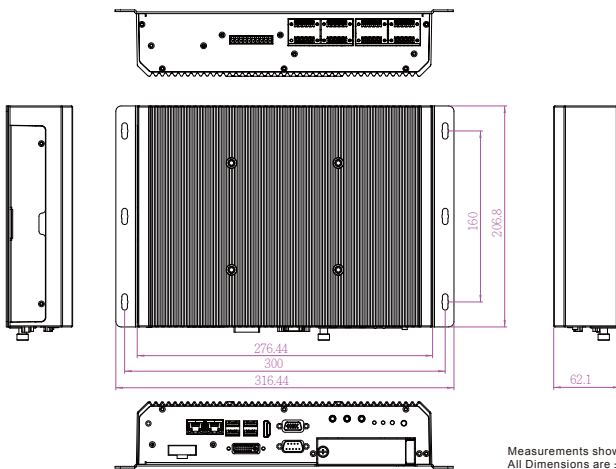

1. 8 x NMEA 0183 (Optional)
2. 8 x Isolated DIDO (Optional)

\* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

### System Specification

Processor	: Intel® Core i5-7200U Kaby Lake 2.5GHz (turbo to 3.1GHz)
BIOS	: Insyde BIOS
System Chipset	: Intel® SoC Integrated
System Memory	: DDR4-2133 SO-DIMM (Max 16GB)
Ethernet Controller	: 1000 Base-Tx Gigabit Ethernet Compatible
Storage	: 1 x mSATA SSD 64GB (default)
Second Storage (Optional)	: 2.5" Removable SSD/HDD

### I/O Connectors

Front Side I/O	: 1 x DC Input (Terminal Block 3pin)
	: 2 x LAN
	: 4 x USB3.0
	: 1 x HDMI Output
	: 1 x D-Sub15 (VGA) Output
	: 1 x DVI Output
	: 1 x RS232/422/485 port (Selectable by BIOS)
	: 1 x Audio in Jack
	: 1 x Audio out Jack
	: 1 x Power Button
	: 1 x Reset Button
Back Side I/O	: 8 x Isolated DIDO, 4 In/ 4out (Optional) (Programmable by S/W AP)
	: 8 x NMEA 0183 (Optional) (RS422/485 programmable by S/W AP)

### Mechanical and Power

Dimensions (L x W x H)	: 276.4 mm x 206.8 mm x 60.2 mm
Construction	: Aluminum housing
Power Input	: 9~36V DC Input with 1.5KV Lsolation (only 24V DC Acceptable by IEC60945)
Power source range	: Typical 40 W power consumption
Mounting	: VESA / Wall-mount / Desktop
Appearance color	: Black

### Environment Considerations

Operating Temperature	: -15 to 55 deg.C
Operating Humidity	: 5% to 95% (non-condensing)
Anti-Vibration	: 0.7g@DNVGL CG-0339(Class A)
Anti Shock	: 15G, 11ms duration

### Certificate

IEC 60945 4th Edition (Test Report Available)  
CE / FCC

Note: All Specifications are subject to change without prior notice!

Revised date: 05-Sep-2018 V1.3

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660