

SPECIFICATIONS

		47LV35A	55LV35A
PANEL	Screen Size	47" (46.96" measured diagonal)	55" (54.64" measured diagonal)
	Panel Technology	IPS	IPS
	Aspect Ratio	16 : 9	16 : 9
	Native Resolution	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)
	Brightness	450cd/m²	500cd/m²
	Contrast Ratio	1,200:1	1,400:1
	Dynamic CR	500,000 : 1	500,000 : 1
	Viewing Angle (H x V)	178 x 178	178 x 178
	Response Time	12ms (Typ.)	12ms (G to G)
	Surface Treatment	Hard coating (3H), Anti-glare treatment of the front polarizer (Haze 1%)	Hard coating (3H), Anti-glare treatment of the front polarizer (Haze 10%)
CONNECTIVITY	Life time	Min. 30,000 Hrs, Typ. 50,000Hrs	Min. 50,000 Hrs, Typ. 60,000 Hrs
	Orientation	Portrait & Landscape	Portrait & Landscape
	Input (Rear)	DVI-D (1), HDMI (1) with HDCP for all input RGB (1), Component (RGB Shared), AV (RGB Shared)	DVI-D (1), HDMI (1) with HDCP for all input RGB (1), Component (RGB Shared), AV (RGB Shared)
	Audio	N/A	N/A
	External Control	RS232C (1), RJ45 (1), IR Receiver (1)	RS232C (1), RJ45 (1), IR Receiver (1)
	USB	USB 2.0 (1)	USB 2.0 (1)
	Output (Rear)	DVI-D (1)	DVI-D (1)
	Audio	N/A	N/A
	External Control	RS232C (1)	RS232C (1)
	Color	Black	Black
PHYSICAL SPECIFICATION	Bezel Width	3.2mm (left/top) / 1.7mm (right/bottom)	2.25mm (left/top) / 1.25mm (right/bottom)
	Monitor Dimension (W x H x D)	1,044.9mm x 590mm x 89.9mm	1,213.4mm x 684.2mm x 88.5mm
	Weight (Head)	16.5kg	23kg
	Carton Dimensions (W x H x D)	1,180mm x 165mm x 770mm	1,353mm x 850mm x 255mm (Box outer size)
	Packed Weight	21.5kg	30kg
	Handle	Yes	Yes
	VESA™ Standard Mount Interface	600mm x 400mm	600mm x 400mm
	Temperature Sensor	Yes	Yes
	Cooling FAN	No	No
	Tile Mode	Yes, Up to 15 x 15	Yes, Up to 15 x 15
SPECIAL FEATURES	Natural mode @Tile mode	Yes	Yes
	Source Selection	Digital (HDMI / DVI) / Analog (RGB) / Component / USB	Digital (HDMI / DVI) / Analog (RGB) / Component / USB
	Brightness / Contrast / Backlight	Yes	Yes
	Position / Size	Yes	Yes
	Auto Config / Phase	Yes	Yes
	ISM Method	Normal, Color Wash	Normal, Color Wash
	Input Label	Yes	Yes
	Auto Power / Source Memory	Yes	Yes
	DPM Select	Yes (Installation Menu)	Yes (Installation Menu)
	Energy Saving	Yes, Off / Minimum / Medium / Maximum / Screen Off	Yes, Off / Minimum / Medium / Maximum / Screen Off
ENVIRONMENT CONDITIONS	Smart Energy Saving	Yes	Yes
	Operation Temperature	0°C ~ 40°C	0°C ~ 40°C
	Operation Humidity	10% ~ 90%	10% ~ 80%
	Power Supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz
	Power Type	Built-in Power	Built-in Power
	Power Consumption	Typ. 130W	160W
	Smart Energy Saving	85W	90W
	DPM	0.7W	0.7W
	Power Off	0.5W	0.5W
	Safety	UL / cUL / CB / TUV / KC	UL / cUL / CB / TUV / KC
STANDARD (CERTIFICATION)	EMC	FCC Class 'A' / CE / KCC	FCC Class 'A' / CE / KCC
	ErP / Energy Star	Yes / Yes (Energy Star 6.0)	Yes / Yes (Energy Star 6.0)
	External Media Player Attachable	Yes	Yes
	SuperSign-W lite	No	Yes
	Editing, Scheduling, Distribution & Play, Control	-	Yes
	Accessory	Remote Controller, Power cable, DVI Cable, Manual, IR Receiver, RS-232C Cable, Guide Bracket, Screw	Remote Controller, Power cable, DVI Cable, Manual, IR Receiver, RS-232C Cable, Guide Bracket, Screw
	Optional Accessory	Wall Mount (Landscape: WM-L640V, Portrait: WM-P640V) Frame Kit (Horizontal: FK-47V10, Vertical: FK-47V20)	Wall Mount (Landscape: WM-L640V, Portrait: WM-P640V) 600 x 400 (AP-WX60)
MEDIA PLAYER COMPATIBILITY SOFTWARE COMPATIBILITY	SuperSign-C	Yes	Yes
	Accessory	Remote Controller, Power cable, DVI Cable, Manual, IR Receiver, RS-232C Cable, Guide Bracket, Screw	Remote Controller, Power cable, DVI Cable, Manual, IR Receiver, RS-232C Cable, Guide Bracket, Screw
	Optional Accessory	Wall Mount (Landscape: WM-L640V, Portrait: WM-P640V) Frame Kit (Horizontal: FK-47V10, Vertical: FK-47V20)	Wall Mount (Landscape: WM-L640V, Portrait: WM-P640V) 600 x 400 (AP-WX60)
ACCESSORY	Accessory	Remote Controller, Power cable, DVI Cable, Manual, IR Receiver, RS-232C Cable, Guide Bracket, Screw	Remote Controller, Power cable, DVI Cable, Manual, IR Receiver, RS-232C Cable, Guide Bracket, Screw
	Optional Accessory	Wall Mount (Landscape: WM-L640V, Portrait: WM-P640V) Frame Kit (Horizontal: FK-47V10, Vertical: FK-47V20)	Wall Mount (Landscape: WM-L640V, Portrait: WM-P640V) 600 x 400 (AP-WX60)

Super Narrow Bezel VIDEO WALL DISPLAY LV35A

47LV35A | 47" CLASS (46.96" measured diagonal)

55LV35A | 55" CLASS (54.64" measured diagonal)



Super Narrow Bezel

47LV35A : 4.9mm
55LV35A : 3.5mm

Lighter & Thinner Cabinet

47LV35A : Weight 16.5kg, Depth 89.9mm
55LV35A : Weight 23kg, Depth 88.5mm

Higher Brightness Uniformity 80%

Dynamic Video-wall Configuration

Video Wall S/W to freely configure the layout and content

Free S/W for Remote Monitor & Control

Remotely monitor display status & control

24/7 Operation

Brightness

47LV35A : 450nit
55LV35A : 500nit

Portrait & Landscape Mode

Interfaces

RGB in, HDMI in, DVI in, DP in/out,
RS232C in/out, RJ45, USB

DISPLAY


SUPER NARROW BEZEL

47" super narrow bezel 4.9mm and 55" super narrow bezel 3.5mm video wall displays create visually stunning digital wall that is easily installed, maintained and managed.




HIGHER BRIGHTNESS UNIFORMITY

Brightness uniformity 80% ensures high-quality image delivered across displays.



WIDE VIEWING ANGLE

IPS panels have the better control of liquid crystal and in consequence, it allows you to watch the screen virtually at any angle.

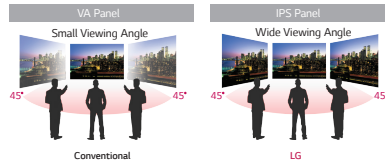


TEMPERATURE RESISTANT PANEL TEMPERATURE



SOFTWARE

SUPERSIGN V FOR DYNAMIC LAYOUT

- Use given templates to configure video wall layout easily
- Rotate, cut and edit content according to a defined layout
- Flexible content editing in various layouts is viable
- Scheduled-based content playback based on time and day
- Distribute content to media players as well

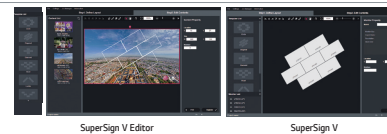

FREE SUPERSIGN C FOR ADVANCED COLOR ADJUSTMENT

- Intuitive GUI in SuperSign C S/W allows to measure and adjust color and brightness instantly on display
- Automatic white balancing of a video-wall display using a sensor




FREE SUPERSIGN C FOR REMOTE MONITOR AND CONTROL

Intuitive GUI-based Remote Monitoring & Control via the networks and RS232 connection feature in SuperSign C S/W.



DIMENSION (unit : mm)

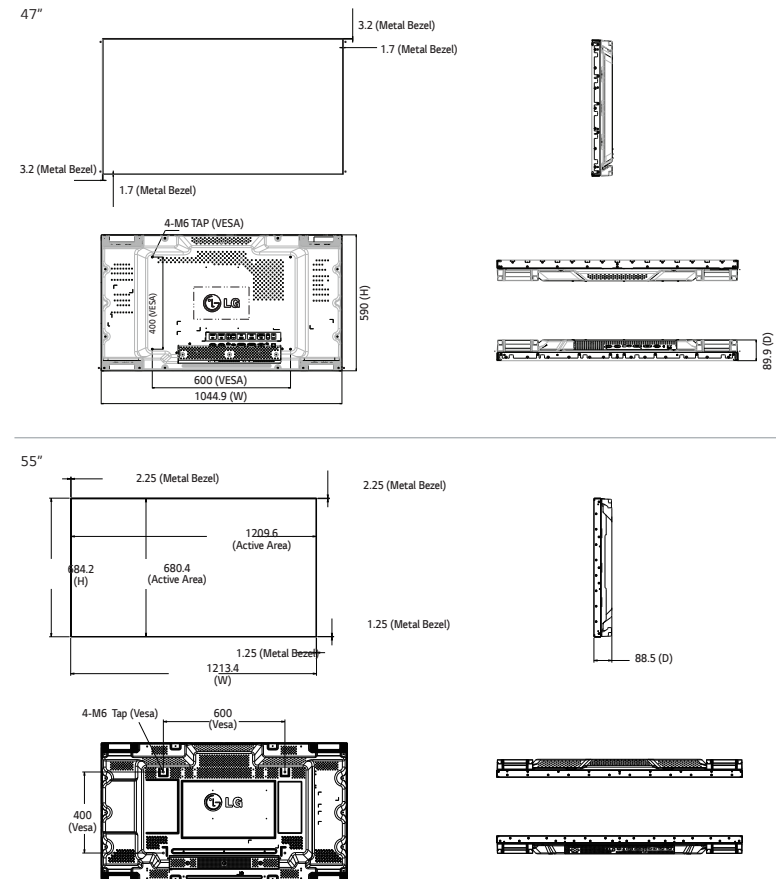

INTERFACE



Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660