


# EBC 500

5.25" Intel® Core™ 2 Duo/ Core™ Duo/ Core™ Solo Embedded  
CPU Board with 2 x PCIe GbE LAN/ 1 x PCIe x16

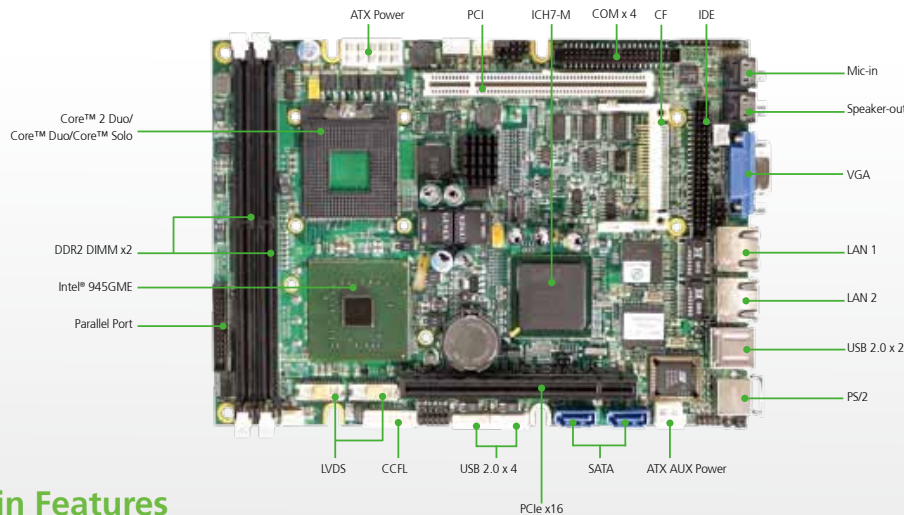

## Main Features

- Supports Intel® Core™ 2 Duo, Core™ Duo & Core™ Solo Processor Family
- Intel® 945GME Chipsets
- 2 x 240-pin DDR2 DIMM Sockets Support Un-buffered Non-ECC DDR2 400/533/667 up to 2GB
- 2 x Intel® 82573L PCI Express Gigabit LAN
- Supports LVDS/VGA Display and 1 PCIe x16 Slot
- CompactFlash Socket

## Product Overview

The EBC 500 is a 5.25" form factor embedded board computer utilizing the latest Intel® Core™ 2 Duo processor with Intel's 65-nanometer technology and new micro-architecture. EBC 500 supports Intel® Core™ 2 Duo, Core™ Duo, Core™ Solo, and Celeron® M family processors up to 2.17 GHz with 533/667 MHz FSB and up to 4MB L2 cache. The incorporated mobile Intel® 945GME and ICH7-M DH chipset supports two 240-pin DDR2 DIMM socket up to 2GB un-buffered non-ECC DDR2 533/667 MHz, one PCI express x16 slot for superb graphic display and two PCI express x1 Gigabit Ethernet LAN for fastest network connection. The EBC 500 also supports two SATA, IDE, CF, six USB 2.0, VGA & LVDS, four COM, and Parallel port. The RoHS compliant EBC 500 embedded board computer consumes very low power and is designed to deliver higher processing power with greater performance-per-watt to fit in various environments for embedded applications. The new Intel® Core™ 2 Duo processor in the EBC 500 has a flexible design that is able to create new solutions for various environments.

## Specifications

### CPU Support

- Intel® Socket M
- Supports Intel® Core™ 2 Duo, Core™ Duo, Core™ Solo family processors with 533/667 MHz
- Intel® Embedded Processor List (Intel® Longevity CPU):  
Core™ 2 Duo Processor (T7400 2.16GHz)  
Core™ Duo Processor (T2500 2.0GHz)  
Core™ Solo Processor (Celeron® M 440 1.86GHz)

### Main Memory

- 2 x 240-pin DDR2 DIMM socket, up to 2GB un-buffered non-ECC DDR2 400/533/667 SDRAM
- \* Note: Maximum 4GB. Actual memory size is dynamic based on the OS I/O resource allocation

### Chipset

- Intel® 945GME Graphics Memory Controller Hub (GMCH)
- Intel® 82801 GHM ICH7 Mobile Digital Home (ICH7-M DH)

### BIOS

- Award system BIOS
- Supports Soft off, Wake on LAN, Power On by PS2 Keyboard Function Key, RTC alarm Power On
- Power on after power failure
- Plug & Play support

- 4M bits flash ROM

### On-board LAN

- 2 x Intel® 82573L PCI Express Gigabit Ethernet
- Supports Boot From LAN (PXE)
- Supports Wake on LAN (When 5Vsb power available). (LAN1 only)
- 2 x RJ45 with LED

### Display

- Intel® 945GME chipset with integrated graphics controller, Max. 128MB by Intel® Dynamic Video Memory Technology (DVMT) 3.0
- Analog VGA interface:  
1 x DB15 VGA port Resolution up to 1400X1050 (Tested); Chipset supports up to 2048 x 1536
- LVDS interface: 2 x DF13 20-pin LVDS connector for internal connection, supports single (18bit) or dual pixel (36bit) LVDS panel
- CCFL interface: 1 x CCFL for LCD Panel Backlight Inverter

### Audio

- Realtek ALC655 CODEC for AC'97 v2.1 CODECI
- Interface: Mic-in and Speaker-out connector, Line-in with pin header

### Expansion

- 1 x PCIe x16 slot
- 1 x PCI slot


### I/O Interface

- USB 2.0: 2 ports edge connector

www.nexcom.com



## Block Diagram

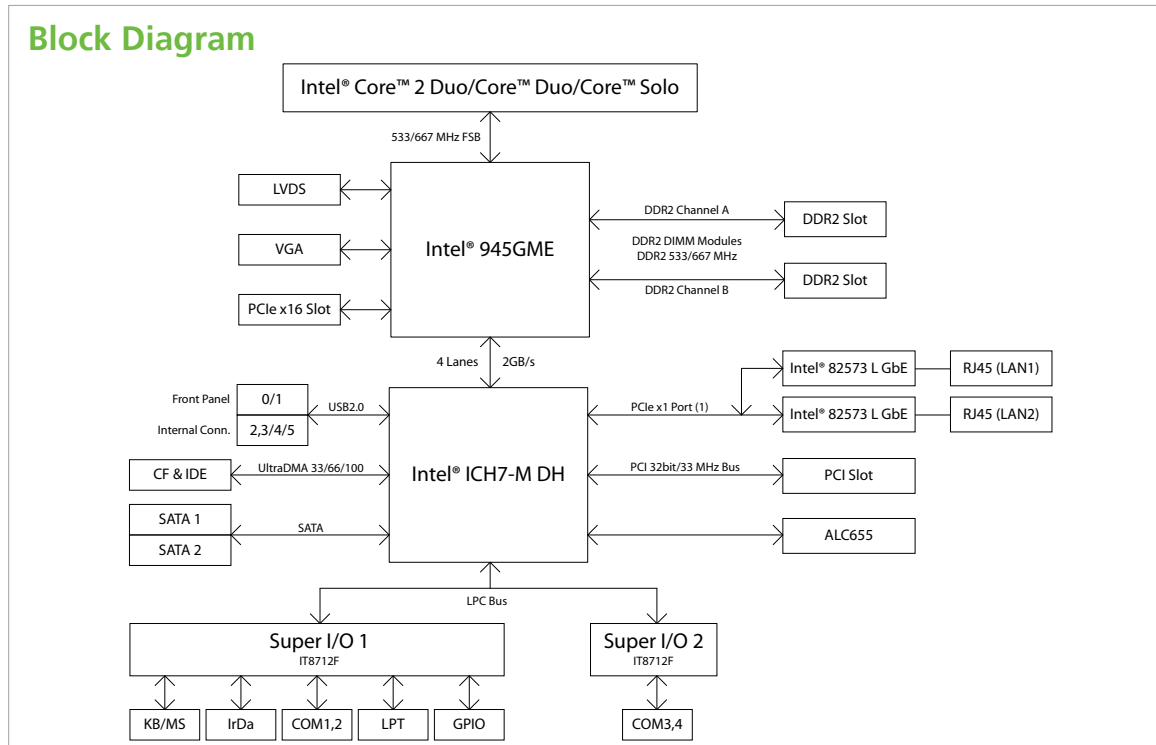

- USB 2.0: 4 ports, by 1x6 2.5mm JST connector
- Serial ports: 4 x SIO, with 2x20 box header (2.0mm) support RS-232 only 1 x jumper to switch 5V and 12V power source
- Parallel port: 1 port, with 2x13 box header (2.0mm)
- PS/2: 1 x Mini-Din Keyboard/Mouse
- GPIO: Support 4 sets of general purpose I/O each with TTL level (5V) interface
- FAN: Two 1 x 3-pin connectors for system Fan, one 1 x 4 pin connector for CPU Fan
- 1 x on-board 5-pin header for IrDA, TX, RX
- SMBus2.0/Reset/On off switch button

### Watchdog Timer

- Watchdog Timer is programmable by software from 1 to 255 seconds (Tolerance 10% under room temperature 25°C)

### Storage

- 2 x SATA II ports
- 1 x IDE 44-pin connector
- 1 x CF internal socket, supports One Type I& II Compact Flash Card (Primary Master)

### System Monitor

- 8 voltage (For +3.3V, +5V, +12V, Vcore and +1.5V, +1.8V, +5VSB, +3 VSB)
- 3 Temperatures (CPU, two external Temperature Sensor)
- 3 FANs speed (CPU and System FANs)

### On-board RTC

- On-chip RTC with battery back up
- 1 x External Li-ion Battery
- RTC Tolerance less than 2sec (24 hours) under 25°C environment

### Power Requirements

- Supports both AT and ATX Mode (default setting is AT mode)

|                                         |        |        |
|-----------------------------------------|--------|--------|
| CPU: P-M 2.17GHz<br>Memory: 2 x 1G DDR2 | +12 V  | +5 V   |
| Full-Loading Mode                       | 3.25 A | 4.97 A |
| Light-Loading Mode                      | 0.40 A | 2.97 A |

### \* NOTE:

1. Full Loading: Utilize CPU 100% with Burn-in test running
2. Light Loading: Utilize CPU loading below 5% without data or application running.

### Dimensions

- 5.25" form factor: 203mm (L) x 146mm (W) (7.9" x 5.7")

### Environment

- Board level operating temperature: 0°C to 60°C
- Storage temperature: -20°C to 80°C
- Relative humidity: 10% to 90% (Non-condensing)

### Certifications

- CE approval
- FCC Class A

## Ordering Information

### ♦ EBC 500 (P/N: 10E00050000X0) RoHS Compliant

5.25" Embedded Board supporting Intel® Core™ 2 Duo, Core™ Duo and Core™ Solo CPU w/ VGA/LVDS/Audio/4 COMs/6 USB2.0/Dual Gigabit LAN

### ♦ Packing List

| Part No.      | Description                |
|---------------|----------------------------|
| 60233USB59X00 | USB CABLE                  |
| 60233POW73X00 | POWER CABLE (2x10 TO 2x5 ) |
| 60233POW34X00 | POWER CABLE (BIG 4P)       |
| 60233MK202X00 | PS2 Y CABLE                |
| 60233IDE86X00 | IDE CABLE 44P TO 40P       |
| 60233ATA06X00 | SATA CABLE L: 330mm        |
| 6023325262X00 | PRINT CABLE                |
| 6023309402X00 | COM CABLE L: 300mm         |

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660