


**Rugged Computer**



# Rugged Computer RSL 82

Embedded Rugged Computer with Intel® Atom™ Elkhart Lake processor (x6000 Series)

PRELIMINARY

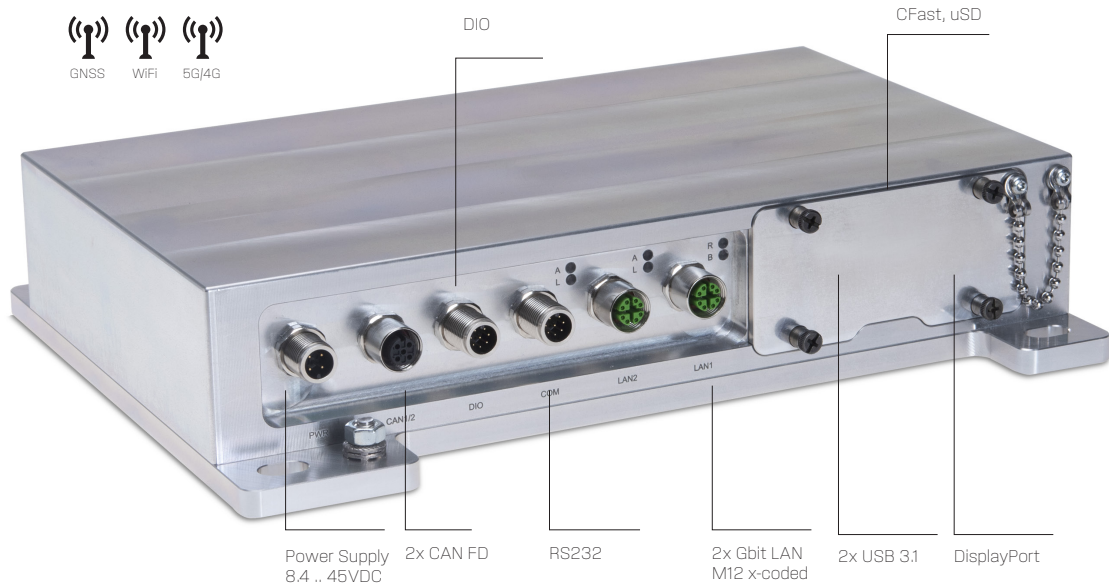

**Product Highlights**

- Maintenance free
- Long term availability
- Power Ignition controller
- Inertial measurement unit (IMU)
- Trusted platform module (TPM 2.0)
- UEFI Secure Boot
- GNSS with dead reckoning
- Fanless, no moving parts

**Market/Applications**

- Heavy Industry
- Agriculture
- Construction
- Mining vehicles
- Automated guided vehicles (AGV)
- Outdoor applications
- Transportation

## RPC RSL 82

This fanless Rugged Computer RSL 82 generation is based on the Intel® Atom™ Elkhart Lake (EHL) processor technology, using the new 10nm "Tremont" architecture, it offers a wide range of interface options. The robust and uncompromising industrial design allows the implementation in the most demanding applications and guarantees long term availability.

- Intel® Atom™ Elkhart Lake Series
- Rugged aluminium housing
- IP 67/69 approved
- Schock and vibration resistant

# Rugged Computer RSL 82



Order Code **RPC/RSL82H15-A154E<sup>1</sup>**

Processor / Performance		
Intel® Atom™ x6425RE - Quad core 1.9GHz clock   16GB RAM		✓
Intel® Atom™ x6414RE - Quad core 1.5GHz clock   4GB RAM		on request
Memory / Storage		
L2 cache		1.5MB
4267MT/s LPDDR4x RAM soldered on board		16GB
Internal eMMC		32GB
CFast socket with latching retainer <sup>2</sup>		1
MicroSD Card socket <sup>2</sup>		1
Features		
Real time clock PC compatible with Goldcap backup (up to 48h)		✓
Hardware Watchdog & Temperature supervisor		✓
Intelligent power management (Ignition controller)		✓
TPM 2.0 according to ISO/IEC11889		✓
UEFI Secure Boot key material must be provided by customer		✓
Inertial measurement unit STMicroelectronics ISM330DHCXTR (Please see user documentation for more detailed information and maximum sampling rate)		✓
Communication Interfaces		
DisplayPort 1.4 (4096 x 2160 @ 60Hz)		1
USB version 3.1	(Type A)	2
Ethernet 10/100/1000 BASE-T (1x Intel® GbE   1x Intel® I210-IT)	(M12 female x-coded)	2
Serial RS232 (not isolated)	(M12 male, 8P a-coded)	1
Digital I/O, 24VDC, (4 inputs, 4 outputs)	(M12 male, 8P a-coded)	1
CAN 2.0A/B & CAN FD (PEAK FPGA chip, SJA1000 compatible) active/passive, isolated	(M12 female)	2
M.2 Key B socket <sup>2</sup>	(3042)	1
M.2 Key E socket <sup>2</sup>	(2230)	1
Mini PCIe socket <sup>2</sup>		1
Buzzer		✓
Wireless connectivity		
4G LTE Cat-13 (3G fallback) Sierra Wireless EM7590 - M2M only <sup>1</sup>	(2x SMA)	✓
Dual nano SIM slot for cellular modules for 4G module		✓
GNSS module u-blox NEO-M9V Module	(1x SMA)	✓
High precision GNSS module (with IMU, RTK) u-blox ZED-F9P/R	(1x SMA) <sup>3</sup>	on request
Wireless LAN (Wi-Fi 6) 802.11ac(a/b/g/n)/ax Intel, Bluetooth 5.2 Module Intel Wireless- AX210	(2x RP-SMA)	✓
Technical Data		
Exterior Dimensions [mm] (housing incl. mounting plate)		w276 x h58 x d210
Net weight [gram]		~3500
Non-isolated input voltage, with Ignition controller function, reverse polarity protected	(M12 4P male a-coded)	8.4..45VDC
Interruption of voltage supply time		EN50155 - Class: S1
Power consumption typ. in Watt @ 24V without Add-Ins, idle		-17
Environmental Conditions		
Operating temperature (complies with EN50155 class OT4/ST0) <sup>4</sup>		-40°C ... +70°C
Non operating temperature (Recommended storage temperature 20°C .. 25°C)		-40°C ... +85°C
Ingress protection standard according to EN60529		IP67, 69
Conformal coating <sup>5</sup>		PCX
MTBF @ 25°C according to Telcordia SR-332, Environment 6B, excluding CFast and optional interfaces		378'088 hours
Certifications		
Shock EN60068-2-27 / EN61373		✓
Vibration EN60068-2-64 / EN61373		✓
EMI-Conformity EN50121-3-2 / EN301489-1		✓
Safety (according to EN62368-1)		designed to meet
Fire protection DIN EN45545-2		HL3
UKCA/CE		✓
Software		
Linux Debian 10.0		✓
BSP Windows 10 IoT Enterprise LTSC		✓

**Scope of delivery**  
 3x Protective cap for M12 Female  
 3x Protective cap for M12 Male  
 5x Protective cap for SMA  
 1x Device packaging

<sup>1</sup>Please contact factory for minimum order quantities  
<sup>2</sup>Internal connector  
<sup>3</sup>Multiband antenna needed (GNSS L1 band and L2/E5b/B21 bands). Example u-Blox type ANN-MB  
<sup>4</sup>Depending on installation situation and interface connection. Please see user documentation.  
<sup>5</sup>on all possible components (excl. Connectors and wireless devices)

Product specifications subject to change without notice. All data is for information purposes only and not guaranteed for legal purposes. Information in this data sheet has been carefully checked and is believed to be accurate. However, no responsibility is assumed for inaccuracies. Please refer to the user documentation for additional product specification.

For support and further information:  
[sales@syslogic.com](mailto:sales@syslogic.com)  
 or [syslogic.com](http://syslogic.com)

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660