

R17IB3S-67M1ST

17" Intel® Celeron® N2930 IP67 Stainless Resistive Chassis Panel PC



KEY FEATURES

- 17" 1280x1024 resistive touch, IP67 Stainless Resistive Chassis Panel PC
- Intel® Celeron® Bay Trail-M N2930 1.83GHz Processor
- Stainless Housing with Anti-Corrosion Treatment
- Optical Bonding with Anti-moisture Treatment
- 5 Wire Resistive Touch/ Anti-Reflection Protection Glass (Optional)



OVERVIEW



Waterproof All-Around

The display fully complies with IP67 water and dust resistance to survive splashing conditions during stringent cleanup processes and strict hygiene demands in the Food, Beverage, and Pharmaceutical industries.



Resistive Touch/Anti-reflective Protection Glass

The display is highly resistant to cold temperatures, wet fingers, and dusty conditions. Plus, the protective glass serves to protect the display against sharp foreign objects, meaning the screen is still operable even with scratches on the surface.



Fully Sealed Connector and Cable Protection


IP67 protection means these displays are highly resistant to dust and water, meaning it can be installed in the harshest industrial environments.

SPECIFICATIONS

Display			
Resolution	1280x1024	Size	17 inches
Contrast Ratio	1000:1	Panel Brightness	350 nits
View Angles	85,85,80,80	Active Area	337.920x270.336 mm
Touch / Glass	Resistive Touch Screen Bonding with Panel Protection Glass w/o Touch Function (Optional)		
System Specification			
Processor	Intel Celeron N2930 1.83GHz (up to 2.16GHz)	Memory	1 x SO-DIMM, DDR3L 1600 MHz, 4GB 8GB (Optional)
Storage	1 x mSATA SSD 128GB. mSATA SSD up to 512GB. (Optional)	Ethernet controller	2 x Intel® Ethernet Controller
Operating System	Windows 10 IoT Enterprise (64 bit) (Optional) Linux Ubuntu 20.04 (Optional)	WLAN	Support (Optional)
BT	Support (Optional)		
Mechanical			
Dimension	418 x 350 x 59 mm	Mounting	VESA Mount Yoke Mount
Enclosure	Stainless Housing	Cooling System	Fanless design

Environment	
Operating Humidity	10% to 90% RH, Non-Condensing
Storage Temperature	-20°C to 60°C
Operating Temperature	0°C to 45°C
IP rating	IP67
Certification	
Certification	CE, FCC
IO Ports	
USB Port	1x M12 Waterproof Connector for 2 x USB2.0
LAN	1 x Waterproof Giga LAN RJ45 Connector
Serial Port	1 x M12 waterproof connector for RS232
Indicator	1 x LED Indicator for power 1 x LED Indicator for storage
Control	
Button	1 x Power Button 1 x Reset Button
Accessory	
Accessory	100~240V AC to DC Adapter with waterproof connector Power Cord External USB cable with waterproof connector External COM cable with waterproof connector External LAN cable with waterproof connector Waterproof caps Manual VESAs screws
Power	
Power Rating	12V DC (M12 type)

DIMENSIONS UNIT:MM

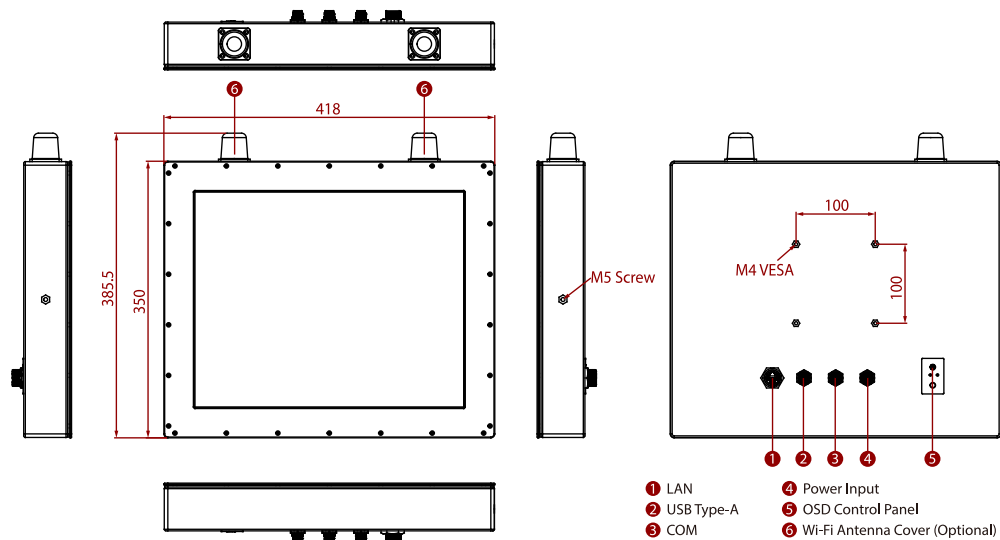

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
3. All specifications are subject to change without prior notice.

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660