

# W10IB3S-MRH2

## 10.1" Intel® Celeron® N2930 Flat PCAP ECDIS Marine Panel PC



### KEY FEATURES

- 1280 x 800 resolution
- P-Cap multi-touch screen
- Front IP65 and full IP44 ratings
- Isolated connectors (M12 type)
- Wireless communications - Wi-Fi, WWAN, GPS (optional)
- Optical bonding with touch screen available on request



### SPECIFICATIONS

Display			
<b>Resolution</b>	1280x800	<b>Size</b>	10.1 inches
<b>Contrast Ratio</b>	800:1	<b>Panel Brightness</b>	350.0 nits
<b>View Angles</b>	85,85,85,85	<b>Active Area</b>	216.96x135.6 mm
<b>Touch / Glass</b>	Projected Capacitive Multi Touch Screen		
System Specification			
<b>Processor</b>	Intel Celeron N2930 1.83GHz (up to 2.16GHz)	<b>Memory</b>	1 x SO-DIMM, DDR3L 1600 MHz, 4GB 8GB (Optional)
<b>Storage</b>	1 x mSATA SSD 128GB. mSATA SSD up to 512GB. (Optional)	<b>Ethernet controller</b>	2 x Intel® Ethernet Controller
<b>Operating System</b>	Windows 10 IoT Enterprise (64 bit) (Optional) Linux Ubuntu 20.04 (Optional)	<b>WLAN</b>	Support (Optional)
<b>BT</b>	Support (Optional)		
Environment			
<b>Operating Humidity</b>	5% to 95%	<b>Operating Temperature</b>	-15~55°C
<b>Shock</b>	15G,11ms duration	<b>Vibration</b>	0.7g@DNVGL CG-0339 (Class A)
<b>IP rating</b>	IP66 (Front Side)		
Certification			
<b>Certification</b>	CE / FCC DNVGL-CG-0339 IEC 60945 4th Edition (Test Report Available)		
IO Ports			
<b>USB Port</b>	1 x USB2.0 (M12 type)	<b>Serial Port</b>	2 x RS-422 (M12 type)
<b>LAN</b>	1 x Gigabit LAN (M12 type)		
Mechanical			
<b>Dimension</b>	263 x 172 x 40.5 mm	<b>Weight</b>	2.9 kg
<b>Mounting</b>	VESA Mount	<b>Enclosure</b>	Metal
<b>Cooling System</b>	Fanless Design		
Power			
<b>Power Rating</b>	9-36V DC (M12 type)	<b>Consumption</b>	30W (Typical)


**Accessory**

- Accessory**
- User Manual (Hardcopy)
  - 1 x Driver CD
  - 1 x External M12 Power Cable
  - 1 x AC Adapter
  - 1 x Power Cord
  - 1 x 3 Pin Terminal Block (Phoenix type)
  - 1 x External M12 USB/LAN Cable
  - 1 x RS-422 M12 Cable
  - 3 x I/O Protective Cap

**Control**

- Button**
- 1 x Power Button
  - 1 x Reset Button

**DIMENSIONS** UNIT:MM

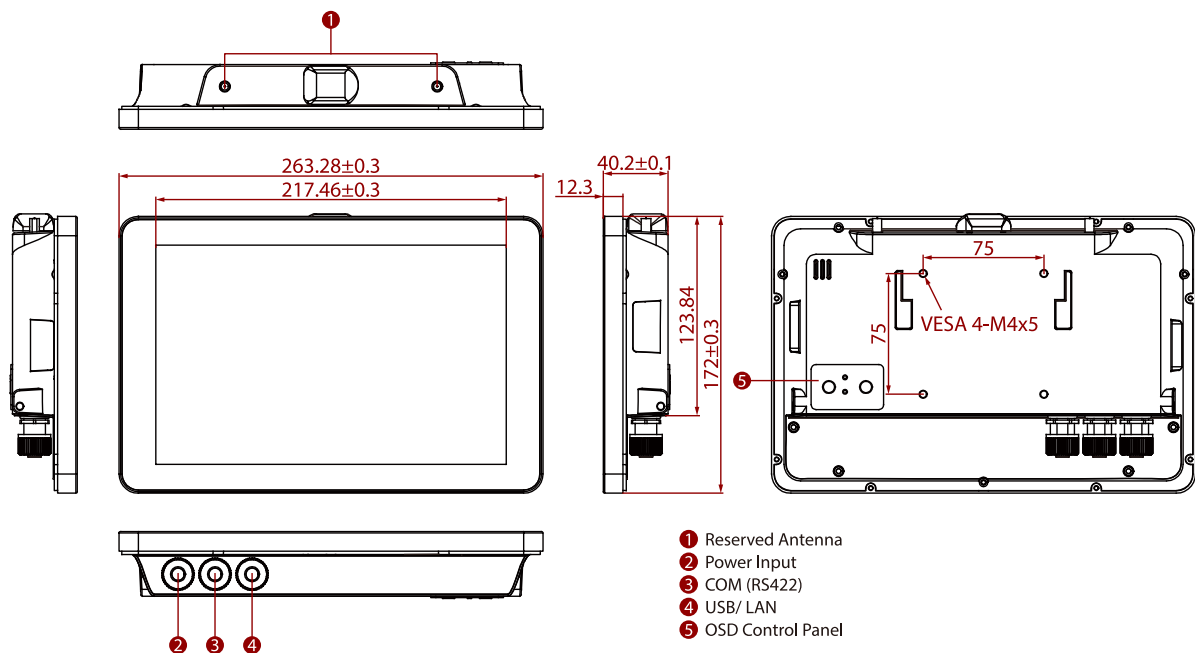

**NOTE**

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660