

ICO310

Robust DIN-rail Fanless Embedded System with Intel® Celeron® Processor N3060/N3160, 2 COM, 4 USB, 2 GbE LANs (1 PoE PD), DIO and RTC


Features

- Fanless design
- Intel® Celeron® processor N3060 (1.6 GHz/2-core) or N3160 (1.6 GHz/4-core)
- 2 RS-232/422/485 ports
- 4 USB ports
- 2 isolated 10/100/1000 Mbps Ethernet ports
- 1 PoE PD compliant with IEEE 802.3at standard through LAN 1
- 1 DIO port
- Supports wireless (3G/GPRS & Wi-Fi)
- 1 mSATA & SATA SSD (or HDD)
- 12-24 VDC wide range power input



Specifications

Standard Color	White
Construction	Extruded aluminum and heavy-duty steel, IP40
CPU	Intel® Celeron® processor N3060 (1.6 GHz/2-core) or N3160 (1.6 GHz/4-core)
System Board	SBC87887
System Memory	1 x DDR3L-1600 SO-DIMM, up to 8GB
BIOS	AMI UEFI BIOS
System I/O Outlet	Serial Port 2 x RS-232/422/485 (COM 1/2) with DB9 connectors Interface select by BIOS Supports Auto Flow Control in RS-485 mode
	USB 2 x USB 3.0 2 x USB 2.0
RTC	Battery onboard
Storage	1 x mSATA 1 x SATA SSD (or HDD)
LAN	2 x 10/100/1000 Mbps Ethernet (Intel® i211AT) 1 x PoE PD compliant with IEEE 802.3at standard through LAN 1 (ICO310-N3060-PD-DC, ICO310-N3160-PD-DC)
Power Input	DC terminal block: 12-24V DC-In PoE: IEEE 802.3at
Display	VGA
Wireless	2 x full-size PCI Express Mini Card slots 1 x SIM socket 3 x Antenna (PS: one of Mini Card slots co-lay mSATA, supports either mSATA or full size PCI Express Mini Card)
DIO	1 x DIO - DB9 8-bit programming connector - The voltage of TTL is 5V. - Without isolation function - The programming is as follow: 1. I/O sink current is 8-10mA (Output drive current ±50 mA) 2. Input/Output can programming

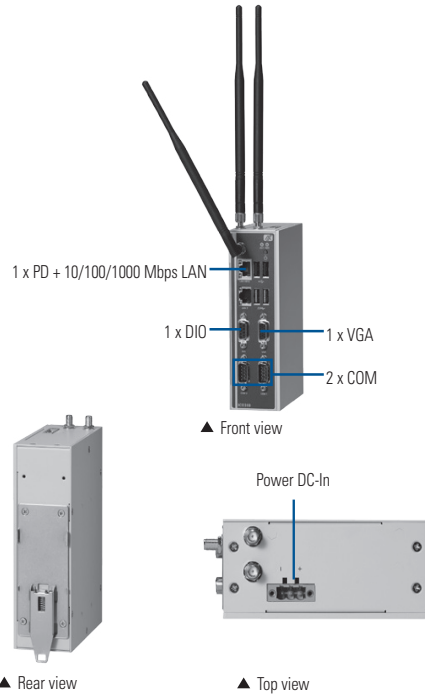

Watchdog Timer	255 levels, 1-255 sec.
System Indicator	Power, active, COMs (TX/RX)
Power Supply	Power Input Range: 12-24 VDC
	Power Input Rating: 12-24 VDC, 2.09-1.09A
	Power Protection: DC Version OVP, Reverse protection
Operating Temperature	-20°C ~ +60°C (-4°F ~ +140°F) *The frequency of CPU will down when system operating temperature over 55°C (ICO310-N3060, ICO310-N3060-PD, ICO310-N3160) or over 50°C (ICO310-N3160-PD)
Humidity	10% ~ 95%
Vibration Endurance	2G @ 5 ~ 500Hz, amplitude 0.35 mm (operation/storage/transport)
Weight	1.0 kg (2.2 lb)/1.50 kg (3.3 lb)
Certificate	CE, FCC
Dimensions	48 mm (1.88") (W) x 110 mm (4.33") (D) x 155 mm (6.1") (H)
Mounting	DIN-rail, wall mount
OS Support	Windows® 7 Embedded Windows® 8 Embedded Windows® 8, Windows® 10 Linux support package
Remote Management Software	AXView 2.0 Intelligent Remote Management Solution for IoT

* mSATA and wireless can be either one.

Ordering Information


Standard	
ICO310-N3060-DC	Robust DIN-rail fanless embedded system with Intel® Celeron® processor N3060 (1.6 GHz/2-core), 2 COM, 2 GbE LANs (-20°C ~ +60°C)
ICO310-N3060-PD-DC	Robust DIN-rail fanless embedded system with Intel® Celeron® processor N3060 (1.6 GHz/2 core), 2 COM, 1 GbE LAN, 1 PoE PD+LAN (-20°C ~ +60°C)
ICO310-N3160-DC	Robust DIN-rail fanless embedded system with Intel® Celeron® processor N3160 (1.6 GHz/4-core), 4 COM, 2 GbE LANs (-20°C ~ +60°C)
ICO310-N3160-PD-DC	Robust DIN-rail fanless embedded system with Intel® Celeron® processor N3160 (1.6 GHz/4 core), 2 COM, 1 GbE LAN, 1 PoE PD+LAN (-20°C ~ +60°C)

Optional

2.5" SATA SSD or HDD (with W.T. SSD or HDD)
mSATA 16GB ~ 512GB (with W.T. mSATA)
DDR3L SO-DIMM 2GB ~ 8GB (with W.T. memory)
Wall mount kit
Wireless (3G/GPRS or Wi-Fi) module

*Specifications and certifications are based on options and may vary.

Dimensions

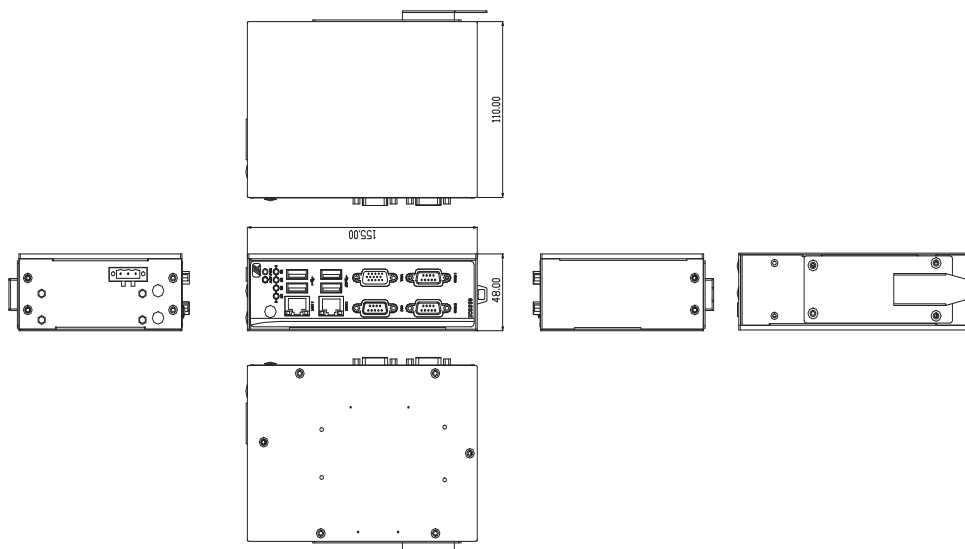

DIN-rail Embedded Systems **3**

0

1

2

3

4

5

6

7

8

9

10

11



Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660