

# LMX-1204G-SFP Series

12-Port Industrial Gigabit Managed Ethernet Switch, with 8\*10/100/1000Tx and 4\*100/1000Fx, 12~48VDC Power Input



## Features


- ▶ Supports 8\*10/100/1000Tx and 4\*100/1000Fx Dual Rate SFP Fiber Slots
- ▶ Network Redundancy: STP/RSTP/MSTP, and G.8032 ERPS (Recovery Time <50ms)
- ▶ Supports IPv4/IPv6, and DHCP Option 66/67/82
- ▶ Supports Modbus/TCP Protocol for Device Management and Monitoring
- ▶ Configuration: Web Console, Telnet, CLI Command
- ▶ IGMP v1/v2 for Multicast Traffic Filtering
- ▶ QoS (IEEE802.1p/1Q), CoS/ToS to Increase Determinism
- ▶ IEEE802.1Q VLAN for Easy Network Planning
- ▶ Enhanced Network Security with IEEE802.1X, SNMP v1/v2c/v3, HTTPS, and SSH/SSL
- ▶ Auto Warning by Exception through E-mail, Relay Output
- ▶ Operating Temp. – STD: -10°~70°C, EOT: -40~75°C
- ▶ 5-Year Warranty

## INTRODUCTION

Antaira Technologies' LMX-1204G-SFP series is a 12-port industrial managed Ethernet switch that is embedded with 8\*10/100/1000Tx Ethernet ports and 4\*100/1000Fx SFP fiber ports that support either Single or Multi-Mode modules. The LMX-1204G-SFP series is a fully manageable Layer 2 Ethernet switch that is pre-loaded with a user-friendly web management console design. It supports the ring network redundancy function using the market's open standard ITU-T G.8032 ERPS (Ethernet Ring Protection Switch) protocol that has a <50ms network recovery time. The advanced network filtering and security functions, such as, IGMP, VLAN, QoS, SNMP, RMON, Modbus TCP, and 802.1X/ HTTPS/ SSH/ SSL increase determinism and improve network management for remote SCADA systems or control networks.

The LMX-1204G-SFP series is IP30 rated and DIN-rail mountable. There are also two wide operating temperature models for either a standard temperature range (STD: -10°C to 70°C) or an extended temperature range (EOT: -40°C to 75°C). It also provides high EFT and ESD protection for industrial networking applications, such as, power/utility, water wastewater, oil/gas/mining, factory automation, security surveillance within transportation, ITS and any other outdoor or harsh environment.

## DIMENSIONS

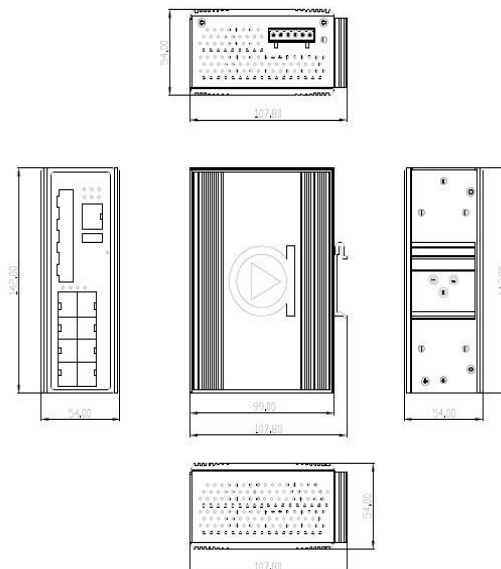

## SPECIFICATIONS

Technology		Protection	
	IEEE 802.3 10Tx Ethernet IEEE 802.3u 100Tx Fast Ethernet IEEE 802.3ab 1000Tx Gigabit Ethernet IEEE 802.3z Gigabit Fiber IEEE 802.3x Flow Control for Full Duplex IEEE 802.3ad for Port Trunk with LACP IEEE 802.1d STP (Spanning Tree Protocol) IEEE 802.1w RSTP (Rapid Spanning Tree Protocol) IEEE 802.1s MSTP (Multiple Spanning Tree Protocol) ITU-T G.8032/Y.1344 ERPS (Ethernet Ring Protection Switch) Protocol IEEE 802.1Q for VLAN Tagging IEEE 802.1x for Network Authentication IEEE 802.1p QoS/CoS Protocol for Traffic Prioritization	<b>Overload Current</b>	Present
Standards		<b>Power Reverse Polarity</b>	Present (the unit will not be on, if power reverse)
Switch Properties		<b>Network Cable</b>	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable; 100Base-TX: 2-pair UTP/STP Cat. 5 cable. EIA/TIA- 568 100-ohm (100m) 1000BaseTX: UTP/STP Cat.5/E cable; EIA/TIA- 568 100-ohm (100m)
Switch Architecture		Mechanical Characteristics	
	Back-Plane (Switching Fabric): 24.0Gbps IGMPv1/v2, SNMPv1/v2c/v3, TFTP, SNMP, SMTP, RMON, HTTP, HTTPS, Telnet, Syslog, DHCP Option 66/67/82, SSH/SSL, Modbus/TCP, LLDP, IPv4/IPv6, NAT, DHCP per port, SMTP, Quick ERPS, TLS	<b>LED Indicator</b>	Per Unit: Power 1 & 2 (Green), Fault (Red)
Protocol		<b>Housing</b>	Metal IP30 rated
	Store-and-Forward	<b>Dimensions</b>	54 x 142 x 99 mm
Data Process		<b>Weight</b>	Unit: 2.5 lbs Shipping: 3.0 lbs
	14,880pps for 10Base-T Ethernet 148,800pps for 100Base-T Fast Ethernet 1,488,000pps for Gigabit Ethernet	<b>Mounting</b>	DIN-Rail; Wall-mount (Optional)
Transfer Rate		Power Requirement	
	4 Mbits	<b>Input Voltage</b>	12~48VDC Redundant Input
Packet Buffer		<b>Power Connection</b>	1 removable 6-contact terminal block
	8K	<b>Power Consumption</b>	15 Watts
MAC Table		Environmental Limits	
	9.6K	<b>Operating Temperature</b>	STD: -10° to 70°C EOT: -40° to 75°C
Jumbo Frame		<b>Storage Temperature</b>	-40°C ~ 85°C
	IEEE 802.3x for full duplex mode, back pressure for half duplex mode	<b>Ambient Relative Humidity</b>	5 to 95%, (Non-condensing)
Flow Control		Regulatory Approvals	
	0 ~ 4094	<b>EMI</b>	FCC Class A
VLAN Group		<b>EMS</b>	EN6100-4-2,3,4,5,6,8 EN6100-6-2,4
IGMP Group		<b>Free Fall Shock</b>	IEC60068-2-32 IEC60068-2-27
	Up to 256 Groups	<b>Vibration</b>	IEC60068-2-6
Port Interface		<b>Green</b>	RoHS Compliant
	8*10/100/1000Tx auto negotiation speed, Full/Half duplex mode, and auto MDI connection	<b>Certifications</b>	FCC, CE, UL 61010-1, 61010-2-201, Class 1 Division 2 NEMA TS2, ATEX
Ethernet Port		<b>Warranty</b>	5 Years
	4*100/1000 Dual Rate SFP Slots		
Fiber Port			
	Dependent on Fiber type and Distance		
Wavelength			
	1*RS232 in RJ45 connector with console cable, 115.2bps,8,N,1		
RS232 Serial Console			
	1*USB 2.0		
Configuration Backup			

## ORDERING INFO

<b>LMX-1204G-SFP</b>	12-Port Industrial Gigabit Managed Ethernet Switch, w/10*10/100/1000Tx + 2*100/1000 SFP Slots
<b>LMX-1204G-SFP-T</b>	12-Port Industrial Gigabit Managed Ethernet Switch, w/10*10/100/1000Tx + 2*100/1000 SFP Slots; EOT: -40° to 75°C

### Optional Accessories

<b>MDR-20-24</b>	20 Watt Industrial Slim Single Output DIN-Rail Power Supply – 24VDC / 1.00 Amp
<b>MDR-40-48</b>	40 Watt Industrial Slim Single Output DIN-Rail Power Supply – 48VDC / 0.83 Amp
<b>DR-75-48</b>	75 Watt Industrial Single Output DIN-Rail Power Supply – 48VDC / 1.6 Amps
<b>SFP-M-T</b>	1 Gigabit Fiber SFP Transceiver, Multi-Mode 550M / LC / 850nm, -40°C~85°C
<b>SFP-S10-T</b>	1 Gigabit Fiber SFP Transceiver, Single Mode 10KM / LC / 1310nm, -40°C~85°C
<b>DIN-RACK-2U</b>	DIN-Rail to 19" Rack Mount Adapter for all DIN-Rail Mountable Products, 2U Height

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660