

LNX-800AG Series

8-Port Industrial Gigabit Unmanaged Ethernet Switch, with 8*10/100/1000T



Features


- ▶ Supports 8-Port 10/100/1000T Gigabit Ethernet
- ▶ Supports Auto MDI/MDI-X Function
- ▶ Store-and-Forward Switching Architecture
- ▶ 16Gbps Back-Plane (Switching Fabric)
- ▶ 8K MAC Address Table
- ▶ Redundant Power Input Design: 12~48VDC
- ▶ Built-in 1 Relay Output for Power Failure Warning
- ▶ IP30 Rugged Metal Case Design
- ▶ DIN-Rail and Wall Mount Support
- ▶ Operating Temperature Range - STD: -10°C to 70°C, EOT: -40°C to 75°C
- ▶ 5-Year Warranty

INTRODUCTION

Antaira Technologies' LNX-800AG series industrial Gigabit unmanaged Ethernet switch series is IP30 rated and DIN-Rail mountable with 8*10/100/1000T, making it ideal for applications that demand a high bandwidth connectivity solution.

This series provides a high EFT and ESD protection that has a dual power input with a reverse power polarity protection. In addition, the built-in relay warning function alerts maintainers when power failures occur. There is a wide operating temperature model that supports -40°C to 75°C. The LNX-800AG series is an ideal solution for harsh outdoor weather environments and industrial applications.

DIMENSIONS

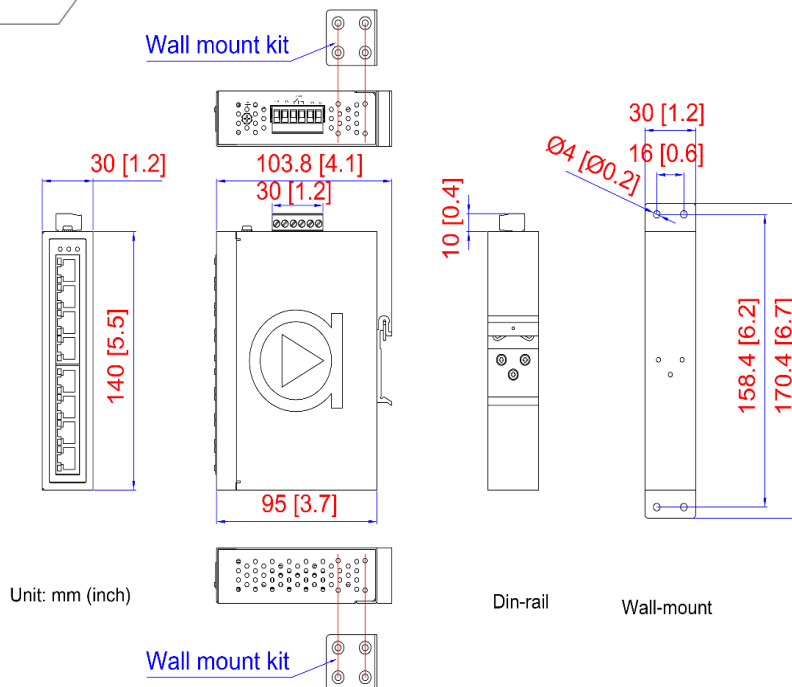

SPECIFICATIONS

Technology		Power Requirement	
Standards	IEEE 802.3 10BASE-T Ethernet IEEE 802.3u 100BASE-TX Fast Ethernet IEEE 802.3ab 1000BASE-T Gigabit Ethernet	Input Voltage	12~48VDC, Redundant Input
Processing Type	Store and Forward	Power Connection	1 removable 6-contact terminal block
Protocol	CSMA/CD	Reverse Polarity Protection	Present
Flow Control	IEEE 802.3x flow control, back pressure flow control	Overload Current Protection	Present
Switch Properties		System Power Consumption	9.2 Watts
Switch Architecture	Back-Plane (Switching Fabric): 16Gbps 14,880pps for Ethernet port 148,800pps for Fast Ethernet Port 1,488,000pps for Gigabit Ethernet Port	Relay Contact	24VDC, 1A resistive
Transfer Rate		Environmental Limits	
Memory Buffer	4Mbits	Operating Temperature	STD: -10°C to 70°C EOT: -40°C to 75°C
Jumbo Frame	9.6Kbytes	Storage Temperature	-40°C ~ 85°C
MAC Table Size	8K	Ambient Relative Humidity	5 to 95%, (non-condensing)
Interface		Regulatory Approvals	
Ethernet Port	8*10/100/1000BASE-T Auto negotiation speed, Full/Half duplex mode, auto MDI/MDI-X connection	EMI	FCC Part 15 Subpart B Class A, CE EN55032/EN61000-6-4 Class A
LED Indicators	System: Power 1, Power 2, Fault Ethernet Ports: Link/Activity/Speed	EMS	CE EN55024/EN61000-6-2 IEC61000-4-2,3,4,5,6,8
Network Cable	10BASE-T: 2-pair UTP/STP Cat. 3, 4, 5 cable EIA/TIA-568 100-ohm (100m) 100BASE-TX: 2-pair UTP/STP Cat. 5 cable EIA/TIA-568 100-ohm (100m) 1000BASE-T: 4-pair UTP/STP Cat.5/5E cable; EIA/TIA-568 100-ohm (100m)	Free Fall	IEC60068-2-32
Mechanical Characteristics		Shock	IEC60068-2-27
Housing	Metal, IP30 protection	Vibration	IEC60068-2-6
Dimensions	30 x 140 x 95 mm (W x H x D)	Green	RoHS Compliant
Weight	Unit: 1.0 lb Shipping: 1.5 lbs	Certifications	FCC, CE, UL 61010-1, UL 61010-2-201 UL Class 1 Division 2, ISA 12.12.01
Mounting	DIN-Rail mounting; Wall mounting	Warranty	5 Years

ORDERING INFO

LNX-800AG	8-Port Industrial Gigabit Unmanaged Ethernet Switch, with 8*10/100/1000T
LNX-800AG-T	8-Port Industrial Gigabit Unmanaged Ethernet Switch, with 8*10/100/1000T; EOT: -40°C to 75°C

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660