

LMX-2012G-SFP Series

20-Port Industrial Gigabit Light Layer 3 Managed Ethernet Switch, with 8*10/100/1000Tx and 12*100/1000 SFP Slots



Features


- ▶ Supports 8*10/100/1000Tx Gigabit Ethernet and 12*100/1000 SFP Slots
- ▶ Network Redundancy Support: STP/RSTP/MSTP, and G.8032 ERPS (Recovery Time <50ms)
- ▶ Supports IPv4/IPv6, and DHCP Option 66/67/82
- ▶ Supports Modbus/TCP Protocol for Device Management and Monitoring
- ▶ IGMP v1/v2/v3 for Multicast Traffic Filtering
- ▶ QoS (IEEE 802.1p/1Q), CoS/ToS to Increase Determinism
- ▶ IEEE802.1Q VLAN for Easy Network Planning
- ▶ Enhanced Network Security with IEEE802.1X, SNMP v1/v2c/v3, HTTPS, and SSH/SSL
- ▶ Auto Warning by Exception through Relay Output
- ▶ Operating Temperature Range
 - STD: -10°C to 65°C, EOT: -40°C to 75°C
- ▶ 5-Year Warranty

INTRODUCTION

Antaira Technologies' LMX-2012G-SFP series is a 20-port industrial Gigabit managed Ethernet switch that is embedded with 8*10/100/1000Tx Ethernet ports and 12*100/1000 SFP slots. The LMX-2012G-SFP series is a fully manageable light layer 3 Ethernet switch that is pre-loaded with a user-friendly web management console design. It supports the ring network redundancy function using the market's open standard ITU-T G.8032 ERPS (Ethernet Ring Protection Switch) protocol that has a <50ms network recovery time. The advanced network filtering and security functions, such as, IGMP, VLAN, QoS, SNMP, port lock, RMON, Modbus TCP, and 802.1X/HTTPS/SSH/SSL increase determinism and improve network management for remote SCADA systems or control networks.

The LMX-2012G-SFP series is IP30 rated and DIN-rail mountable. There are also two wide-operating temperature models for either a standard temperature range (STD: -10°C to 65°C) or an extended temperature range (EOT: -40°C to 75°C). It also provides high EFT and ESD protection for industrial networking applications, such as, power/utility, water wastewater, oil/gas/mining, factory automation, security surveillance within transportation, ITS and any other outdoor or harsh environment.

DIMENSIONS

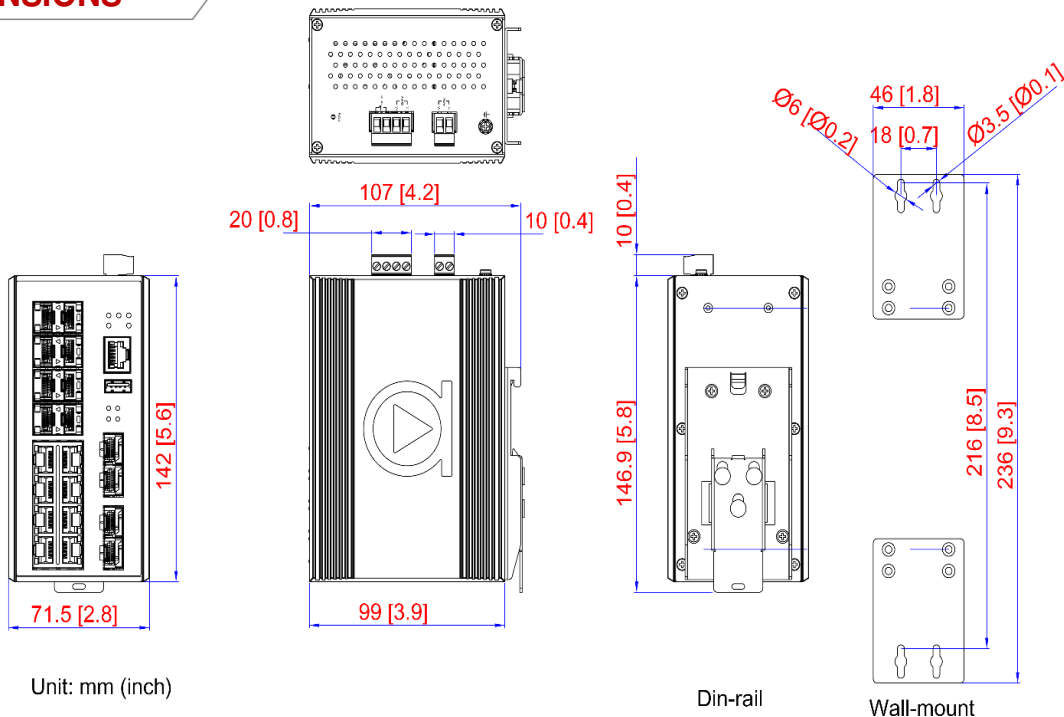

SPECIFICATIONS

Technology	Port/MAC/Protocol/IP Subnet-based VLAN, GARP/GVRP, Loop Guard, Link Aggregation static/LACP, BPDU guard, Error disable recovery, IGMP snooping v2/v3, MLD snooping v1/v2, IGMP filtering, IPMC throttling / filtering leave proxy, DHCP snooping, G.8032 v1/v2	Protection	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable EIA/TIA-568 100-ohm (100m)
L2 Switching	802.1p Queueing, Input priority mapping, Storm control for Unicast/Multicast/Broadcast, Port/Queue/ACL policer, Port egress shaper, Queue egress shaper, DiffServ (DSCP), Tag remarking, Scheduler mode	Network Cable	100Base-TX: 2-pair UTP/STP Cat. 5 cable EIA/TIA-568 100-ohm (100m) 1000Base-TX: 4-pair UTP/STP Cat.5/5E cable; EIA/TIA-568 100-ohm (100m)
L3 Switching	802.1p Queueing, Input priority mapping, Storm control for Unicast/Multicast/Broadcast, Port/Queue/ACL policer, Port egress shaper, Queue egress shaper, DiffServ (DSCP), Tag remarking, Scheduler mode	Mechanical Characteristics	
QoS	ActiPHY, PerfectReach, IEEE 802.3az EEE power management	Housing	Metal, IP30 rated
Power Saving	STP/RSTP/MSTP, port trunk with LACP, ERPS v1/v2 (<50ms)	Dimensions	71.5 x 142 x 99 mm (W x H x D)
Network Redundancy	Http, Https, Telnet, SSH, CLI, TFTP, SNMP v3	Weight	Unit: 3.4 lbs Shipping: 4.18 lbs
Configuration	Dual Image Protection, PING, PING6	Mounting	DIN-Rail mounting, Wall mounting
System / Diagnostics		Power Requirement	
Switch Properties		Input Voltage	12~48VDC Redundant Input
Switch Architecture	Back-Plane (Switching Fabric): 40.0Gbps IPv4/IPv6, SNMP v1/v2c/v3, LLDP, LLDP-MED, HTTP, HTTPS, SSHv2 telnet, DHCP client, DHCPv6 client, DHCP server, Port Mirror, DNS client/proxy, IP based Access Filter, ICMPv6, syslog, Time Zone / Daylight Saving, NTP client, RMON, sFlow, Loop detection, Console Port, Power Lost Warning, Relay Trigger	Power Connection	1 removable 4-contact terminal block and 1 removable 2-contact terminal block
Protocols		Relay Contact	24VDC, 1A resistive
Priority Queues	8	Overload Current Protection	Present (Slow-Blown Fuse)
Processing Type	Store and Forward	Reverse Polarity Protection	Present
Flow Control	IEEE 802.3x for full duplex mode, back pressure for half duplex mode	System Power Consumption	19W
Transfer Rate	14,880pps for Ethernet Port 148,800pps for Fast Ethernet Port 1,488,000pps for Gigabit Ethernet Port	Environmental Limits	
Memory Buffer	4Mbits	Operating Temperature	STD: -10°C to 65°C
Jumbo Frame	9.6Kbytes	Storage Temperature	EOT: -40°C to 75°C
MAC Table Size	8K	Ambient Relative Humidity	-40°C to 85°C 5% to 95%, (non-condensing)
VLAN Group	4095	Regulatory Approvals	
IGMP Group	1024	EMI	FCC Part 15 Subpart B Class A, CE EN55032/EN61000-6-4 Class A
Port Interface		EMS	CE EN55035/EN61000-6-2: IEC61000-4-2,3,4,5,6,8
Ethernet Port	8*10/100/1000BaseTx Auto negotiation speed, Full/Half duplex mode, and auto MDI/MDI-X connection	Free Fall Shock	IEC60068-2-32 IEC60068-2-27
SFP Port	12*100/1000 SFP Slots	Vibration	IEC60068-2-6
RS232 Serial Console	1*RS232 in RJ45 connector with console cable, 115.2Kbps, 8, N, 1	Green	RoHS Compliant
Configuration Backup	1*USB 2.0	Certifications	FCC, CE, UL 61010-1, UL 61010-2-201, NEMA TS2
LED Indicators	System: Power 1, Power 2, Status, Master, Ring Ethernet: Speed/Link/Active SFP: Link/Active	Warranty	5 Years

ORDERING INFO

LMX-2012G-SFP	20-Port Industrial Gigabit Light Layer 3 Managed Ethernet Switch, with 8*10/100/1000Tx Ports and 12*100/1000 SFP Slots
LMX-2012G-SFP-T	20-Port Industrial Gigabit Light Layer 3 Managed Ethernet Switch, with 8*10/100/1000Tx Ports and 12*100/1000 SFP Slots; EOT: -40°C to 75°C

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660