


OPS883

4th Generation Intel® Core™ i7/i5/i3 & Celeron® Processor Open Pluggable Specification (OPS) Digital Signage Player with Intel® Q87 Chipset and TPM 1.2



- | | | |
|---------------------|--------------------|----------------------|
| 1. JAE TX-25 | 6. Power Switch | 11. 2 x USB 2.0 |
| 2. Optional Antenna | 7. Reset | 12. 1 x USB 3.0 |
| 3. RS-232 | 8. HDD indicator | 13. Optional Antenna |
| 4. Ethernet | 9. Audio(Line-out) | 14. 2.5" SATA HDD |
| 5. HDMI Output | 10. Audio(Mic-in) | |

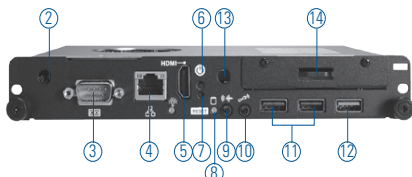

Specifications

Main System	CPU	LGA1150 socket 4th generation Intel® Core™ processor (Haswell Refresh)
	Chipset	Intel® Q87
	System Memory	1 x 204 pin DDR3-1600 SO-DIMM max. up to 8 GB
	Storage	1 x 2.5" SATA HDD tray 1 x mSATA (Option)
	Watchdog Timer	255 levels, 1-255 sec.
I/O		2 x USB 2.0 1 x USB 3.0 1 x 10/100/1000Mbps Ethernet 1 x HDMI with 4K Resolution 1 x RS-232 (COM2) 1 x power on/off button 1 x reset button 1 x Audio (Line-out) 1 x Audio (Mic-in) 1 x Display Port (via OPS JAE interconnector) 2 x USB 2.0 (via OPS JAE interconnector) 1 x USB 3.0 (via OPS JAE interconnector) 1 x Audio (Line out, via OPS JAE interconnector) 1 x UART (TX/RX, via OPS JAE interconnector) (COM1)
Indicator		1 x LED for system power ON 1 x LED for HDD active
WiFi		Optional Wi-Fi module
Expansion Slot		1 x full-size PCI Express Mini card (USB+PCI Express Signal)
Dimensions		200 mm (7.87") (W) x 119 mm (4.68") x 30 mm (1.18")
Packing Dimension		270 mm (10.63") (W) x 197 mm (7.76") x 70mm (2.76")
Weight (net/gross)		1 kg (2.21lb)/ 1.5 kg (3.3 lb)
Environmental		0°C ~ +45°C (+32°F ~ +113°F) (with airflow 1.2m/s)


Packing

1 x driver CD
1 x thermal grease
2 x M2 x 5 screw
2 x M4 x 6 screw

* All specifications and photos are subject to change without notice.

Features

- Intel® Open Pluggable Specification (OPS) compliance
- 4th Generation Intel® Core™ i7/i5/i3 & Celeron® processor (Haswell Refresh)
- Supports DDR3-1600 SO-DIMM max. up to 8 GB
- Supports 1 PCI Express Mini Card
- Supports TPM 1.2
- Easy installation and maintenance
- HDMI for 2nd display w/4K resolution
- Intel® AMT 9.0 supported

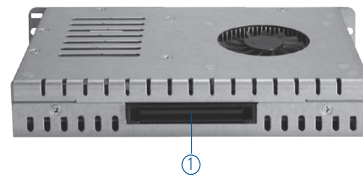

Optional OS Installation

Windows® 7, Windows® 8.1


Ordering Information

Standard		
OPS883		OPS digital signage player supports LGA1150 socket Intel® Core™ i7/i5/i3 & Celeron® processor with iAMT feature

Optional		
AX93167		OPS docking board with 4K solution

* Specifications and photos are based on options and may vary

Dimensions

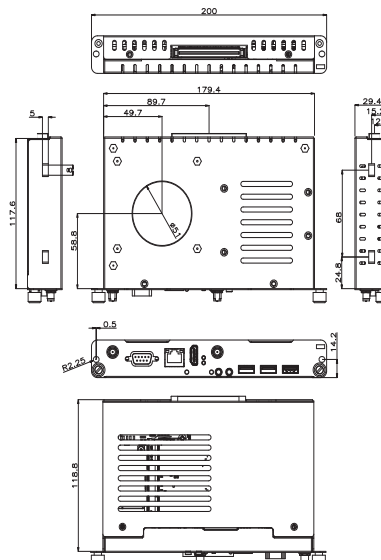

Overview

Embedded Systems

Embedded Systems for Transportation

Embedded Field Controllers

Industrial Firewall

5

Digital Signage Solutions

Embedded MicroBoxes

Industrial Barebone Systems

Industrial Chassis

Backplanes

Power Supplies

Peripherals & Accessories



Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660