



Military Grade 24" Rack Mount Panel PC (Intel® Core i7 Platform)

MODEL #: W24IH3S-MLS1-89

Mechanical Design



- 24" 1920x1200 High Resolution TFT-LCD
- Intel® Core i7 4650U 3.30GHz Processor
- Anti-Corrosion Housing / Fanless
- Compliant with MIL-STD-810F/G
- Flush Rack / Rack Mount Mechanical Design (9U)
- Convenient On-Screen Display Controls
- AC 110~240V Power input default / Isolation DC 9~36V Power input (Optional)
- Built-in Light Sensor for auto brightness control
- Military Grade Power Connector (MIL-DTL-38999/1 & 38999/3)

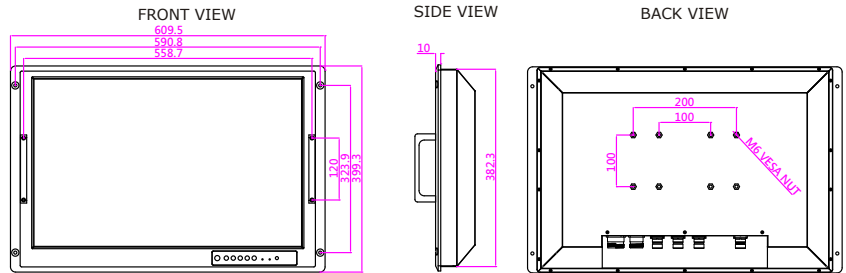

1. Ground
2. AC Power in (MIL-DTL-38999/1)
3. VGA (MIL-DTL-38999/3)
4. RS-232 (MIL-DTL-38999/3)
5. RS-232 (Optional)
6. USB 2.0 A Type (MIL-DTL-38999/3)
7. LAN (MIL-DTL-38999/3)

Measurements shown in mm.
 * Tolerance of all dimensions is shown as follow 0~30 mm ± 0.1 mm, 30~50 mm ± 0.15 mm, 50~120 mm ± 0.2 mm, above 120 mm ± 0.25 mm.
 * Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Display Specification

Characteristics :

Resolutions	: 1920 x 1200
Brightness	: 300 cd/m ² (typ.)
Contrast Ratio	: 1000 : 1(typ.)
Viewing Angles	: -89~89(H); -89~89(V)
Max Colors	: 16.7M(Colors)

Environmental (MIL-STD 810F/G Compliance)

Vibration	: MIL-STD-810F/G Method 514.5
Humidity	: MIL-STD-810F/G Method 507.4
Transit Drop	: MIL-STD-810F/G Method 516.5

System Specifications :

Processor	: Intel®Core i7 4650U 3.30GHz
BIOS	: AMI 16Mbit Flash
Processor Graphics	: Intel® HD Graphics 5000
System Memory	: 1 x SO-DIMM DDR3L 1600, Default 4GB
Lan Controller	: Intel®Ethernet Controller 1211-AT + Intel® Gigabit Etherne PHY 1218-LM
Storage	: mSATA SSD, Default 64GB
Expansion Slot	: 1 x Mini PCIe slot (for USB module)

* A customized housing is needed if you would like to have the PCI expansion.

Environment Considerations :

Operating Temperature	: 0°C~50°C Wide temperature solution by request
Storage Temperature	: -10°C~60°C
Operating Humidity	: 95%RH ±3%

Power Specifications :

Power Input	: Default AC 110~240V in Optional isolation DC 9~36V in
-------------	--

Environmental(MIL-STD 461E/F Compliance)

RE	: RE101 / RE102
CE	: CE 101 / CE102
Optional with EMI Glass / Touch	
RS	: RS101 / RS103
CS	: CS 101 / CS 106 / CS 109 / CS 114 / CS 115 / CS 116

* If you require external test report, Winmate will charge NRE fee.

I/O Connectors :

Plug & Play	: VESA DDC 1/2B
Back Panel I/O Port	: 1 x Power Input (MIL-DTL-38999/1) 1 x VGA(MIL-DTL-38999/3) 1 x RS232(MIL-DTL-38999/3) 1 x USB A 2.0Type(MIL-DTL-38999/3) 1 x LAN(MIL-DTL-38999/3)

Order Information (Optional):

Touch	: 5 Wires Resistive / 5 Wire Resistive with EMI Coating
Glass	: EMI Coating Glass (Default AR Glass)
OS	: Windows Embedded Standard 7 Windows Embedded 8 Standard Windows Embedded 8.1 Industry Windows 10 IoT Enterprise
Storage	: mSATA SSD up to 256GB
RAM	: SO-DIMM DDR3 1666, max up to 8GB
Power	: Optional isolation 9~36V DC in

Default Accessories


• 1 x MIL-DTL-38999/1 Power cord / Cable
• 1 x MIL-DTL-38999/3 VGA Cable
• 1 x MIL-DTL-38999/3 RS232 Cable
• 1 x Driver & Manual CD




Military Grade 24" Rack Mount Panel PC (Intel® Core i7 Platform)

MODEL #: W24IH3S-MLS1-89

MIL-DTL-38999/3 RS232 Cable

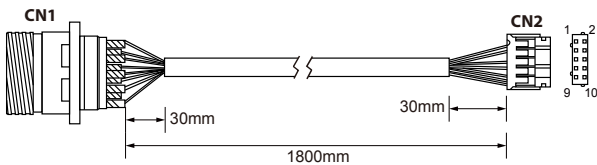


MIL-DTL-38999/3 VGA Cable

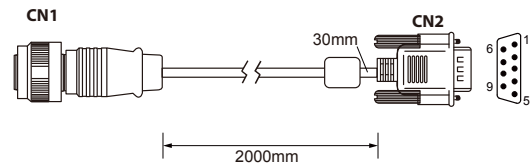


PIN NO.	SYMBOLS	COLOR		PIN NO.	SYMBOLS	COLOR	
CN1-1	R	Red	↔	CN2-4	R	Red	Coaxial cable
CN1-2	R-GND	Black	↔	CN2-9	GND	Black	
CN1-3	G	Green	↔	CN2-6	G	Green	
CN1-4	G-GND	Black	↔	CN2-9	GND	Black	
CN1-5	B	Blue	↔	CN2-8	B	Blue	Coaxial cable
CN1-6	B-GND	Black	↔	CN2-10	GND	Black	
CN1-7	SDA	Yellow	↔	CN2-1	SDA	Yellow	
CN1-8	HS	Orange	↔	CN2-5	HS	Orange	
CN1-9	VS	White	↔	CN2-7	VS	White	
CN1-10	SCL	Brown	↔	CN2-3	SCL	Brown	

PIN NO.	SYMBOLS	COLOR		PIN NO.	SYMBOLS	COLOR	
CN1-1	DCD	Green	↔	CN2-1	DCD	Green	
CN1-2	DSR	Brown	↔	CN2-6	DSR	Brown	
CN1-3	RXD	Red	↔	CN2-2	RXD	Red	
CN1-4	RTS	Orange	↔	CN2-7	RTS	Orange	
CN1-5	TXD	Blue	↔	CN2-3	TXD	Blue	
CN1-6	CTS	White	↔	CN2-8	CTS	White	
CN1-7	DTR	Purple	↔	CN2-4	DTR	Purple	
CN1-8	RI	Yellow	↔	CN2-9	RI	Yellow	
CN1-9	GND	Black	↔	CN2-5	GND	Black	
Braid			↔	Braid			↔
				外殼			↔

MIL-DTL-38999/1 AC Power Cable (For US)

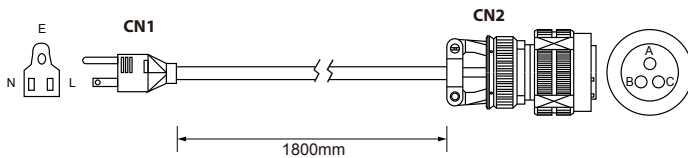

MIL-DTL-38999/1 DC Power cable (optional)

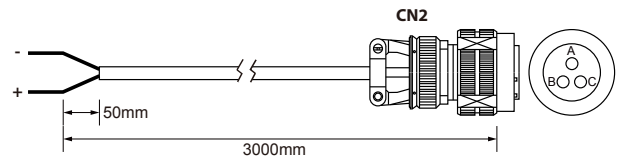

PIN NO.	SYMBOLS	COLOR		PIN NO.	SYMBOLS	COLOR	
CN1-1	N	White	↔	CN2-1	A	White	
CN1-2	L	Black	↔	CN2-2	B	Black	
CN1-3	E	Green	↔	CN2-3	C	Green	

PIN NO.	SYMBOLS	COLO		PIN NO.	SYMBOLS	COLOR	
OPEN	VCC+	White	↔	CN2-A	VCC+	White	
OPEN	VCC-	Black	↔	CN2-B	VCC-	Black	

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660