




PROLITE TF4939UHSC-B1AG

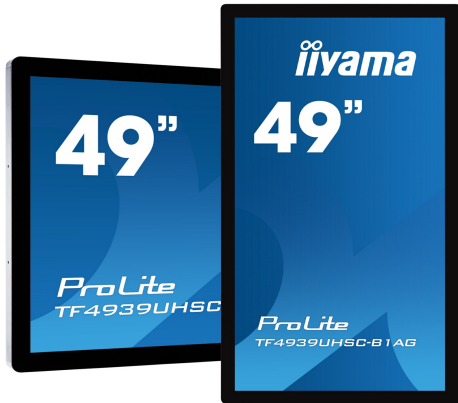

49" Open Frame PCAP interactive large format display with 15pt touch capability, IPS panel technology and touch through glass function for landscape, portrait or face up use

The 4K UHD (3840x2160) Open Frame TF4939UHSC-B1AG with Touch-Through-Glass function guarantees a seamless and accurate touch response for true kiosk integration or interactive behind-glass-retail applications. The IPS panel technology offers exceptional colour performance and wide viewing angles, making it a perfect solution for interactive shop windows, education, kiosks and in-store communications. Featuring a metal housing with 60950-1 ball-drop proof, scratch-resistant and edge-to-edge glass, this display can be installed in the most demanding environments for an 24/7 usage and in different set-ups as a result of its Open Frame side mounting holes. For ease of integration, the TF4939UHSC-B1AG can be equipped with optional external mounting brackets ([OMK4-2](#)) making it an ideal solution for kiosk integrators and interactive multimedia.



IPS Technology

IPS displays are best known for wide viewing angles and natural, highly accurate colours. They are especially suited for colour-critical applications.



Touch through-glass

This through glass touch screen works right through glass and can turn glass surfaces into an interactive touch screen display. Use it on storefront windows, real estate office, in-store for POS or restaurants.

01 DISPLAY CHARACTERISTICS

| | |
|----------------------------------|---|
| Design | Edge to edge glass, Open Frame |
| Diagonal | 49", 123cm |
| Panel | IPS LED, AG coated glass |
| Native resolution | 3840 x 2160 @60Hz (8.3 megapixel 4K UHD) |
| Aspect ratio | 16:9 |
| Panel brightness | 500 cd/m ² |
| Light transmittance | 84% |
| Static contrast | 1100:1 |
| Response time (GTG) | 8ms |
| Viewing zone | horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89° |
| Colour support | 16.7mln 8bit |
| Horizontal Sync | 30 - 83kHz |
| Viewable area W x H | 1076 x 606.5mm, 42.4 x 23.9" |
| Bezel width (sides, top, bottom) | 27mm, 27mm, 27mm |
| Pixel pitch | 0.2796mm |
| Bezel colour and finish | black, matte |

02 TOUCH

| | |
|-----------------------------|---|
| Touch technology | projective capacitive |
| Touch points | 15 (HID, only with supported OS) |
| Touch accuracy | +/- 3mm |
| Touch method | stylus, finger, glove (latex) |
| Touch interface | USB |
| Supported operating systems | All iiyama monitors are Plug & Play and compatible with Windows and Linux. For details regarding the supported OS for the touch models, please refer to the driver instruction file available in the downloads section. |
| Through-Glass | 6mm |
| Palm rejection | yes |

03 INTERFACES / CONNECTORS / CONTROLS

| | |
|-----------------------|---|
| Analog signal input | VGA x1 (max. 1920x1200 @60Hz) |
| Digital signal input | HDMI x2 (v.2.0 x1 max. 3840x2160 @60Hz, v.1.4 x1 max. 3840x2160 @30Hz) DisplayPort x1 (v.1.2 max. 3840x2160 @60Hz) |
| Audio input | Mini jack x1 |
| Monitor control input | RS-232c x1 RJ45 (LAN) x1 |
| Audio output | Mini jack x1 Speakers 2 x 8W |
| HDCP | yes |

04 FEATURES

| | |
|------------------------------|---|
| Extra | handles, touch through-glass, temperature sensor with fan control |
| Max. non-stop operating time | 24/7 |
| Anti image retention | yes |
| Glass thickness | 3mm |

| | |
|---------------------------|--------------|
| Glass hardness | 7H |
| 60950 Ball drop test | yes |
| Water and dust protection | IP54 (front) |
| Housing (bezel) | metal |

05 GENERAL

| | |
|-----------------|--|
| OSD languages | EN, DE, FR, ES, IT, RU, NL, PL |
| Control buttons | power, menu, exit, up, down |
| User controls | picture (backlight, contrast, brightness, sharpness, H/V-position, phase, Chroma, adjust screen, colour temp., picture mode), sound (treble, bass, balance, volume, mute, speaker, audio source), screen (aspect, Touch feature, reset), settings (OSD time, OSD H/V position, language, schedule, power save, control setting, network setting, advanced, information, all reset) |
| Plug&Play | DDC2B |

06 MECHANICAL

| | |
|-----------------------------|-----------------------------------|
| Orientation | landscape, portrait, face-up |
| VESA mounting | 400 x 200mm |
| Mini PC mount | VESA 100 x 100, NUC INTEL |
| Operation temperature range | 0°C - 40°C |
| Storage temperature range | - 20°C - 60°C |
| MTBF | 50000 hours (excluding backlight) |

07 ACCESSORIES INCLUDED

| | |
|-------------|---------------------------------|
| Cables | power, USB, HDMI, DP |
| Guides | quick start guide, safety guide |
| Cable cover | yes |

08 POWER MANAGEMENT


| | |
|-------------------|--|
| Power supply unit | internal |
| Power supply | AC 100 - 240V, 50/60Hz |
| Power usage | 135W typical, 1.5W stand by, 0.3W off mode |

09 SUSTAINABILITY

| | |
|---|--|
| Regulations | CE, EAC, RoHS support, ErP, WEEE, cULus, REACH, UKCA |
| Energy efficiency class (Regulation (EU) 2017/1369) | G |
| REACH SVHC | above 0.1%: Lead |

10 DIMENSIONS / WEIGHT

| | |
|------------------------------|-----------------------|
| Product dimensions W x H x D | 1130 x 660.5 x 72.5mm |
| Box dimensions W x H x D | 1280 x 835 x 245mm |
| Weight (without box) | 31kg |
| Weight (with box) | 36.7kg |
| EAN code | 4948570118052 |

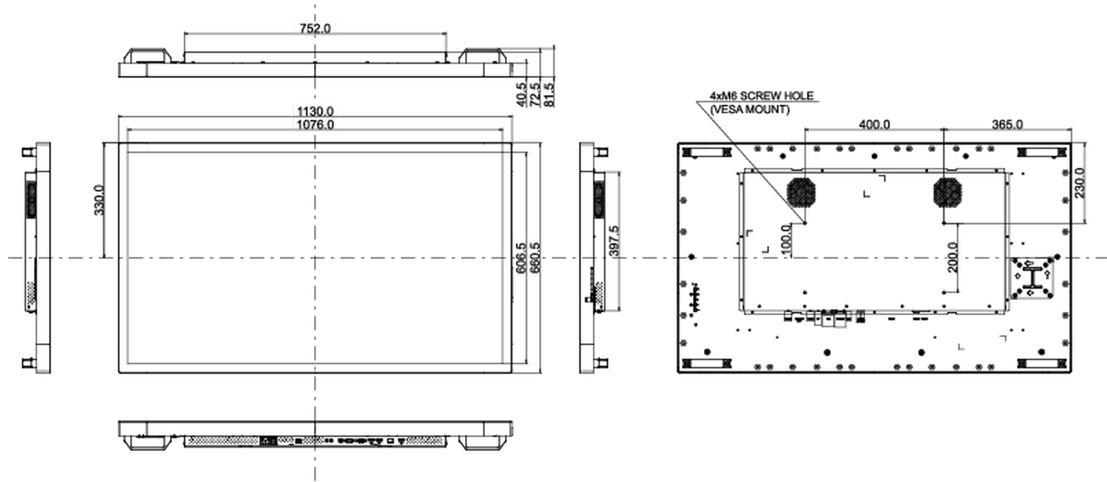

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION. ALL RIGHTS RESERVED

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660