



DW SERIES

DW551DR4

55" Dual Side Digital Signage




3000 / 1000NITS
DUAL SIDED DESIGN



PORTRAIT &
LANDSCAPE



CEILING
SUSPENDED



FLOOR
MOUNTED



TRUECOLOR™
CALIBRATED

FOR MORE INFORMATION

For more information about DynaScan, visit our website at www.dynascandisplay.com. Copyright © DynaScan Technology Inc. All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.

DynaScan


65501 | V1.04

SPECIFICATION


MODEL	DW551DR4	
PANEL	LCD Panel Type	54.64 inches LCD (x2)
	Native Resolution	1920 x 1080
	Backlight	LED
	Default Color Temperature	D65 (6500 K)
	Brightness	1000 nits/ 3000 nits
	Color Depth	8 bits
	Contrast Ratio	3000:1
	Response Time (Typ.)	9 ms
	Viewing Angle (H/V)	178° / 178°
	Light Life Time (Typ.)	100,000 hrs
POWER	Power Supply	Internal
	Rated Voltage	100-240V ~ 50/60Hz
	Power On Mode (Typ./ Max)	240 W / 380 W
MECHANICAL SPECS	Power Saving Mode	< 1W
	Bezel Width (T/B/L/R)	Even bezel 29.5 mm
	Cabinet Color	Black
	Monitor Dimension (LxHxD, w/o stand)	1272.8 x 743.3 x 62.7 mm
	Monitor Weight	40 kg
	Orientation	Portrait/ Landscape
	Carring Handles	Yes
	Language	English
	Support SNMP (Up to V3.0)	Yes
	Dimming Control	Yes
USER INTERFACE	Proof of Image Retention	Yes
	Auto Orientation Sensor	Yes
	Ambient Light Sensor	Yes
	Power On/Off Scheduling	Yes
	Internal Temperature Sensor	Yes
INPUT	OSD Menu Rotation	Yes
	HDMI 1.4b (HDCP 1.4)	x2 (1080p)
	Display Port 1.2	x2
	DVI-D	x2
	Micro SD Slot	x2 (For Internal Player)
OUTPUT	USB 2.0	x2 (For Internal Player)
	Audio	x2
EXTERNAL CONTROL	RS-232	In x2
	RJ-45	x2 (LAN)
INTERNAL PLAYER	Operating System	Android 7.1.2
	Processor	ARM Quad-Core Cortex-A7
	Clock Speed	1.2 GHz
	Main Memory Interface	DDR3L-1066, 1GB
	Graphics	Mali-400MP2 GPU, Support OpenGL ES1/2.0
	Storage	Internal: Nand flash 8GB(multi sources) External: Support Micro SD, Up to 32GB
	Multimedia	VP8/H265/H264 video decoders, up to 60fps 1080P other video decoders (VC-1, MPEG-1/2/4, VP8)
	Wi-Fi Specification	802.11 b/g/n 2412.0MHz - 2462.0MHz
	Operating Temperature	0° C ~ 45° C
	ENVIRONMENT	Storage Temperature
Humidity		10% ~ 80% RH Non-condensing
CERTIFICATION	CE / FCC / RoHS	

DIMENSIONS

Unit: mm [inch]

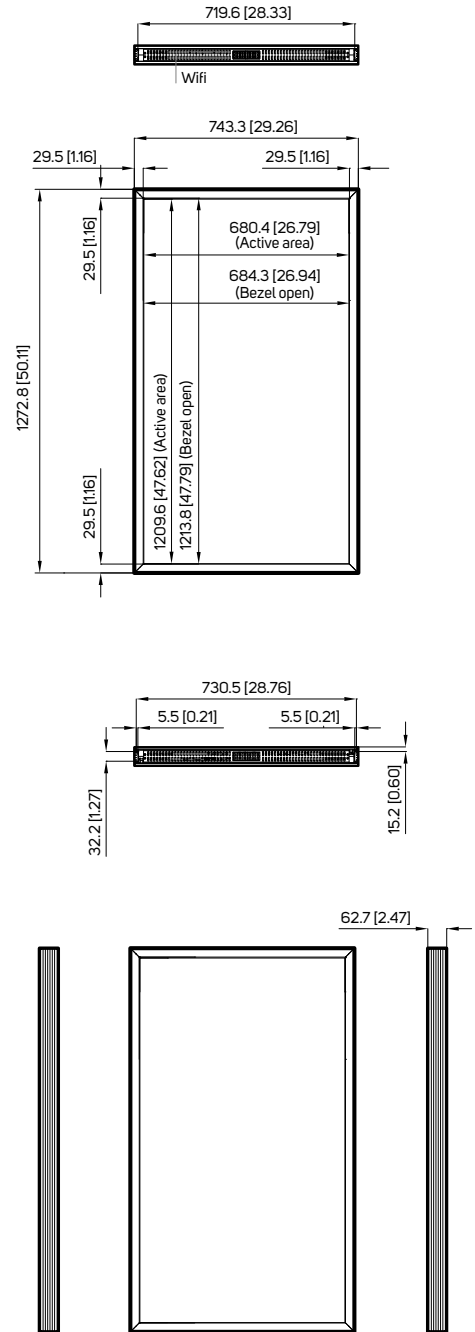

INTERFACE

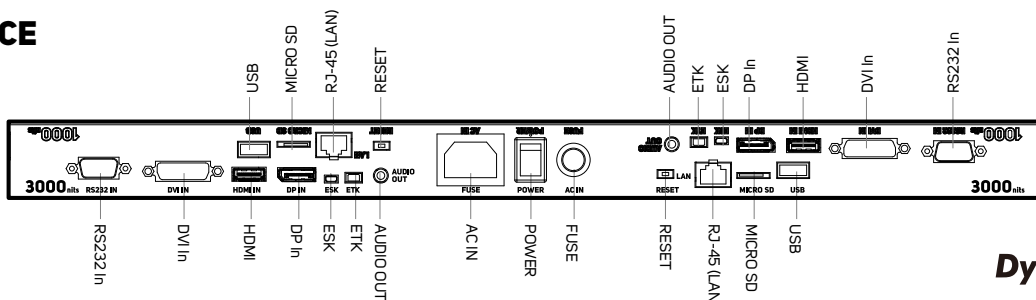

DynaScan

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660