

# SFP-WB80 1.25 Gigabit Ethernet-Single Mode Transceiver

#### SFP BIDI, Single LC Connector, 1510nm DFB LD for Single Mode Fiber, RoHS Compliant



### **Applications**

- Gigabit Ethernet Links
- Fibre Channel Links at 1.06 Gbps
- High Speed Backplane Interconnects
- Switched Backbones

#### Features



- 1510nm DFB LD
- Multi Data Rate: from 125M to 1.25Gbps, NRZ
- Single +3.3V Power Supply
- RoHS Compliant and Lead-free
- AC/AC Differential Electrical Interface
- Compliant with Multi-Source Agreement (MSA) Small Form Factor Pluggable (SFP)
- Single LC Connector
- Compliance with specifications for IEEE-802.3z Gigabit Ethernet at 1.25 Gbps
- Compliance with ANSI specifications for Fibre Channel applications at 1.06 Gbps
- Eye Safety
   Designed to meet Laser Class 1 comply with EN60825-1

#### Description

The SFP-WB80 from AAXEON is the high performance and cost-effective module for serial optical data communication applications specified for single mode of multi-rate from 125M to 1.25 Gb/s. It operates with +3.3V power supply. The module is intended for single mode fiber, operates at a nominal wavelength of Tx: 1510nm / Rx: 1590nm and complies with Multi-Source Agreement (MSA) Small Form Factor Pluggable (SFP). Each module consists of a bi-directional optical subassembly that combines a transmitter with a receiver and an electrical subassembly. All of them are housed in a metal package and the combination produces a reliable component.

The module is a single fiber connector transceiver designed for use in Gigabit Ethernet applications and to provide IEEE-802.3z compliant link for 1.25Gb/s long reach applications. The characteristics are performed in accordance with Telcordia Specification GR-468-CORE.

#### **EMC**

Most equipment utilizing high-speed transceivers will be required to meet the following requirements:

- 1) FCC in the United States
- 2) CENELEC EN55022 (CISPR 22) in Europe

To assist the customer in managing the overall equipment EMC performance, the transceivers have been designed to satisfy FCC class B limits and provide good immunity to radio-frequency electromagnetic fields.

#### Eve Safety

The transceivers have been designed to meet Class 1 eye safety and comply with EN 60825-1.



Page 1 of 6



## **a**ntaira<sup>™</sup>

## SFP-WB80 1.25 Gigabit Ethernet-Single Mode Transceiver

#### **Product Information**

Model Number	Operating Voltage & SD Output	Distance	Wavelength	Output Power	Sensitivity
SFP-WB80	3.3V TTL AC/AC	80 km	1510 nm DFB / 1590 nm	-2 ~ +3 dBm	<i>≦-26 dBm</i>

#### **ABSOLUTE MAX RATINGS**

PARAMETER	SYMBOL	MIN	MAX	UNIT	NOTE
Storage Temperature	Ts	-40	85	°C	
Supply Voltage	$V_{CC}$	0	6	V	
Data Input Voltage		0	Vcc	V	
Supply Current	$I_S$		300	mA	

#### **OPERATING CONDITIONS**

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	NOTE
Case Operating Temperature	$T_A$	0		70	°C	
Supply Voltage	$V_{CC}$	3.1		3.5	V	
Data Input Voltage Swing	$V_{ID}$	300		1860	mV	

#### **ELECTRICAL CHARACTERISTICS**

PARAMETER	SYMBOL	MIN	MAX	UNIT	NOTE
Transmitter					
Transmitter Supply Current	I <sub>CCT</sub>		200	mA	
Tx_ Disable Input Voltage - Low	$V_{IL}$	0	0.8	V	
Tx_ Disable Input Voltage - High	$V_{IH}$	2.0	Vcc	V	
Tx_ Fault Output Voltage - Low	$V_{OL}$	0	0.8	V	
Tx_ Fault Output Voltage - High	$V_{OH}$	2.0	Vcc	V	
Receiver					
Receiver Supply Current	I <sub>CCR</sub>		100	mA	
Receiver Data Output Differential Voltage	$V_{OD}$	0.4	1.3	V	
Rx_LOS Output Voltage - Low	$V_{OL}$	0	0.8	V	
Rx_LOS Output Voltage - High	$V_{OH}$	2.0	Vcc	V	
MOD_DEF (1), MOD_DEF (2) - Low	$V_{IL}$	-0.6	Vcc × 0.3	V	
MOD_DEF (1), MOD_DEF (2) - High	$V_{IH}$	Vcc × 0.7	Vcc + 0.5	V	

#### TRANSMITTER ELECTRO-OPTICAL CHARACTERISTICS

PARAMETER	SYMBOL	MIN	TYP.	MAX	UNIT	NOTE
Optical Output Power	Po	-2		3	dBm	1
Extinction Ratio	ER	9			dB	
Center Wavelength	$\lambda_{\mathrm{c}}$	1480	1510	1520	nm	
Spectral Width (-20dB)	Δλ			1	nm	
Side Mode Suppression Ratio	SMSR	30			dB	
RIN	RIN			-120	dB/Hz	
Optical Rise time (20%-80%)	t <sub>r</sub>			260	ps	2
Optical Fall time (20%-80%)	t <sub>f</sub>			260	ps	2
Output Eye		Comp	oliant with IEE	E802.3z/D5	.0	





## **antaira**"

## SFP-WB80 1.25 Gigabit Ethernet-Single Mode Transceiver

#### RECEIVER ELECTRO-OPTICAL CHARACTERISTICS

PARAMETE	R	SYMBOL	MIN	TYP.	MAX	UNIT	NOTE
Maximum Input Optical Power		$P_{max}$	-3			dBm	3
Minimum Input Optical Power	1.25Gb/s				-26		3
	1.06Gb/s				-26	=	3
	622Mb/s	$P_{min}$			-26	dBm	4
	155Mb/s				-26	_	4
	125Mb/s				-26	_	3
Operating Wavelength		λ	1580		1620	nm	
Optical Return Loss		ORL	14			dB	
Receiver Electrical 3dB Upper Frequency	Cutoff				1500	MHz	
LOS of Signal - Asserted		P <sub>A</sub>	-40			dBm	
LOS of Signal - Deasserted		P <sub>D</sub>			-25	dBm	
Loss of Signal -Hysterisis		P <sub>D</sub> -P <sub>A</sub>	0.5			dB	

#### Notes:

- 1. Measured average power coupled into 9/125 $\mu$ m single mode fiber.
- 2. These are 20-80% values.
- 3.Measured with  $2^7$ -1 PRBS at BER<10<sup>-12</sup>
- 4. Measured with 2<sup>23</sup>-1 PRBS at BER<10<sup>-10</sup>


#### **TIMING CHARACTERISTICS**

PARAMETER	SYMBOL	MIN	TYP.	MAX	UNIT	NOTE
TX_DISABLE Assert Time	t_off			10	μs	
TX_DISABLE Negate Time	t_on			1	ms	
Time to initialize, include reset of TX_FAULT	t_init			300	ms	-
TX_FAULT from fault to assertion	t_fault			100	μs	
TX_DISABLE time to start reset	t_reset	10			μs	
Receiver Loss of Signal Assert Time (off to on)	$t_{A,RX\_LOS}$			100	μs	
Receiver Loss of Signal Assert Time (on to off)	t <sub>D,RX_LOS</sub>			100	μs	



# SFP-WB80 1.25 Gigabit Ethernet-Single Mode Transceiver


#### **BLOCK DIAGRAM OF TRANSCEIVER**

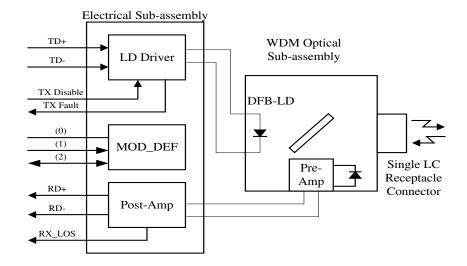




# SFP-WB80 1.25 Gigabit Ethernet-Single Mode Transceiver

#### PIN OUT DIAGRAM OF TRANSCEIVER





Top of Board

Buttom of Board (As Viewed through Top of Board

#### PIN OUT TABLE

Pin	Symbol	Functional Description
1	VeeT	Transmitter Ground
2	TX Fault	Transmitter Fault Indication
3	TX Disable	Transmitter Disable – Module disables on high or open
4	MOD-DEF(2)	Module Definition 2 – Two wire serial ID interface
5	MOD-DEF(1)	Module Definition 1 – Two wire serial ID interface
6	MOD-DEF(0)	Module Definition 0 – Grounded in module
7	Rate Select	Not Connected
8	LOS	Loss of Signal
9	VeeR	Receiver Ground
10	VeeR	Receiver Ground
11	VeeR	Receiver Ground
12	RD-	Inverse Received Data Out
13	RD+	Received Data Out
14	VeeR	Receiver Ground
15	VccR	Receiver Power
16	VccT	Transmitter Power
17	VeeT	Transmitter Ground
18	TD+	Transmitter Data In
19	TD-	Inverse Transmitter Data In
20	VeeT	Transmitter Ground






## **antaira**<sup>™</sup>


## SFP-WB80 1.25 Gigabit Ethernet-Single Mode Transceiver

#### RECOMMENDED CIRCUIT SCHEMATIC

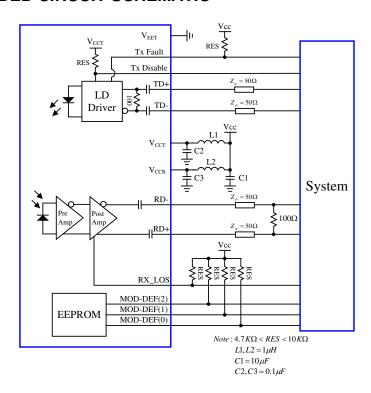

#### **MECHANICAL DIMENSIONS**

Units in mm

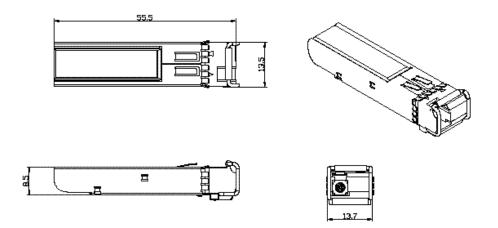

All dimensions are ±0.2mm unless otherwise specified.





## **Assured Systems**

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

sales@assured-systems.com

Sales: +1 347 719 4508 Support: +1 347 719 4508

1309 Coffeen Ave Ste 1200 Sheridan WY 82801 USA

### **EMEA**

sales@assured-systems.com

Sales: +44 (0)1785 879 050 Support: +44 (0)1785 879 050

Unit A5 Douglas Park Stone Business Park Stone ST15 0YJ United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660