

# SFP-WB-M 1.25 Gigabit Ethernet-Multi Mode Transceiver

SFP BIDI, Single LC Connector, 1550nm FP LD for Multi Mode Fiber, RoHS Compliant



### Applications

- Gigabit Ethernet Links
- Fiber Channel Links at 1.06 Gbps
- High Speed Backplane Interconnects

### Features



- 1550nm FP LD
- Multi Data Rate: from 125M to 1.25Gbps, NRZ
- Single +3.3V Power Supply
- RoHS Compliant and Lead-free
- AC/AC Differential Electrical Interface
- Compliant with Multi-Source Agreement (MSA) Small Form Factor Pluggable (SFP)
- Single LC Connector
- Compliance with specifications for IEEE-802.3z Gigabit Ethernet at 1.25 Gbps
- Compliance with ANSI specifications for Fibre Channel applications at 1.06 Gbps
- Eye Safety Designed to meet Laser Class 1 comply with EN60825-1

### Description

The SFP-WB-M from AAXEON is the high performance and cost-effective module for serial optical data communication applications specified for multimode of multi-rate from 125M to 1.25 Gb/s. It operates with +3.3V power supply. The module is intended for multimode fiber, operates at a nominal wavelength of Tx: 1550nm / Rx: 1310nm and complies with Multi-Source Agreement (MSA) Small Form Factor Pluggable (SFP). Each module consists of a transmitter optical subassembly, a receiver optical subassembly and an electrical subassembly. All of them are housed in a metal package and the combination produces a reliable component.

The module is a multimode fiber connector transceiver designed for use in Gigabit Ethernet applications and to provide IEEE-802.3z compliant link for 1.25Gb/s intermediate reach applications. The characteristics are performed in accordance with Telcordia Specification GR-468-CORE.

### ЕМС

Most equipment utilizing high-speed transceivers will be required to meet the following requirements:

- 1) FCC in the United States
- 2) CENELEC EN55022 (CISPR 22) in Europe

To assist the customer in managing the overall equipment EMC performance, the transceivers have been designed to satisfy FCC class B limits and provide good immunity to radio-frequency electromagnetic fields.

### Eye Safety

The transceivers have been designed to meet Class 1 eye safety and comply with EN 60825-1.





## **e**ntaira<sup>®</sup>

## SFP-WB-M 1.25 Gigabit Ethernet-Multi Mode Transceiver

### **Product Information**

Operating Model Number Voltage & SD Output		Wavelength	Output Power	Sensitivity	Distance
SFP-WB-M	3.3V TTL AC/AC	1550 nm FP / 1310 nm	-10 ~ -4 dBm	≤-17 dBm	550 m(50/125μm) 275 m(62.5/125μm)

#### **ABSOLUTE MAX RATINGS**

PARAMETER	SYMBOL	MIN	MAX	UNIT	NOTE
Storage Temperature	Ts	-40	85	°C	
Supply Voltage	V <sub>CC</sub>	0	6	V	
Data Input Voltage		0	Vcc	V	
Supply Current	I <sub>S</sub>		300	mA	

#### **OPERATING CONDITIONS**

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	NOTE
Case Operating Temperature	T <sub>A</sub>	0		70	°C	
Supply Voltage	V <sub>CC</sub>	3.1		3.5	V	
Data Input Voltage Swing	V <sub>ID</sub>	300		1860	mV	

#### ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	MIN	MAX	UNIT	NOTE
Transmitter					
Transmitter Supply Current	I <sub>CCT</sub>		200	mA	
Tx_Disable Input Voltage - Low	VIL	0	0.8	V	
Tx_Disable Input Voltage - High	VIH	2.0	Vcc	V	
Tx_Fault Output Voltage - Low	V <sub>OL</sub>	0	0.8	V	
Tx_Fault Output Voltage - High	V <sub>OH</sub>	2.0	Vcc	V	
Receiver					
Receiver Supply Current	I <sub>CCR</sub>		100	mA	
Receiver Data Output Differential Voltage	V <sub>OD</sub>	0.4	1.3	V	
Rx_LOS Output Voltage - Low	V <sub>OL</sub>	0	0.8	V	
Rx_LOS Output Voltage - High	V <sub>OH</sub>	2.0	Vcc	V	
MOD_DEF (1), MOD_DEF (2) - Low	V <sub>IL</sub>	-0.6	Vcc × 0.3	V	
MOD_DEF (1), MOD_DEF (2) - High	VIH	Vcc × 0.7	Vcc + 0.5	V	

### TRANSMITTER ELECTRO-OPTICAL CHARACTERISTICS

PARAMETER	SYMBOL	MIN	TYP.	MAX	UNIT	NOTE
Optical Output Power	Po	-10		-4	dBm	1
Extinction Ratio	ER	9			dB	
Center Wavelength	$\lambda_{c}$	1480	1550	1576	nm	
Spectral Width (RMS)	Δλ			2.5	nm	
RIN	RIN			-120	dB/Hz	
Optical Rise time (20%-80%)	t <sub>r</sub>			260	ps	2
Optical Fall time (20%-80%)	t <sub>f</sub>			260	ps	2
Output Eye		Com	oliant with IEE	E802.3z/D5	.0	



Page 2 of 6



## **⊡**ntaira<sup>™</sup>

## SFP-WB-M 1.25 Gigabit Ethernet-Multi Mode Transceiver

RECEIVER ELECTI	RO-OPTIC	AL CHARA	CTERIST	ICS			
PARAMETER		SYMBOL	MIN	TYP.	MAX	UNIT	NOTE
Maximum Input Optical I	Power	P <sub>max</sub>	-3			dBm	3
	1.25Gb/s				-17		3
Minimum Input Optical Power	1.06Gb/s				-17	-	3
	622Mb/s	P <sub>min</sub>			-17	dBm	4
	155Mb/s				-17		4
	125Mb/s				-17	-	3
Operating Wavelength		λ	1260		1360	nm	
Optical Return Loss		ORL	14			dB	
Receiver Electrical 3dB Upper Cutoff Frequency					1500	MHz	
LOS of Signal - Asserted		P <sub>A</sub>	-35			dBm	
LOS of Signal - Deasserted		PD			-17	dBm	
Loss of Signal -Hysterisis		P <sub>D</sub> -P <sub>A</sub>	0.5			dB	

#### Notes:

1. Measured average power coupled into 62.5/125µm multimode fiber.

2. These are 20-80% values.

3.Measured with 2<sup>7</sup>-1 PRBS at BER<10<sup>-12</sup> 4.Measured with 2<sup>23</sup>-1 PRBS at BER<10<sup>-10</sup>

#### **TIMING CHARACTERISTICS**

PARAMETER	SYMBOL	MIN	TYP.	MAX	UNIT	NOTE
TX_DISABLE Assert Time	t_off			10	μs	
TX_DISABLE Negate Time	t_on			1	ms	
Time to initialize, include reset of TX_FAULT	t_init			300	ms	
TX_FAULT from fault to assertion	t_fault			100	μs	
TX_DISABLE time to start reset	t_reset	10			μs	
Receiver Loss of Signal Assert Time (off to on)	t <sub>A,RX_LOS</sub>			100	μs	
Receiver Loss of Signal Assert Time (on to off)	t <sub>D,RX_LOS</sub>			100	μs	






## **entaira**<sup>®</sup>

## SFP-WB-M 1.25 Gigabit Ethernet-Multi Mode Transceiver

### **BLOCK DIAGRAM OF TRANSCEIVER**

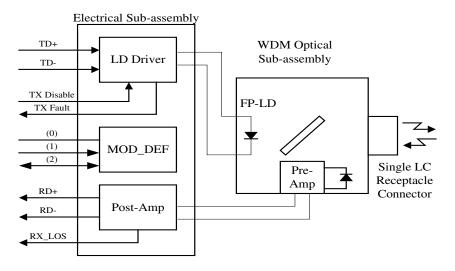







## **©**ntaira<sup>™</sup>

## SFP-WB-M 1.25 Gigabit Ethernet-Multi Mode Transceiver

### PIN OUT DIAGRAM OF TRANSCEIVER



Top of Board




Buttom of Board (As Viewed through Top of Board

### PIN OUT TABLE

	IADLL	
Pin	Symbol	Functional Description
1	VeeT	Transmitter Ground
2	TX Fault	Transmitter Fault Indication
3	TX Disable	Transmitter Disable – Module disables on high or open
4	MOD-DEF(2)	Module Definition 2 – Two wire serial ID interface
5	MOD-DEF(1)	Module Definition 1 – Two wire serial ID interface
6	MOD-DEF(0)	Module Definition 0 – Grounded in module
7	Rate Select	Not Connected
8	LOS	Loss of Signal
9	VeeR	Receiver Ground
10	VeeR	Receiver Ground
11	VeeR	Receiver Ground
12	RD-	Inverse Received Data Out
13	RD+	Received Data Out
14	VeeR	Receiver Ground
15	VccR	Receiver Power
16	VccT	Transmitter Power
17	VeeT	Transmitter Ground
18	TD+	Transmitter Data In
19	TD-	Inverse Transmitter Data In
20	VeeT	Transmitter Ground

antaira






## **ontaira**"


## SFP-WB-M 1.25 Gigabit Ethernet-Multi Mode Transceiver

### RECOMMENDED CIRCUIT SCHEMATIC

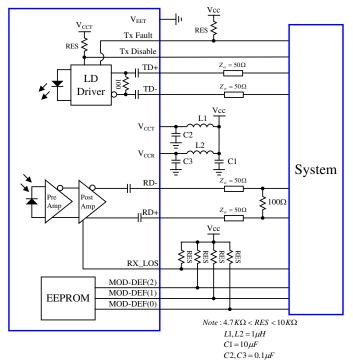

## MECHANICAL DIMENSIONS

Units in mm

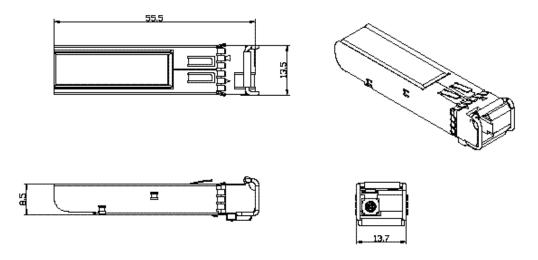

All dimensions are ±0.2mm unless otherwise specified.





## **Assured Systems**

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

sales@assured-systems.com

Sales: +1 347 719 4508 Support: +1 347 719 4508

1309 Coffeen Ave Ste 1200 Sheridan WY 82801 USA

### **EMEA**

sales@assured-systems.com

Sales: +44 (0)1785 879 050 Support: +44 (0)1785 879 050

Unit A5 Douglas Park Stone Business Park Stone ST15 0YJ United Kingdom

VAT Number: 120 9546 28 Business Registration Number: 07699660