
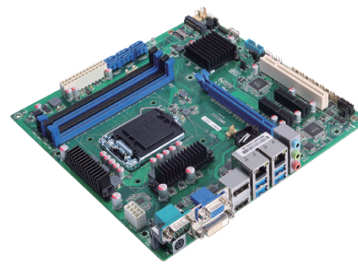


MMB501

Micro ATX Motherboard with LGA1151 Socket 7th/6th Gen Intel® Core™ Processor, Intel® Q170, USB 3.0, SATA 3.0, Dual LAN, VGA, DisplayPort, DVI-D, and HDMI

Features

- LGA1151 socket 7th/6th gen Intel® Core™ i7/i5/i3, Pentium® & Celeron® processor (Kaby Lake/Skylake)
- Four 288-pin DDR4-2133/2400 DIMM for up to 64GB of memory
- DisplayPort, VGA, DVI-D and HDMI with triple-view supported
- 6 SATA-600 with RAID 0/1/5/10
- 6 USB 3.0 and 5 USB 2.0

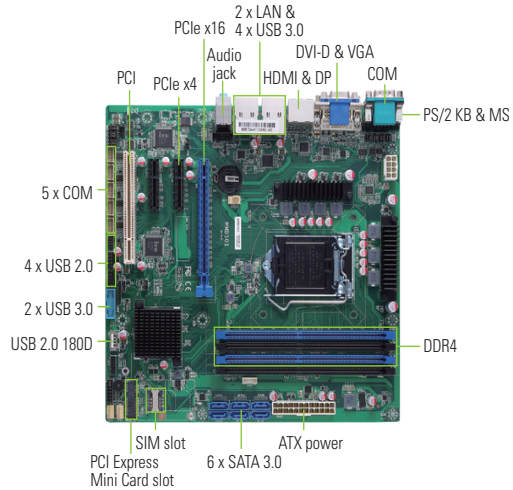

Core System

CPU	LGA1151 socket 7th/6th gen Intel® Core™ i7/i5/i3, Pentium® & Celeron® processor
System Memory	4 x 288-pin DDR4-2133/2400 DIMM, up to 64GB
Chipset	Intel® Q170
BIOS	AMI BIOS
SSD	N/A
Watchdog Timer	255 levels, 1 to 255 sec.
Expansion Interface	1 x PCIe x16 slot 2 x PCIe x4 slot 1 x PCI slot 1 x Full-size PCI Express Mini Card with SIM slot
Battery	Lithium 3 V/ 220 mAh
Dimensions	244 x 244 mm
Board Thickness	1.6 mm
Operating Temperature	0°C to +60°C (+32°F to +140°F)
Humidity	10% to 95% relative humidity, non-condensing

I/O

SATA	6 x SATA-600 with RAID 0/1/5/10
Hardware Monitoring	Detect CPU/system temperature, voltage and supports Smart fan control
Ethernet	1 x 10/100/1000 Mbps Ethernet with Intel® i219LM; supports Wake-on-LAN, PXE Boot ROM, iAMT 1 x 10/100/1000 Mbps Ethernet with Intel® i211-AT; supports Wake-on-LAN, PXE Boot ROM
Audio	HD Codec audio as MIC-in/Line-in/Line-out with Realtek ALC662
USB	6 x USB 3.0 (4 ports on rear I/O; 2 internal box headers) 5 x USB 2.0 (4 ports form internal pin header; 1 USB 180D Type A)
Serial	4 x RS-232 (Internal 2.0 pitch wafer) 1 x RS-232/422/485 (rear I/O) 1 x RS-232/422/485 (Internal 2.0 pitch wafer)
PS/2 Combo Port	1 x PS/2 keyboard and mouse
TPM	TPM 2.0 (optional)
SMBus	Yes
Digital I/O	8-channel programmable

Display

Graphic	Intel® HD Graphic
Memory Size	Share system memory
Display Interface	1 x VGA 1 x DVI-D 1 x HDMI 1 x DisplayPort

Ordering Information

Standard	
MMB501 (P/N: E38W501101)	Micro ATX motherboard with LGA1151 socket 7th/6th gen Intel® Core™ i7/i5/i3, Pentium® & Celeron® processor, Intel® Q170, USB 3.0, SATA 3.0, 2 GbE LAN, VGA, DisplayPort, DVI-D, and HDMI
Optional	
5938A808010E	2 x USB 2.0 cable with bracket, P=2.54 mm, L=190 mm
5938A808020E	2 x USB 2.0 cable with bracket, P=2.54 mm, L=400 mm
5948C122800E	2 x USB 3.1 Gen1 cable with bracket, L=400 mm
59380000290E	PS/2 keyboard & mouse cable with bracket
593826A0000E	SATA signal cable/red, L=500 mm
59384500100E	Audio cable with bracket, P=2.0 mm, L=450 mm
594M5002100E	2 x COM port with bracket, P=2.0 mm, L=300 mm
83935151000E	TPM 2.0 module (AX93515)

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660