


IPC962-512-FL

2-slot Fanless Industrial System with LGA1151 Socket 7th/6th Gen Intel® Core™ i7/i5/i3 or Celeron® Processor, Intel® Q170, Front-access I/O, and PCIe & PCI Slots

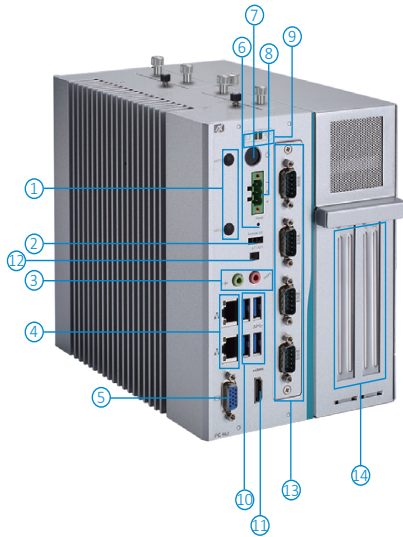

- | | |
|---------------------------------|---------------------------------|
| 1. 2 x Antenna opening | 13. Extension system I/O module |
| 2. Remote switch | (1) AX93511 |
| 3. Mic-in & Line-out | (2) AX93512 |
| 4. 2 x LAN | (3) AX93516 |
| 5. VGA | (4) AX93519 |
| 6. Reset switch | (5) Blank I/O cover |
| 7. Power on/off button with LED | 14. Expansion interface |
| 8. Terminal block | (1) AX96205 |
| 9. HDD & power LEDs | (2) AX96206 |
| 10. 4 x USB 3.0 | (3) AX96207 |
| 11. HDMI | |
| 12. AT/ATX quick switch | |

Features

- LGA1151 socket 7th/6th gen Intel® Core™ i7/i5/i3 or Celeron® processor, up to 65W (Kaby Lake/Skylake)*
- Intel® Q170 chipset
- Supports 2 expansion slots
- Power input: 24 VDC (uMin=19V/uMax=30V)
- Compact & front I/O design
- -10°C to +60°C operating temperature range
- Supports ECM BIOS setting
- Supports 2 swappable 2.5" HDD & RAID 0,1
- Supports WLAN module & antenna (optional)
- Supports TPM 2.0



▲ Rear view

Specifications

Standard Color	Silver
Construction	Aluminum extrusion heavy-duty cold-rolled steel
Processor	CPU Level 7th/6th gen Intel® Core™ i7/i5/i3 or Celeron® processor, up to 65W (Kaby Lake/Skylake)*
System	Chipset Intel® Q170
System Memory	2 x DDR4-2133/2400 un-buffered SO-DIMM, up to 32GB
System I/O	1 x Power on/off button with LED (ATX) 1 x Remote switch 1 x Reset switch 1 x 3-pin terminal block 1 x AT/ATX selectable switch 2 x 10/100/1000 Mbps Ethernet (Intel® I210-AT) 4 x USB 3.0 1 x HDMI 1 x VGA 1 x Audio (Mic-in/Line-out)
TPM	TPM 2.0

Specifications

Expansion Interface	AX96205: 1 PCIe x16 + 1 PCIe x4 AX96206: 1 PCIe x16 + 1 PCI AX96207: 2 PCI (support by project) 1 x Full-size PCI Express Mini Card slot with SIM slot (USB & PCIe interface)
Storage	2 x 2.5" swappable HDD (15 mm height)
System Indicators	1 x Power LED 1 x HDD LED
Power Input	Type: ATX/AT Input: 24 VDC (uMin=19V/uMax=30V)
Operating Temperature	-10°C to +60°C (+14°F to +140°F) with 6th gen Intel® Core™ up to 35W and W.T. HDD/SSD* -10°C to +50°C (+14°F to +122°F) with 6th/7th gen Intel® Core™ up to 65W and W.T. HDD/SSD*
Storage Temperature	-20°C to +80°C (-4°F to +176°F)
Humidity	10% to 90%, non-condensing
Dimensions	147.5 mm (5.80") (W) x 192 mm (7.54") (H) x 230 mm (9.04") (D)
Weight (net/gross)	4.382 kg (9.66 lb)/5.346 kg (11.80 lb)
Certifications	CE, FCC

* Please refer to the user manual for the list of CPU support.

Ordering Information

System

IPC962-512-DC-FL (P/N: E26G962101)	2-slot fanless industrial system with 7th/6th gen Intel® Core™ i7/i5/i3 processor and Intel® Q170, front-access I/O
---------------------------------------	---------------------------------------------------------------------------------------------------------------------

Extension System I/O Module & Expansion Interface

AX93511 (P/N: E29R127122)	4 x RS-232/422/485 I/O module (default RS-232)
AX93512 (P/N: E29R127123)	2 x RS-232/422/485 with isolated 1.5kVDC & 8-in/8-out with isolated 1.5kVDC DIO module (support by project)
AX93516 (P/N: E29R127124)	4 x RS-232/422/485 with isolated 2kVDC module (support by project)
AX93519 (P/N: E29R127125)	1 x 10/100/1000 Mbps (Intel® I210-AT) Ethernet, 2 x RS-232/422/485 and 2 x USB 3.0 module
726G9620610E	Blank I/O cover
AX96205 (P/N: 83962051000E)	1 x PCIe x16 + 1 x PCIe x4 expansion kit
AX96206 (P/N: 83962061000E)	1 x PCIe x16 + 1 x PCI expansion kit
AX96207 (P/N: 83962071000E)	2 x PCI expansion kit (support by project)

Optional Accessory

2.5" SATA HDD/SSD	
DDR4-2133/2400 un-buffered SO-DIMM, up to 32GB	
E29R127127	IPC962-512-FL fan module kit
E29R127129	Wall mount bracket kit
509000001500	Adaptor 24V/120W, wire only
50906A24000E	Adapter 24V/230W, wire only

Power Protection


DC Version

OVP (over voltage protection)
OCP (over current protection)
Reverse Protection

Packing List

1 x IPC962-512-FL unit
1 x Screw pack
4 x Foot pad
1 x CPU grease
1 x Terminal block
1 x Remote power switch cable
1 x Holder bracket

Dimensions

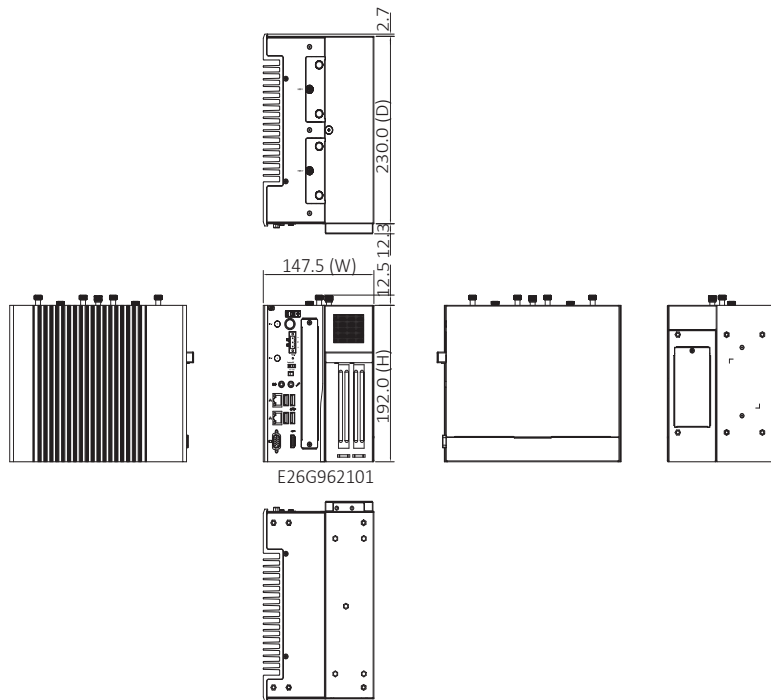

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660