

ViPAC-817P/R/G(H)

17" Intel Celeron N2930 Fanless Expandable Panel PC

Industrial Panel PC

HMI Controller

Industrial Display Monitor

Box PC




Features

- 17" TFT LCD Panel PC
- Intel Celeron N2930 Processor
- Modular Concept and Fanless Design
- Support PCT/RTW/AR Glass
- Front Bezel IP66
- Option WiFi/BT/Speaker
- Support 2 x Expansion slot
- DC 9~36V Power input, option AC power input

Specifications

System		
CPU	Onboard Intel Celeron N2930 Processor (2M Cache, 1.83GHz)	
System Chipset	SoC	
Memory	2 x 204-pin DDR3L SO-DIMM slot up to 8GB	
IO Port		
Rear side I/O port	4 x USB 3.0 type A 2 x RJ45 GbE LAN 1 x DB9 RS-232/422/485 default RS-232 1 x DB9 RS-232 1 x DB9 RS-422/485 default RS-485 1 x DB15 VGA 1 x HDMI with Cover 1 x Line-out/Mic-in 1 x 2 pin Terminal block for external power switch 2 x LED indication for HDD/System 1 x System LED indication at front 1 x 3 pin TB Power connector 1 x Power Switch on/off	
Option I/O	2 x 2W speaker at rear side 4 x USB 2.0 Type A via TB-546 2 x DB9 COM port 1 x 8-bit GPIO (3 in/out/VCC/GND)	
Storage Space		
HDD	1 x 2.5" SATA HDD Space (Easy Accessible Storage Design)	
Expansion		
Expansion Slot	1 x Full-size Mini PCIe on board (PCIe/USB/SATA, SATA by default) 1 x Half-size Mini PCIe on board (PCIe/USB, PCIe by default) 1 x SIM slot for option (Option wifi/BT/4G and antenna at rear side) 1 x PCI and 1 x PCIe x1 slot via TB-560P1E11 (default)	
Display		
	Standard	High Brightness Optional
Display Type	17" TFT-LCD	17" TFT-LCD
Max. Resolution	1280 x 1024	1280 x 1024
Max. Color	16.7M	16.7M
Luminance (cd/m ²)	350	1000
View Angle	160(H) / 140(V)	170(H) / 160(V)
Contrast	800:1	1000:1
Backlight Lifetime	50,000 hrs	50,000 hrs
Option	Auto Dimming	Auto Dimming
Touch Screen		
	Resistive Touch	Projected Capacitive Touch
Interface	USB	USB
Light Transmission(%)	Over 80%	Over 90%
Power		
Power Input	DC 9~36V Power input, option AC power input	

Dimensions

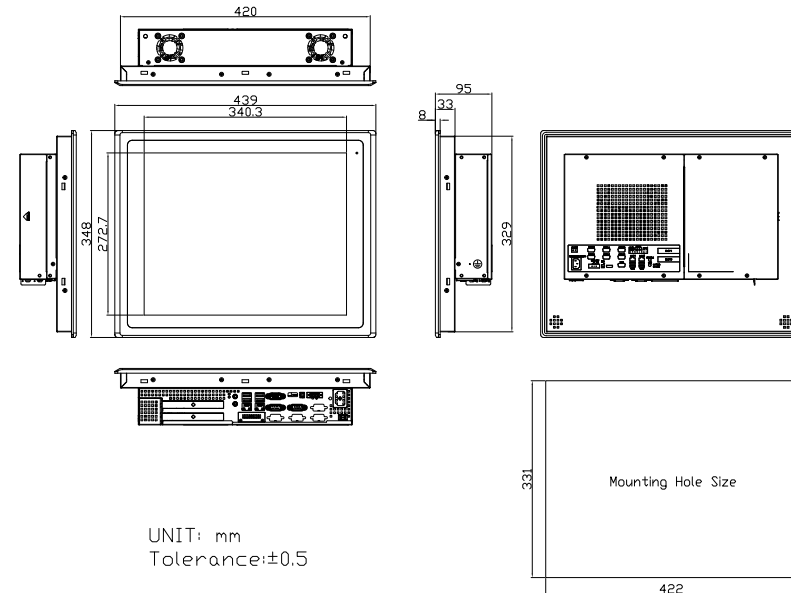

Mechanical	
Construction	Aluminum die-casting front bezel and steel chassis, Stainless front bezel (option)
Mounting	Panel Mount
IP Rating	Front Panel IP66
Dimensions	439 x 348 x 95 mm
Net Weight	7.6 kg
Environmental	
Operating Temperature	0~50°C
Storage Temperature	-30~70°C
Humidity	10 to 95% @ 40°C, non-condensing
Certificate	CE / FCC Class A
Operating System Support	
Windows embedded 7	
Windows embedded 8.1	
Windows 10 IoT Enterprise	
Ordering Information	
ViPAC-817R	17" SXGA Intel Celeron N2930 (1.83 GHz) CPU, Fanless panel PC, 2 x 204pin DDR3L SO-DIMM slot, 1 x 2.5" HDD/SSD space, 2 x PCIe x1 slot, resistive touch window, 9~36VDC power input with adaptor, Alu. die-casting front bezel.
ViPAC-817P	17" SXGA Intel Celeron N2930 (1.83 GHz) CPU, Fanless panel PC, 2 x 204pin DDR3L SO-DIMM slot, 1 x 2.5" HDD/SSD space, 2 x PCIe x1 slot, projected capacitive touch, 9~36VDC power input with adaptor, Alu. die-casting front bezel.

V 1.3

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660