

entaira

LNP-800AGH-24 Series


8-Port Industrial PoE+ Unmanaged Ethernet Switches, w/8*10/100/1000Tx (30W/Port), 12~36VDC Power Input




Features

- ► Supports 8-Port 10/100/1000Tx Gigabit RJ45
- ▶ 8-Ports of IEEE 802.3af/at (30 Watts/Port)
- ► Supports 9.6Kbytes Jumbo Frame
- Supports Auto MDI/MDI-X Function
- ▶ Store-and-Forward Switching Architecture
- ► Surge Protection: 2,000 VDC Support
- ► ESD Protection: 8,000 VDC Support
- ► Redundant Power Input Design: 12~36VDC
- ▶ Built-in 1 Relay Output for Fault Alarm
- ► IP30 Rugged Metal Case Design
- ► DIN-Rail and Wall Mount Support
- ▶ Operating Temperature Range: STD: -10° to 60°C, EOT: -40° to 75°C
- ► 5-Year Warranty

INTRODUCTION



Antaira's LNP-800AGH-24 series has been specifically designed for rugged and harsh environmental deployments. This product series is housed in a hardened IP30 rated metal enclosure that includes DIN-rail and wall mounting hardware. There are two wide operating temperature models for either a standard temperature range (STD: -10°C to 60°C) or an extended temperature range (EOT: -40°C to 75°C). The LNP-800AGH-24 series also provides high EFT and ESD protection for any industrial networking application within factory automation, ITS (including on-vehicle), solar, security or any other outdoor environment.

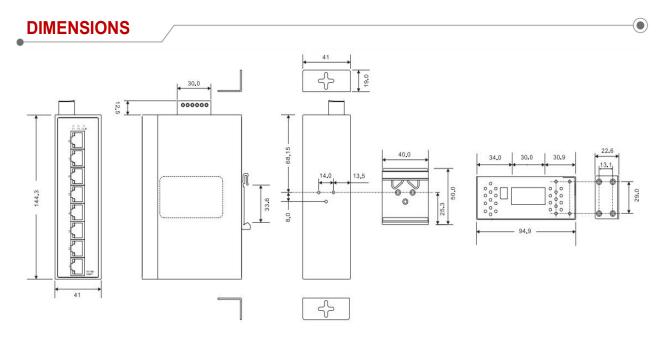

www.antaira.com

Toll-Free:1 (844) 268-2472

T: 1 (714) 671-9000

F: 1 (714) 671-9944



antaira[®]

SPECIFICATIONS



Technology	
Standards	IEEE 802.3 10Tx Ethernet IEEE 802.3U 100Tx Fast Ethernet IEEE 802.3ab 1000Tx Gigabit Ethernet IEEE 802.3x Flow Control for Full Duplex IEEE 802.3at/af PoE (Power-over-Ethernet)
Switch Properties	
Data Process	Store and forward
Transfer Rate	14,880pps for 10Base-T Ethernet port 148,8800pps for 100Base-T Fast Ethernet port 1,480,000pps for 1000Base-T Gigabit Ethernet
MAC Table	2048
Jumbo Frame	9.6Kbytes
Flow Control	IEEE 802.3x for full duplex mode, back pressure for half duplex mode
Port Interface	
Ethernet RJ45 Port	8*10/100/1000BaseTx (PSE: 30W/Port) auto negotiation speed, Full/Half duplex mode, and auto MDI/MDI-X connection
PoE Port Pin Assignment	V+, V+, V-, V-, for pin 1, 2, 3, 6 (End span, MDI-X Alternative A)
Protection	
Overload Current	Present
Power Reverse Polarity	NOT Present
Network Cable	10Base-Tx: 2-pair UTP/STP Cat. 3, 4, 5 cable; 100Base-Tx: 2-pair UTP/STP Cat. 5 cable. 1000Base-Tx: 4-pair UTP/STP Cat. 5/5e/6

	cteristics Per Unit: Power 1 & 2 (Green), Fault
LED Indicator	(Red)
Housing	Metal IP30 rated
Dimension	41.0 x 144.3 x 94.9 mm
Weight	Unit: 0.9 lbs Shipping: 1.5 lbs
Mounting	DIN-Rail & Wall-mount (included)
Power Requirement	nt
Input Voltage	12~36VDC Redundant Input
Power Connection	1 removable 6-contact terminal block
PoE Power Output	30W @ 12~36VDC (per PoE port)
Power Consumption	10 Watts (no PD included)
PoE Power Budget	90 Watts / 12VDC, 200 Watts / 24-36VDC
Environmental Lin	nits
Operating	STD: -10° to 60°C
Temperature	EOT: -40° to 75°C
Storage Temperature	-40°C ~ 85°C
Ambient Relative Humidity	5 to 95%, (non-condensing)
Regulatory Approv	
EMI	FCC Class A
EMS	EN61000-4-2,3,4,5,6,8,11
Free Fall	IEC60068-2-32
Shock	IEC60068-2-27
Vibration	IEC60068-2-6
Green	RoHS Compliant
Certifications	FCC, CE, UL 508, UL Class 1 Division 2, ISA 12.12.01
Warranty	5 Years

ORDERING INFO



LNP-800AGH-24	8-Port Industrial PoE+ Unmanaged Ethernet Switches, w/8*10/100/1000Tx (30W/Port), 12~36VDC Power Input
LNP-800AGH-24-T	8-Port Industrial PoE+ Unmanaged Ethernet Switches, w/8*10/100/1000Tx (30W/Port), 12~36VDC Power Input; EOT: -40° to 75°C
Optional Accessories	
MDR-60-24	60W Industrial DIN-Rail Power Supply, 24VDC
DR-75-24	75W Industrial DIN-Rail Power Supply, 24VDC
DR-120-24	120W Industrial DIN-Rail Power Supply, 24VDC
SDR-240-24	240W Industrial DIN-Rail Power Supply, 24VDC
SDR-480-24	480W Industrial DIN-Rail Power Supply, 24VDC

www.antaira.com

Toll-Free:1 (844) 268-2472 | T: 1 (714) 671-9000

F: 1 (714) 671-9944



Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508 Support: +1 347 719 4508

1309 Coffeen Ave Ste 1200 Sheridan WY 82801 USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050 Support: +44 (0)1785 879 050

Unit A5 Douglas Park Stone Business Park Stone ST15 0YJ United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660