

Rugged Embedded



POC-40

Intel® Elkhart Lake Atom® x6211E Extreme-compact Embedded Controller



Key Features

- Intel® Elkhart Lake Atom® x6211E dual-core processor
- 49 x 89 x 112 mm extremely compact form factor
- Rugged -25°C to 70°C fanless wide-temperature operation
- Two GigE ports, two USB 3.1 Gen1 ports and two USB2.0 ports
- M.2 2280 M key SATA storage interface
- One M.2 B key socket supporting 5G/ 4G 3042/ 3052 modules
- One M.2 E key socket for WiFi 5/ WiFi 6 modules
- One COM port with RS-232/ 422/ 485 modes and three RS-232 COM ports

Preliminary

Contact Neosys

Get Quote

Introduction

POC-40 is an extremely compact fanless controller with dimensions measuring just 49 x 89 x 112 mm. It features Elkhart Lake Atom® processor and is designed for space-restricted applications such as factory data collection, rugged edge computing and mobile gateway.

Utilizing Intel's 10nm process technology, the new Elkhart Lake Atom® x6211E dual-core processor can deliver up to 1.7 times the performance boost over its previous generation. In comparison to POC-200, POC-40 provides 1.9 times computing performance at only half the size. It features generic I/O functions, such as two Gigabit Ethernet ports, four USB 3.1 Gen1/ 2.0 ports, four COM ports and optional isolated digital I/Os for industrial communication and control. In addition, by adopting dedicated M.2 B key and E key slots, the POC-40 can fully harness the bandwidth of 5G and WiFi 6 wireless communications to provide wide-area coverage and real-time data transmission for industrial and mobile gateway applications.

With a similar footprint as a PICO-ITX motherboard, Neosys' POC-40 is perfect for projects that require above par performance in an extremely compact package. Ideal for both edge computing and gateway applications, it is a low power consumption and lightweight fanless controller that offers wide-temperature operation for harsh environments.

Specifications

System Core

Processor	Intel® Elkhart Lake Atom® x6211E dual-core 1.2GHz/ 3.0GHz 6W processor
Graphics	Integrated Intel® UHD Graphics
Memory	Up to 32 GB DDR4-3200 SDRAM (one SODIMM slot)

Panel I/O Interface

Ethernet	2x Gigabit Ethernet ports by Intel® I210 GbE controllers
USB 3.1	2x USB 3.1 Gen1 (5 Gbps) ports
USB 2.0	2x USB 2.0 ports
Video Port	1x DisplayPort connector, supporting 4096 x 2160 resolution @ 60Hz
Serial Port	1x software-programmable RS-232/ 422/ 485 port (COM1) 1x 3-wire RS-232 ports (COM2)
Isolated Digital I/O	Optional 4-ch isolated digital input and 4-ch isolated digital output
Audio	1x 3.5 mm jack for mic-in and speaker-out

Storage Interface

M.2	1x M.2 2280 M key SATA interface
-----	----------------------------------

Internal Expansion Bus

M.2 B key	1x M.2 3042/ 3052 B key socket with internal SIM socket for 4G/ 5G module
M.2 E key	1x M.2 2230 E key socket for WiFi 5/ WiFi 6 module

Power Supply

DC Input	1x 4-pin pluggable terminal block for 8-35VDC DC input
Remote Ctrl. & LED Output	1x 4-pin pluggable terminal block for remote control and PWR LED output

Mechanical

Dimension	49 mm (W) x 89 mm (D) x 112 mm (H)
Weight	TBC
Mounting	DIN-rail mount (standard) or Wall-mount (optional)

Environmental


Operating Temperature	-25°C ~ 70°C
Storage Temperature	-40°C ~ 85°C
Humidity	10%~90% , non-condensing
Vibration	Operating, MIL-STD-810G, Method 514.6, Category 4
Shock	Operating, MIL-STD-810G, Method 516.6, Procedure I, Table 516.6-II
EMC	CE/FCC Class A, according to EN 55032 & EN 55024

POC-40




Appearance

DIO (Optional)

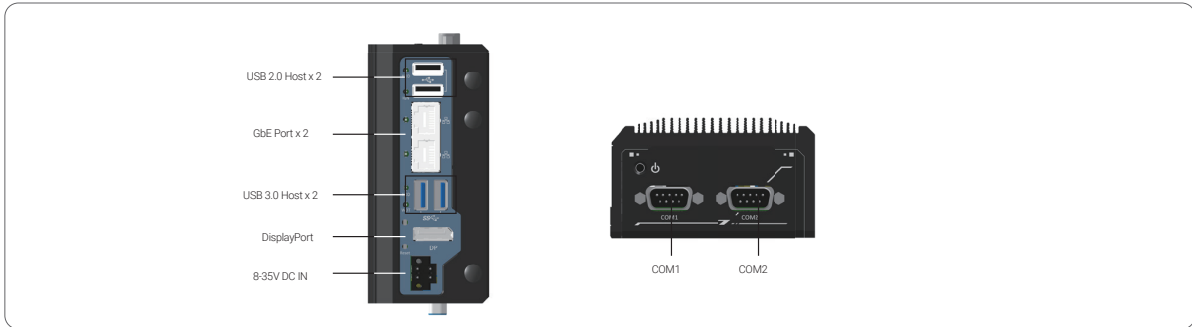

Dimensions

Unit : mm

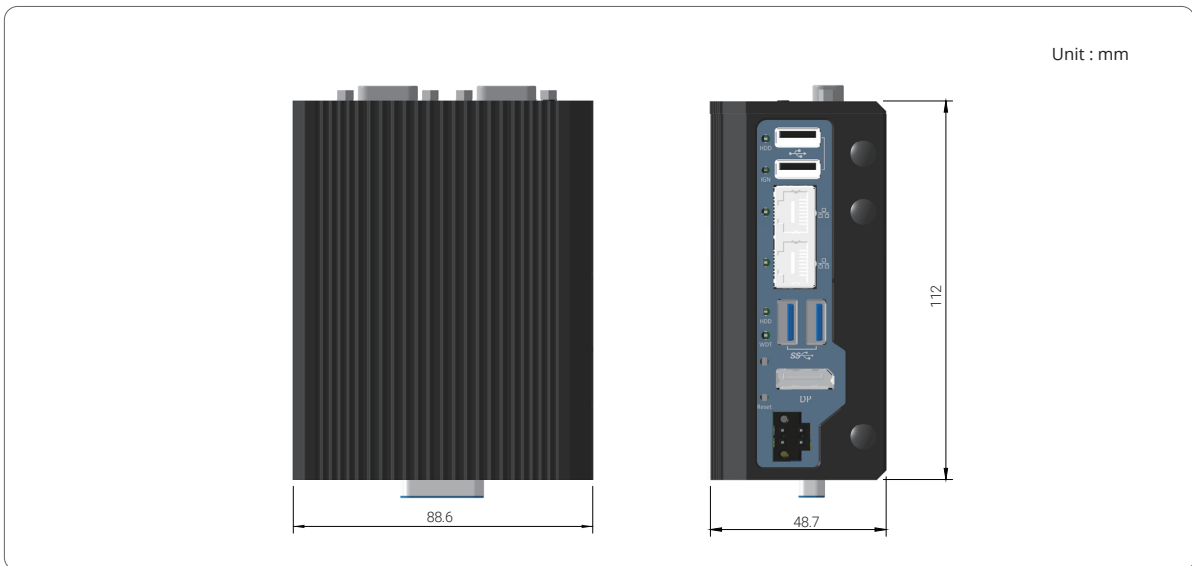

Ordering Information

Model No.	Product Description
POC-40	Intel® Elkhart Lake Atom® x6211E Extreme-compact Embedded Controller

Optional Accessories

PA-60W-OW	60W AC/DC power adapter with 12V, 5A DC output, cord end terminals for terminal block. Operating temperature : -30 to 60 °C
-----------	---

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660