

LMP-1002G-SFP Series

10-Port Industrial Gigabit PoE+ Managed Ethernet Switch, w/8*10/100/1000Tx (30W/Port) + 2*100/1000 SFP Slots



Features


- ▶ Supports 8*10/100/1000Tx IEEE 802.3at/af Compliant with 30W/Port and 2*100/1000 SFP Slots for Fiber Connections
- ▶ Network Redundancy: STP/RSTP/MSTP, and G.8032 ERPS (Recovery Time <50ms)
- ▶ Supports IPv4/IPv6, and DHCP Option 66/67/82
- ▶ Supports Modbus/TCP protocol for Device Management and Monitoring
- ▶ Configuration: Web Console, Telnet, CLI Command
- ▶ IGMP v1/v2 for Multicast Traffic Filtering
- ▶ QoS (IEEE802.1p/1Q), CoS/ToS to Increase Determinism
- ▶ IEEE802.1Q VLAN for Easy Network Planning
- ▶ Enhanced Network Security with IEEE802.1X, SNMP v1/v2c/v3, HTTPS, and SSH/SSL
- ▶ Auto Warning by Exception through E-mail, Relay Output
- ▶ Support RMON Function for Efficient Network Monitoring
- ▶ Support Port Mirroring for Online Diagnostic
- ▶ 5-Year Warranty

INTRODUCTION

Antaira's LMP-1002G-SFP series is a 10-port industrial Gigabit PoE+ managed Ethernet switch embedded with 8*10/100/1000Tx Ethernet ports that support IEEE802.3at/af for a maximum of 30W/port, and 2*100/1000 dual rate SFP slots for Gigabit fiber connections. It is a fully manageable Layer 2 Ethernet switch that is pre-loaded with a user-friendly web management console design. It supports the ring network redundancy function using the market's open standard ITU-T G.8032 ERPS (Ethernet Ring Protection Switch) protocol that has a <50ms network recovery time. The advanced network filtering and security functions, such as, IGMP, VLAN, QoS, SNMP, RMON, Modbus TCP, and 802.1X/HTTPS/SSH/SSL increase determinism and improve network management for remote SCADA systems or control networks.

The LMP-1002G-SFP series is IP30 rated and DIN-rail mountable. There are also two wide operating temperature models for either a standard temperature range (STD: -10°C to 70°C) or an extended temperature range (EOT: -40°C to 75°C). It also provides high EFT and ESD protection for industrial networking applications, such as, power/utility, water wastewater, oil/gas/mining, factory automation, security surveillance, ITS and any other outdoor or harsh environment.

DIMENSIONS

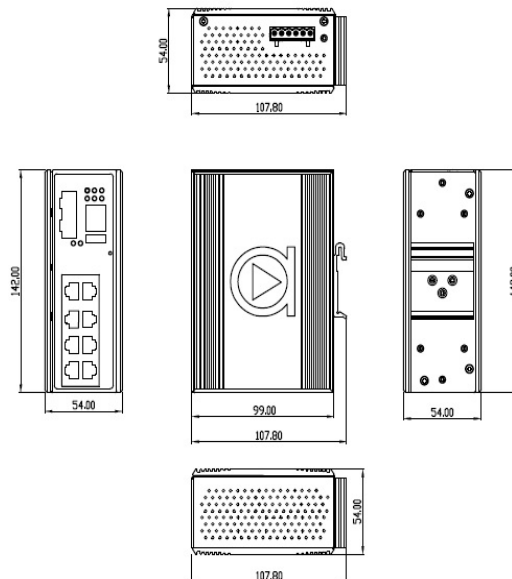

SPECIFICATIONS

Technology		Protection	
Standards	IEEE 802.3 10Tx Ethernet	Overload Current	Present
	IEEE 802.3u 100Tx Fast Ethernet	Power Reverse Polarity	Present
	IEEE 802.3ab 1000Tx Gigabit Ethernet	CPU Watchdog	Present
	IEEE 802.3z Gigabit Fiber	Network Cable	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable; 100Base-TX: 2-pair UTP/STP Cat. 5 cable. EIA/TIA-568 100-ohm (100m)
	IEEE 802.3x Flow Control for Full Duplex		1000BaseTX: UTP/STP Cat.5/5E cable; EIA/TIA-568 100-ohm (100m)
	IEEE 802.3ad for Port Trunk with LACP	Mechanical Characteristics	
	IEEE 802.3at/af PoE (Power-over-Ethernet)	Housing	Metal, IP30 rated
	IEEE 802.1d STP (Spanning Tree Protocol)	Dimensions	54 x 142 x 99 mm
	IEEE 802.1w RSTP (Rapid Spanning Tree Protocol)	Weight	Unit: 2.4 lbs Shipping: 3.2 lbs
	IEEE 802.1s MSTP (Multiple Spanning Tree Protocol)	Mounting	DIN-Rail; Wall-mount (Optional)
ITU-T G.8032/Y.1344 ERPS (Ethernet Ring Protection Switch) Protocol	Power Requirement		
IEEE 802.1Q for VLAN Tagging	Input Voltage	48~55VDC Redundant Input	
IEEE 802.1x for Network Authentication	Power Connection	1 removable 6-contact terminal block	
IEEE 802.1p QoS/CoS Protocol for Traffic Prioritization	PoE Power Output	25W/port @ 48VDC power input 30W/port @ 51~55VDC power input 15 Watts (no PD included)	
IGMPv1/v2, SNMPv1/v2c/v3, TFTP, SNMP, SMTP, RMON, HTTP, HTTPS, Telnet, Syslog, DHCP Option 66/67/82, SSH/SSL, Modbus/TCP, LLDP, IPv4/IPv6	Power Consumption	215 Watts @ 48VDC 255 Watts @ 51~55VDC	
Switch Properties		Environmental Limits	
Switch Architecture	Back-Plane (Switching Fabric): 10.0Gbps	Operating Temperature	STD: -10° to 70°C EOT: -40° to 75°C
Configuration	Web Console, Telnet, CLI	Storage Temperature	-40°~85°C
Processing Type	Store-and-Forward	Ambient Relative Humidity	5 to 95%, (Non-condensing)
Flow Control	IEEE 802.3x for full duplex mode, back pressure for half duplex mode	Regulatory Approvals	
Transfer Rate	14,880pps for 10Base-T Ethernet 148,800pps for 100Base-T Fast Ethernet 1,488,000pps for Gigabit Ethernet	EMI	FCC Class A
Packet Buffer	4 Mbits	EMS	IEC61000-4-2,3,4,5,6,8 IEC61000-6-2,4
Jumbo Frame	9.6K	Free Fall	IEC60068-2-32
MAC Table Size	8K	Shock	IEC60068-2-27
VLAN Group	1 ~ 4094	Vibration	IEC60068-2-6
IGMP Group	Up to 256 Groups	Green	RoHS Compliant
Port Interface		Certifications	FCC, CE, UL 61010-1, 61010-2-201, NEMA TS2
Ethernet Port	8*10/100/1000BaseTx (PSE: 30W/Port) auto negotiation speed, Full/Half duplex mode, and auto MDI connection	Warranty	5 Years
Fiber Port	2*100/1000 SFP Slots for Fiber		
Wavelength	Refer to SFP Modules		
RS232 Serial Console	1*RS232 in RJ45 connector with console cable, 115.2Kbps, 8,N,1		
Configuration Backup	1*USB 2.0		
LED Indicators	Per Unit: Power 1 & 2 (Green), Fault (Red) PoE: Feeding Power (Green)		

ORDERING INFO

LMP-1002G-SFP	10-Port Industrial Gigabit PoE+ Managed Ethernet Switch, w/8*10/100/1000Tx (30W/Port) and 2*100/1000 SFP Slots
LMP-1002G-SFP-T	10-Port Industrial Gigabit PoE+ Managed Ethernet Switch, w/8*10/100/1000Tx (30W/Port) and 2*100/1000 SFP Slots; EOT: -40° to 75°C

Optional Accessories

MDR-60-48	60 Watt Industrial Slim Single Output DIN-Rail Power Supply – 48VDC / 1.25 Amps
DR-75-48	75 Watt Industrial Single Output DIN-Rail Power Supply – 48VDC / 1.6 Amps
DR-120-48	120 Watt Industrial Single Output DIN-Rail Power Supply – 48VDC / 2.5 Amps
SDR-240-48	240 Watt Industrial Slim High-Efficiency Single Output DIN-Rail Power Supply – 48VDC / 5.0 Amps



SFP-M-T	1 Gigabit Fiber SFP Transceiver, Multi Mode 550M / LC / 850nm, -40°~85°C
SFP-S10-T	1 Gigabit Fiber SFP Transceiver, Single Mode 10KM / LC / 1310nm, -40°~85°C
DIN-RACK-2U	DIN-Rail to 19" Rack Mount Adapter for all DIN-Rail Mountable Products, 2U Height

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660