


ADAM-6015 ADAM-6017 ADAM-6018

7-ch Isolated RTD Input Modbus TCP Module
8-ch Isolated Analog Input Modbus TCP Module with 2-ch DO
8-ch Isolated Thermocouple Input Modbus TCP Module with 8-ch DO



ADAM-6015

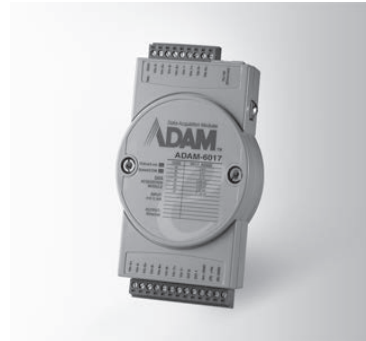

ADAM-6017



ADAM-6018



Specifications

Analog Input

- Channels** 7 (differential)
- Input Impedance** > 10 MΩ
- Input Connections** 2 or 3 wire
- Input Type** Pt, Balco and Ni RTD
- RTD Types and Temperature Ranges**

Pt 100	-50°C	~	150°C
	0°C	~	100°C
	0°C	~	200°C
	0°C	~	400°C
	-200°C	~	200°C
Pt 1000	-40°C	~	160°C

Supports both IEC 60751 ITS90 (0.0385 W/W/°C) and JIS C 1604 (0.0392 W/W/°C)

Balco 500	-30°C	~	120°C
Ni 518	-80°C	~	100°C
	0°C	~	100°C
- Accuracy** ±0.1 % or better
High speed mode ±0.5% or better
- Span Drift** ±25 ppm/°C
- Zero Drift** ±6 μV/°C
- Resolution** 16-bit
- Sampling Rate** 10 sample/ second (total)
High speed mode: 1K sample/second (total)
CMR @ 50/60 HZ 90dB
NMR @ 50/60 HZ 60dB
* high speed mode does not support CMR/NMR
- Wire Burnout Detection**

Ordering Information

- ADAM-6015** 7-ch Isolated RTD Input Modbus TCP Module

Specifications

Analog Input

- Channels** 8 (differential)
- Input Impedance** > 10 MΩ (voltage)
120 Ω (current)
- Input Type** mV, V, mA
- Input Range** ±150mV, ±500mV, ±1 V, ±5V, ±10V, 0 ~ 150mV, 0 ~ 500mV, 0 ~ 1V, 0 ~ 5V, 0 ~ 10V, 0 ~ 20mA, 4 ~ 20mA, ±20mA
- Accuracy** ±0.1% (voltage)
±0.2% (current)
- Span Drift** ±25 ppm/°C
- Zero Drift** ±6 μV/°C
- Resolution** 16-bit
- Sampling Rate** 10 or 100 sample/ second (total)
CMR @ 50/60 HZ 90dB
NMR @ 50/60 HZ 67dB
- Common-Mode Voltage** 350V_{DC}
- Digital Output**
 - Channels** 2, open collector to 30 V, 100 mA max. load
 - Power Dissipation** 300 mW for each module
 - Output Delay** On: 100μs
Off: 150μs

Ordering Information

- ADAM-6017** 8-ch Isolated AI with 2-ch DO Modbus TCP Module

Specifications

Analog Input

- Channels** 8 (differential)
- Input Impedance** > 10 MΩ
- Input Type** Thermocouple
- Thermocouple Type and Range:**

J	0 ~ 760°C	R	500 ~ 1,750°C
K	0 ~ 1,370°C	S	500 ~ 1,750°C
T	-100 ~ 400°C	B	500 ~ 1,800°C
E	0 ~ 1,000°C		
- Accuracy** ±0.1%
- Span Drift** ±25 ppm/°C
- Zero Drift** ±6 μV/°C
- Resolution** 16-bit
- Sampling Rate** 10 sample/ second (total)
CMR @ 50/60 HZ 90dB
NMR @ 50/60 HZ 60dB
- Wire Burnout Detection**
- Digital Output**
 - Channels** 8, open collector to 30 V, 100 mA max. load
 - Power Dissipation** 300 mW for each module

Ordering Information

- ADAM-6018** 8-ch Isolated Thermocouple Input Modbus TCP Module w/ 8-ch DO

Common Specifications

General

- LAN** 10/100Base-T(X)
- Power Consumption** 2.5 W @ 24 V_{DC} (ADAM-6015)
2.7 W @ 24 V_{DC} (ADAM-6017)
2 W @ 24 V_{DC} (ADAM-6018)
- Connectors** 1 x RJ-45 (LAN), Plug-in screw terminal block (I/O and power)
- Watchdog** System (1.6 second) and Communication (programmable)

- Power Input** 10 ~ 30 V_{DC}
- Supports Peer-to-Peer**
- Supports GCL**
- Supports Modbus/TCP, TCP/IP, UDP, HTTP and MQTT (ADAM-6017) Protocols**

Protection

- Over Voltage Protection** ±35 V_{DC}
- Isolation Protection** 2,000 V_{DC}
- Built-in TVS/ESD Protection**
- Power Reversal Protection**

Environment

- Operating Temperature** -10 ~ 70°C (14 ~ 158°F)
-40 ~ 70°C (-40~158°F) (ADAM-6017-D)
- Storage Temperature** -20 ~ 80°C (-4 ~ 176°F)
-40 ~ 80°C (-40~176°F) (ADAM-6017-D)
- Operating Humidity** 20 ~ 95% RH (non-condensing)
- Storage Humidity** 0 ~ 95% RH (non-condensing)

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660