

Rugged Embedded



Nuvo-9650AWP Series

Affordable IP66 Waterproof Computer with Intel® 14th/ 13th/ 12th-Gen Core™ CPU, 4x M12 PoE+ and Dual-mode Type-C DisplayPort/ USB3 Port



CE FC

Key Features

- Intel® 14th/ 13th /12th-Gen Core™ 24C/ 32T 35W/ 65W CPU
- Affordable IP66-rated design for waterproof and dustproof
- Up to 96GB DDR5 4800 SODIMM
- -25°C to 70°C wide-temperature fanless operation
- 3x 2.5Gb and 1x Gb Ethernet ports via M12 X-coded connectors, with 802.3at PoE+ option
- 1x waterproof USB3.2 Type-C port supporting alternative mode for DisplayPort and USB3.2 dual output
- 8V to 48V DC input with built-in ignition power control

[CONTACT US](#)

[GET QUOTE](#)

Introduction

Nuvo-9650AWP is a cost-effective IP66 waterproof computer with Intel® 14th/13th/12th-Gen Core™ processor designed for harsh and demanding environments. Thanks to its streamlined waterproof chassis and standardized cable kit, Nuvo-9650AWP redefines affordable total cost of ownership (TCO) for industrial computing with significant enhancements including ruggedness against extended operating temperature, intensive shock and vibration, dust, humidity and salinity.

Nuvo-9650AWP offers abundant I/O functionality for generic application requirements, including multiple 2.5GbE/ GbE, USB 2.0 and isolated RS-232 and RS-422/485 ports, all through waterproof M12 connectors. It also has a specialized waterproof type-C connector supporting Type-C alternative mode, or it can enable both 5 Gbps USB3 data transmission speed and 4K DisplayPort video output via a Type-C hub. Moreover, Nuvo-9650AWP is equipped with 8-48V wide-range DC input with ignition power control, and is compliant with MIL-STD-810H shock/ vibration certification for in-vehicle installation, such as mining trucks and farming vehicles.

The integration of IP66 waterproof capability with embedded computer eliminates environmental limitations where exposure to dust or liquids may be of concern. Its affordable waterproof design further reduces the gap in TCO for budget-conscious projects which is defining a new category of embedded computer that strikes a sweet spot between ruggedness performance and cost.


Specifications

System Core		Storage Interface			
Processor	Supporting Intel® 14 th -Gen Core™ CPU (LGA1700 socket, 65W/ 35W TDP)	SATA HDD	2x Internal SATA port for 2.5" HDD/ SSD installation		
	- Intel® Core™ i9-14900/ i9-14900T	M.2	1x M.2 2280 M key socket (PCIe Gen4 x4) for NVMe SSD		
	- Intel® Core™ i7-14700/ i7-14700T	Internal Expansion Bus			
	- Intel® Core™ i5-14500/ i5-14400/ i5-14500T	Mini PCI Express	2x full-size mini PCI Express socket (PCIe + USB2)		
	- Intel® Core™ i3-14100/ i3-14100T	M.2 B key	1x M.2 2242/3052 B key socket with SIM slot for M.2 5G/ 4G module		
Processor	Supporting Intel® 13 th -Gen Core™ CPU (LGA1700 socket, 65W/ 35W TDP)	Power Supply			
	- Intel® Core™ i9-13900E/ i9-13900TE	DC Input	8V to 48V DC input with built-in ignition power control		
	- Intel® Core™ i7-13700E/ i7-13700TE	Mechanical			
	- Intel® Core™ i5-13500E/ i5-13400E/ i5-13500TE	Dimension	225mm (W) x 286mm (D) x 90mm (H)		
	- Intel® Core™ i3-13100E/ i3-13100TE	Weight	5.25 kg		
Processor	Supporting Intel® 12 th -Gen Core™ CPU (LGA1700 socket, 65W/ 35W TDP)	Mounting	wall-mounting (Optional)		
	- Intel® Core™ i9-12900E/ i9-12900TE	Environmental			
- Intel® Core™ i7-12700E/ i7-12700TE	Operating Temperature	Operating Temperature with 35W CPU			
- Intel® Core™ i5-12500E/ i5-12500TE		-25°C ~ 70°C*			
- Intel® Pentium® G7400E/ G7400TE		with 65W CPU			
- Intel® Celeron® G6900E/ G6900TE	-25°C ~ 70°C* (configured as 35W TDP mode)		Storage Temperature	-40°C to 85°C	
Chipset		Intel® H610E platform controller hub			
Graphics		Integrated Intel® UHD Graphics 770 (32EU) / 730 (24EU)		Humidity	10% to 90% , non-condensing
Memory		Up to 96 GB DDR5 4800 SDRAM (two SODIMM slots)		Vibration	MIL-STD-810H, Method 514.8, Category 4
TPM		Supports dTPM 2.0		Shock	MIL-STD-810H, Method 516.8, Procedure I
I/O Interface		Environmental		EMC	CE/FCC Class A, according to EN 55032 & EN 55035
Ethernet	1x Gigabit Ethernet port by Intel® I219-LM (M12 X-coded)	* For sub-zero operating temperature, a wide temperature HDD or Solid State Disk (SSD) is required.			
PoE+	Optional IEEE 802.3at PoE+ PSE for 4x 2.5GbE/GbE ports 100 W total power budget				
USB 3.2	1x USB 3.2 Gen1 (5 Gbps) port in type-C waterproof connector				
USB 2.0	1x reserved USB 3.2 Gen1 type-A connector (rear side)				
Video Port (Integrated Graphics)	2x USB 2.0 (M12 A-coded)				
	1x USB 2.0 (internal)				
Serial Port	1x DisplayPort in type-C waterproof connector, supporting 4096 x 2304 resolution				
	1x VGA (M12 A-coded), supporting 1920 x 1200 resolution				
	1x reserved DisplayPort, supporting 4096 x 2304 resolution (rear side)				
	1x isolated RS-232 port (COM1)				
	1x isolated RS-422/485 ports (COM2) via M12 A-coded, 8-pin connector				

Appearance



Dimensions

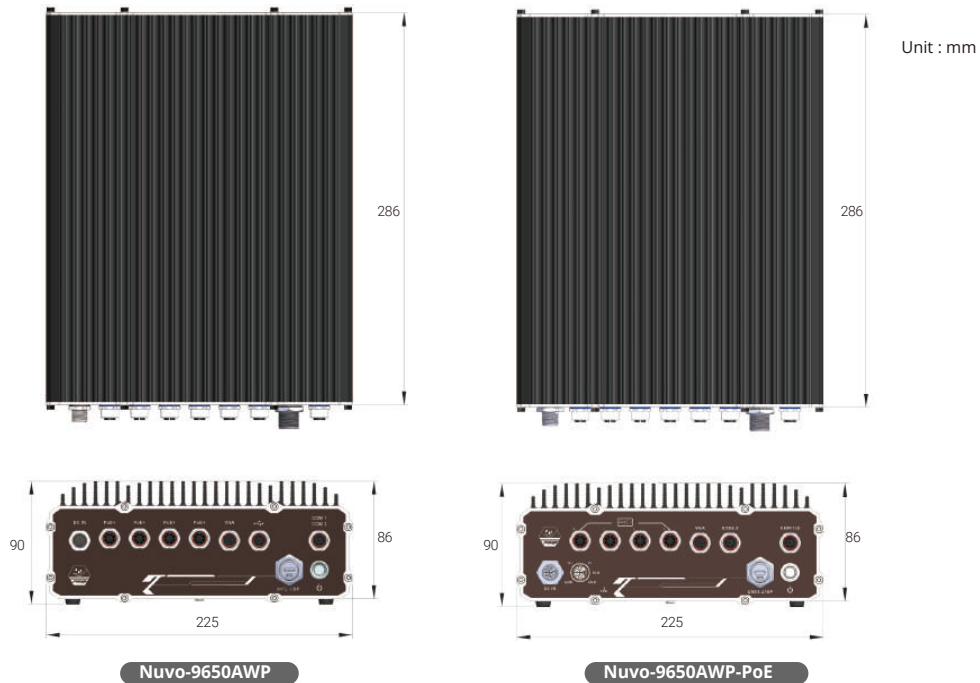

Ordering Information

Model No.	Product Description
Nuvo-9650AWP	Affordable IP66 waterproof Intel® 14th/ 13th/ 12th-Gen Core™ computer with 4x 2.5GbE/GbE and USB3.2 Type-C ports supporting DP display
Nuvo-9650AWP-PoE	Affordable IP66 waterproof Intel® 14th/ 13th/ 12th-Gen Core™ computer with 4x M12 PoE+ and USB3.2 Type-C ports supporting DP display

Optional Accessories

PA-160W-OW	160W AC-DC power adapter 20V/8A; 18AWG/120cm; cord end terminals for terminal block, operating temperature: -30°C to 70°C. (recommended for 35W CPU)
PA-280W-CW6P-2P	280W AC-DC power adapter 24V 11.67A, 85-264VAC, -30--+70°C w/ Wafer FML6P to 2P End Terminal cable for AWP/ SEMIL (recommended for 65W CPU or 35W CPU with PoE+ option)
Cblkit-M12-Nuvo-9650AWP	Nuvo-9650AWP M12 cable kit, including 4x Cbl-M12X8M-RJ45F-100CM, 1x Cbl-M12A8M-2U2TA-180CM1, 1x Cbl-M12A17M-VGA-180CM2, 1x Cbl-M12A8M-2DB9M-180CM, 1x Cbl-M12A5F-OW3-180CM
Cblkit-M12-Nuvo-9650AWP-PoE	Nuvo-9650AWP-PoE M12 cable kit, including 4x Cbl-M12X8M-RJ45F-100CM, 1x Cbl-M12A8M-2U2TA-180CM1, 1x Cbl-M12A17M-VGA-180CM2, 1x Cbl-M12A8M-2DB9M-180CM, 1x Cbl-M12L5F-OW5-180CM
Cbl-TpCPlug-DPM-1M	TypeC Male Plug to DP Male Cable, Length : 1M
Cbl-TpCPlug-U3TA-50CM	TypeC Male Plug to USB3.0 Type-A FML, Length: 50CM
Cbl-TpCPlug-UTpCF-50CM	TypeC Male Plug to USB Type-C FML Cable, Length : 50CM
Wmkit-Nuvo9650AWP	Wall mounting assembly for Nuvo-9650AWP

All specifications and photos are subject to change without prior notice

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660