



GPU COMPUTING SYSTEM

# RCO-6000-CML-4N-2060S

AI Edge Inference Computer w/ LGA 1200 for Intel 10th Gen CPU & W480E PCH, 4 Bay U.2 7mm, RTX 2060S Integrated



**Features**

- LGA 1200 socket for 10th Gen. Intel® CML S Processor (65W/35W TDP)
- Intel® W480E chipset
- NVIDIA GeForce® RTX 2060 Super Graphics engine based on NVIDIA Turing™ GPU architecture
- 2x DDR4 2666/2933MHz SODIMM. Max. up to 64GB
- 6 Display interface supported by 1x DVI-I, 1x DVI-D, 3x DisplayPort, 1x HDMI
- 2x Intel® GbE supporting Wake-on-LAN and PXE
- 2x Full-size Mini PCIe for communication or expansion modules, 2x SIM socket
- 1x Removable 4 Bay NVMe SSD Module with RAID 0, 1, 5 (Support H=7mm)
- 3x 2.5" SATA HDD Bay (1x Internal) and with RAID 0, 1, 5 support
- 1x M.2 (E Key, PCIe x1, USB 2.0, 2230)
- 8x RS-232/422/485 (6x internal), 6x USB 3.2 Gen 2, 3x USB 3.2 Gen 1 (1x internal)
- 9 to 48VDC Wide Range Power Input Supporting AT/ATX Mode
- Wide Operating Temperature -25°C to 60°C (35W/65W CPU)
- TPM 2.0 Supported
- UL Listed

**Specifications**

**System**

**Processor**  
Support 10th Gen Intel® CML S Processor (LGA 1200, 65W/35W TDP)  
-Intel® Xeon® W-1290TE, 10 Cores, 20MB Cache, up to 4.5 GHz  
-Intel® Xeon® W-1270TE, 8 Cores, 16MB Cache, up to 4.4 GHz  
-Intel® Xeon® W-1250TE, 6 Cores, 12MB Cache, up to 3.8 GHz  
-Intel® Core™ i9-10900E, 10 Cores, 20MB Cache, up to 4.7 GHz  
-Intel® Core™ i9-10900TE, 10 Cores, 20MB Cache, up to 4.5 GHz  
-Intel® Core™ i7-10700E, 8 Core, 16MB Cache, up to 4.5 GHz  
-Intel® Core™ i7-10700TE, 8 Cores, 16MB cache, up to 4.4 GHz  
-Intel® Core™ i5-10500T, 6 Cores, 12MB Cache, up to 4.2 GHz  
-Intel® Core™ i5-10500TE, 6 Core, 12MB Cache, 3.7 GHz  
-Intel® Core™ i3-10100T, 4 Cores, 6MB cache, up to 3.8 GHz  
-Intel® Core™ i3-10100TE, 4 Cores, 9MB Cache, up to 3.6 GHz

**System Chipset** Intel® W480E Chipset  
**LAN Chipset** GbE1: Intel I219 (Support Wake-on-LAN and PXE)  
GbE2: Intel I210 (Support Wake-on-LAN and PXE)  
**Audio Codec** Realtek ALC888S  
**System Memory** 2x 260-Pin DDR4 2666 /2933MHz SODIMM.  
Max. up to 64GB (ECC and Non-ECC)  
**Graphics** Intel® UHD Graphics 630  
**BIOS** AMI 256Mbit SPI BIOS  
**Watchdog** Software Programmable Supports 1-255 sec. System Reset  
**TPM** TPM 2.0

**Display**

**Display Port** 3x DisplayPort  
**DVI** 1x DVI-I, 1x DVI-D  
**HDMI** 1x HDMI  
**Multiple Display** 6 Display interfaces

**Storage**

**NVMe** 1x Removable Cannister Brick with 2.5" 4 Bay U.2 NVMe SSD (Support H=7mm)  
**SIM Socket** 2x External SIM socket (Mini PCIE attached)  
**SSD/HDD** 1x Internal 2.5" SATA/SSD HDD Bay (support H=9mm)  
2x Removable 2.5" SATA HDD Bay (support H=7mm, Hot-swappable)  
Support RAID 0, 1, 5, 10

**Expansion**

**M.2** 1x M.2 (E Key, PCIe x1, USB 2.0, 2230)  
**Mini PCIe** 2x Full-size Mini PCIe  
**PCIe** 1x PCIe x16 (8-lane, Occupied by GPU)  
1x PCIe x4 (1 Lane)

**Expansion Modules**  
Occupied One Universal I/O Slot:  
• 4-port GbE module with Intel® I350 Chipset, RJ-45 or M12 connector (PoE optional)  
• 2-Port RJ45 10GbE with Intel X710 Chipset  
• 4-Port USB with Renesas uPD720201K8 host controller (share PCIe Gen2 x1 bandwidth)  
• 1x M.2 for 5G (B Key, PCIe x1, USB 3.0, 3042/3052), Including 2x SIM socket, 1x SIM switch (1x Universal Slot Only)

**I/O**

**Audio** 1x Mic-in, 1x Line-out  
**CAN** 2x CAN 2.0 A/B 2-pin Internal header  
**COM** 2x RS-232/422/485 ; 6x RS-232/422/485 (internal)  
**DIO** 8 in / 8 out (Isolated)  
**LAN** 2x RJ45

Universal I/O Bracket	2x Universal I/O Bracket (By mini PCIe interface)
USB	6x USB 3.2 Gen 2 (10 Gbps) 3x USB 3.2 Gen 1 (5 Gbps, 1x Internal) 2x USB 2.0 header (internal)
Others	5x WiFi Antenna Holes 1x Power Switch, 1x AT/ATX Switch, 1x Remote Power On/Off 1x PC/Car Mode Switch, 1x Delay Time Switch 1x Removable CMOS Battery 4x 4-Pin Power Connector, 1x 4-PIN FAN Connector

**Operating System**

Windows	Windows 10
Linux	Linux kernel

**Power**

Power Adapter	Optional AC/DC 24V/5A, 120W Optional AC/DC 24V/9.2A, 220W Optional AC/DC 24V/11.67A, 280W (For GPU/Card Expansion)
Power Mode	AT, ATX
Power Ignition Sensing	Power Ignition Management
Power Supply Voltage	2x Power Input 9-48VDC 12-48VDC for NVMe/GPU EDGEboost Node
Power Connector	5-pin Terminal Block 4-pin Terminal Block for GPU and NVMe EDGEBoost Node (12V requires 4-pin terminal block)
Power Protection	OVP (Over Voltage Protection) OCP (Over Current Protection) Reverse Protection

**Environment**

Operating Temperature	-25°C to 60°C (35W/65W CPU)
Storage Temperature	-30°C to 85°C
Relative Humidity	10% to 95% (non-condensing)
Certification	UL, CE, FCC Class A
Vibration	With SSD: 3 Grms, 5 - 500 Hz, 0.5 hr/axis With HDD: 1 Grms, 5 - 500 Hz, 0.5 hr/axis
Shock	With SSD: 20G, half sine, 11ms

**Physical**


Dimensions	240 (W) x 261 (D) x 166.9 (H) mm
Weights	11.1 kg
Construction	Extruded Aluminum with Heavy Duty Metal
Mounting Options	Wall Mounting

• For 10th Gen Intel CPUs configured to run at 65W, operating temperatures will be limited to 60°C.  
• 65W CPUs may experience thermal throttling depending on extreme application workloads; this is also due to an increase in the physical CPU cores from the Intel silicon (up to 10 cores). Please note, this does not indicate system malfunction or problems in the fanless design. Please consult our embedded engineers for the best configuration to match your application requirements.  
• All specifications and photos are subject to change without notice.




# RCO-6000-CML-4N-2060S

## External I/O Mechanical Layout

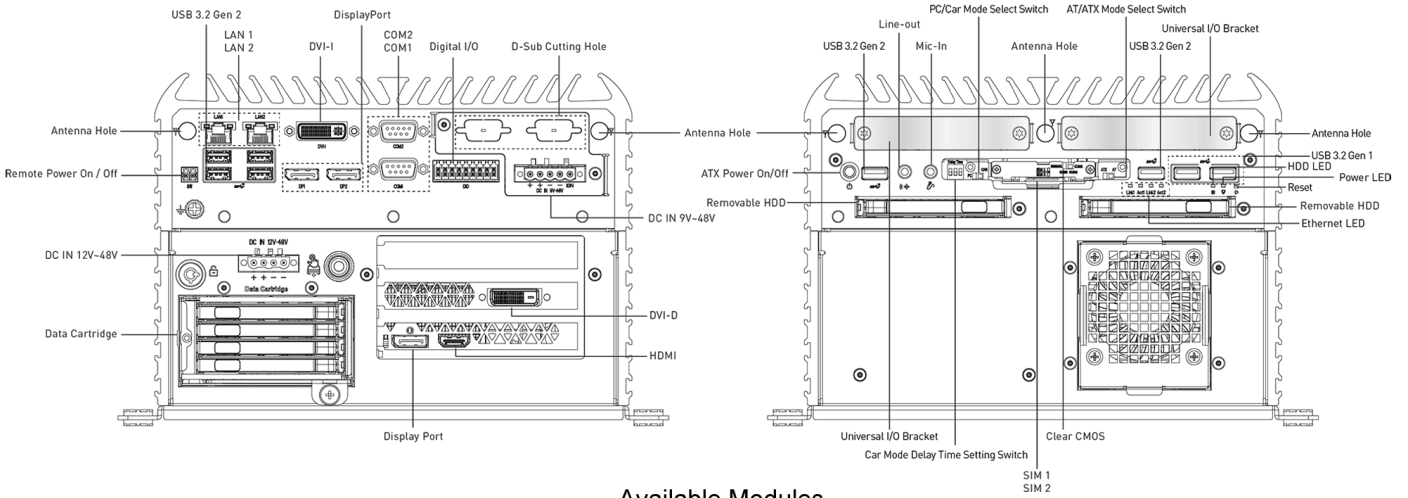


## Available Modules

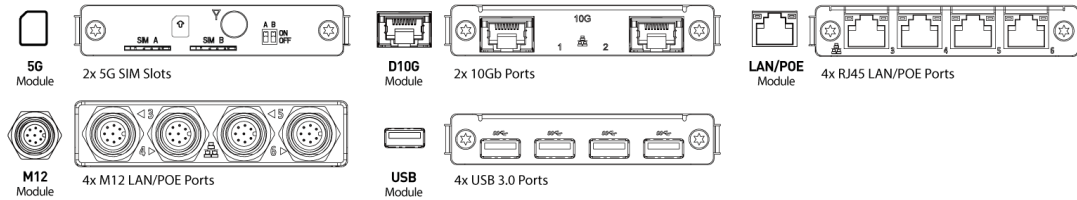

## Dimension

Unit: mm

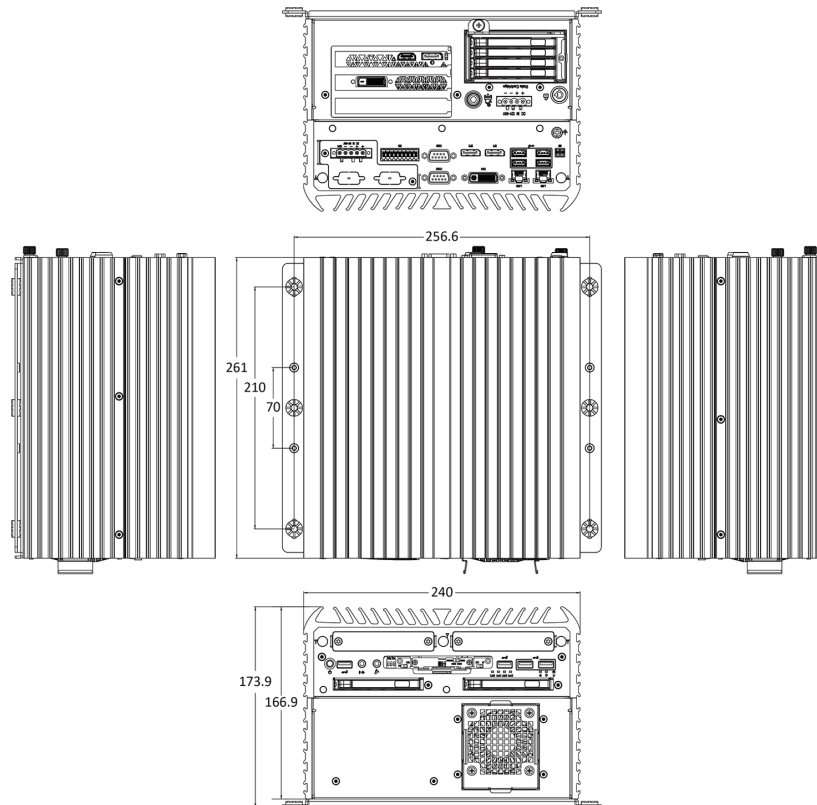



## RCO-6000-CML-4N-2060S

### Available Models

Model No.	Description
RCO-6000-CML-4N-2060S	AI Edge Inference Computer w/ LGA 1200 for Intel 10th Gen Processor and W480E PCH, 4 Bay U.2 7mm, RTX 2060S integrated

### Optional Accessories

Model No.	Description
1-E09A12002	Adapter AC/DC 24V 5A 120W with 3pin Terminal Block Plug 5.0mm Pitch
1-E09A22102	Adapter AC/DC 24V 9.2A 220W with 3pin Terminal Block Plug 5.0mm Pitch
1-E09A22801	Adapter AC/DC 24V/11.67A 280W with 3pin Terminal Block Plug 5.0mm Pitch
1-TPCD00005	Power Cord, 3-pin US Type, 180cm
1-TPCD00002	Power Cord, European Type, 180cm
1-TPCD00001	Power Cord, 3-pin UK Type, 180cm

### Packing List

1x RCO-6000-CML-4N2060S  
 1x Wall Mount Kit  
 1x Accessory Kit  
 1x DVI to VGA Adapter



**C&T Solution Inc.**

18F, No.176, Jianyi Road, Zhonghe Dist., New Taipei City 235603, Taiwan (R.O.C.)

Toll Free: +886-2-7731-7888 Fax: +886-2-7731-7855

Email: [info@candtsolution.com](mailto:info@candtsolution.com)

<https://www.candtsolution.com>

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660