




SBC-370

3.5" SBC Motherboard

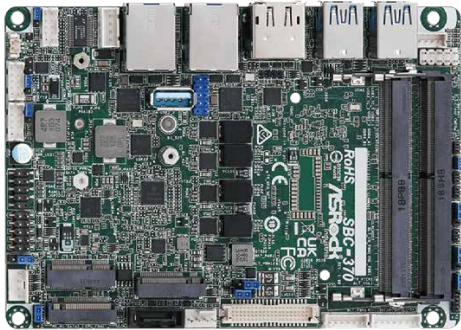

KEY FEATURES

- Intel® Alder Lake P MCP Processors
- 2 x 260-pin SO-DIMM DDR4 3200 MHz, up to 64 GB (32GB per DIMM)
- 3 x USB 3.2 Gen2, 2 x USB 2.0, 1 x M.2 Key M, 1 x M.2 Key E, 1 x M.2 Key B, 3 x COM, 1 x SATA3, 1 x PCIe x1
- 2 x Intel 2.5 Gigabit LAN
- Support Quad display, 1 x HDMI2.0b, 1 x LVDS or eDP, 3 x DP 1.4a (2 from Type-C)
- TPM2.0 on board IC
- Supports Intel® vPro, AMT (SBC-370P/SBC-370M), VMD RAID 0/1
- 12~36V DC-In PWR

SPECIFICATIONS

Form Factor

Dimensions	3.5" SBC (5.8-in x 4-in x 0.94-in, 14.7 cm x 10.2 cm x 2.40 cm)
------------	--

Processor System

CPU	Intel® 12th Gen Alder Lake-P MCP Processors SBC-370P (i7-1265UE, 2P+8E) SBC-370M (i5-1245UE, 2P+8E) SBC-370V (i3-1215UE, 2P+4E)
Chipset	MCP
BIOS	AMI SPI 256 Mbit

Memory

Technology	Dual Channel DDR4 3200 MHz
Capacity	64GB (32GB per DIMM)
Socket	2 x 260-pin SO-DIMM

Graphics

Controller	Intel® Iris® Xe Graphics
HDMI	HDMI 2.0b Max resolution up to 4096 x 2160@60Hz
DisplayPort	DP 1.4a Max resolution up to 4096 x 2160@60Hz
LVDS	Dual channel 24 bit up to 1920 x 1200@60Hz (Connector shared with eDP)
eDP	Max resolution up to 1920 x 1080@60Hz (Connector shared with LVDS)
MultiDisplay	Quad display (Included 2 output from Type-C)

Expansion Slot

PCIe	1 x PCIe x1 Gen3
M.2	1 x M.2 (Key E, 2230) with PCIe x1 and USB 2.0 for Wireless 1 x M.2 (Key B, 3042/3052) with PCIe x1 or SATA3 and USB3.2 and USB2.0 and SIM for 4G/5G
SIM Socket	1 x SIM socket connected to M.2 key B

Audio

Interface	Realtek ALC233 HD, High Definition Audio. Line-out, Mic-in
-----------	--

Ethernet

Controller/ Speed	SBC-370P/SBC-370M LAN1: Intel® I225LM with 10/100/1000/2500 Mbps, supports AMT/vPro LAN2: Intel® I225LM with 10/100/1000/2500 Mbps SBC-370V LAN1: Intel® I225LM with 10/100/1000/2500 Mbps LAN2: Intel® I225LM with 10/100/1000/2500 Mbps
Connector	2 x RJ-45

Rear I/O

HDMI	1 x HDMI2.0b
DisplayPort	1 x DP1.4++
Ethernet	2 x 2.5 Gigabit LAN
USB	2 x USB 3.2 Gen2 2 x USB 3.2 Gen2x2 (20G) (Type-C, Support DP1.4a display output)

Internal Connector

USB	1 x USB 3.2 Gen2 2 x USB 2.0 (1x2.54 pitch header)
COM	COM1, COM4, COM3 (RS-232/422/485)
GPIO	4 x GPI, 4 x GPO
TPM	TPM 2.0 onboard IC
LVDS	1 (Connector with LVDS/eDP signal, switch by BIOS)
SATA PWR Output	1
Speaker Header	1

Storage

M.2	1 x M.2 (Key M, 2242/2260/2280) with PCIe4 for SSD
SATA	1 x SATA3 (6Gb/s)
RAID	Intel® VMD RAID 0/1 ***supported by PCIe interface PCIe interface: M.2 Key B+ M.2 Key M

Watchdog Timer

Output	From Super I/O to drag RESETCON#
Interval	256 Segments, 0, 1, 2, ...255sec

Power Requirements

Input PWR	12~36V DC-In with 4-pin wafer PWR cable or DC Jack
Power On	AT/ATX Supported - AT : Directly PWR on as power input ready - ATX : Press button to PWR on after power input ready

Environment

Operating Temp	-20°C ~ 70°C
Storage Temp	-40°C ~ 85°C
Operating Humidity	5% ~ 90%
Storage Humidity	5% ~ 90%

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660