

HPS-621U4A

Single 1st/2nd Generation Intel® Xeon® Scalable Processor with Intel® C621 Chipset, 1300W, 4x RJ-45, IPMI2.0 Workstation



Features

- 19" 4U Chassis
- 430mm (W) x 174.8mm (H) x 528mm (D)
- 1 x 1300W PS2 ATX PSU
- 3 x Front accessible 2.5" storage bays
- Intel FCLGA3647 Socket supports 1st and 2nd Generation Intel® Xeon® Scalable Processors (Max. TDP at 150W)
- Intel® C621 Chipset
- 6 x DDR4 2933/ 2666/ 2400/ 2133 MHz RDIMM/ LRDIMM up to 768GB
- IPMI 2.0 with AST 2500 BMC controller onboard
- 4 x Intel I210AT 1GbE controllers



1st/2nd Gen. Intel® Xeon® Scalable Processor



6 x DDR4 RDIMM 2933/2666/ 2400/2133MHz



IPMI 2.0 Supported



PCIe Gen3 Multiple Expansion

Specifications

System Information

Processor	Intel FCLGA3647 Socket supports 1st and 2nd Generation Intel® Xeon® Scalable Processors (Max. TDP at 150W)
Platform Controller Hub	Intel® C621 Chipset
System Memory	6 x DDR4 2933/ 2666/ 2400/ 2133 MHz RDIMM/ LRDIMM up to 768GB
BIOS	AMI UEFI BIOS
Watchdog Timer	System reset event 0 - 6553 seconds
H/W Status Monitor	CPU temperature Fan speed and voltage monitoring Fan speed control Case open detection
TPM	TPM 2.0 onboard
IPMI	IPMI 2.0 with AST 2500 BMC controller onboard
SBC	HPM-621UA

Front I/O

USB	2 x USB 3.2 Gen1 ports
Power Button	1 x Power button
Reset Button	1 x Reset button
LED Indicator	1 x Power status indicator 1 x Disk activity indicator 1 x Network activity indicator

Rear I/O

USB	4 x USB 3.2 Gen1 ports
COM Port	1 x RS232 port (Bracket shares with VGA port, RS232 on the top)
VGA	1 x VGA port (Bracket shares with Serial port, VGA on the bottom)
RJ-45	4 x RJ45 (LAN1 shares IPMI port)

Display

Graphic Chipset	AST 2500 BMC controller
Resolution	1 x VGA port VGA: 1920 x 1200 @ 60Hz 32bpp

Power Requirement

Power Supply Unit	1 x 1300W PS2 ATX PSU
--------------------------	-----------------------

Expansion

Expansion	1 x PCI 3.0 slot, 3 x PCIe Gen3 x16 slots or 6 x PCIe Gen3 x8 slots Slot 1, PCI 3.0 Slot 2, PCIe 3.0 x8 Slot 3, PCIe 3.0 x16 (x16 will switch to x8 automatically when Slot 2 is used) Slot 4, PCIe 3.0 x8 Slot 5, PCIe 3.0 x16 (x16 will switch to x8 automatically when Slot 4 is used) Slot 6, PCIe 3.0 x8 Slot 7, PCIe 3.0 x16 (Slot 7 is the slot closest to CPU, x16 will switch to x8 automatically when Slot 6 is used)
------------------	--

Storage

M.2	1 x M.2 M-Key PCIe 3.0 x4 NVMe SSD, 2242/2260/2280 form factor
2.5 Drive Bay	3 x Front accessible 2.5" storage bays

Ethernet

LAN Chipset	4 x Intel I210AT 1GbE controllers
LAN Port	4 x RJ45 (LAN1 shares IPMI port)

Mechanical & Environmental

Operating Temp.	0 - 40°C (L6 system)
Storage Temp.	-40°C 24hrs IEC60068-2-1 Cold test Test: Ab 70°C/ RH95% 24hrs IEC 60068-2-3 Test: Ca
Operating Humidity	40°C @95% Relative Humidity, Non-condensing
Weight	19KG
Dimension (W x L x D)	19" 4U Chassis 430mm (W) x 174.8mm (H) x 650mm (D) 482.6mm (W) x 174.8mm (H) x 650mm (D) with ear mount


Software Support

OS	Windows 10 IoT Enterprise Windows Server 2016 Windows Server 2019 Ubuntu 18.04 LTS or Later
-----------	--

HPS-621U4A

Single 1st/2nd Generation Intel® Xeon® Scalable Processor with Intel® C621 Chipset, 1300W, 4x RJ-45, IPMI2.0 Workstation

Mechanical Drawing

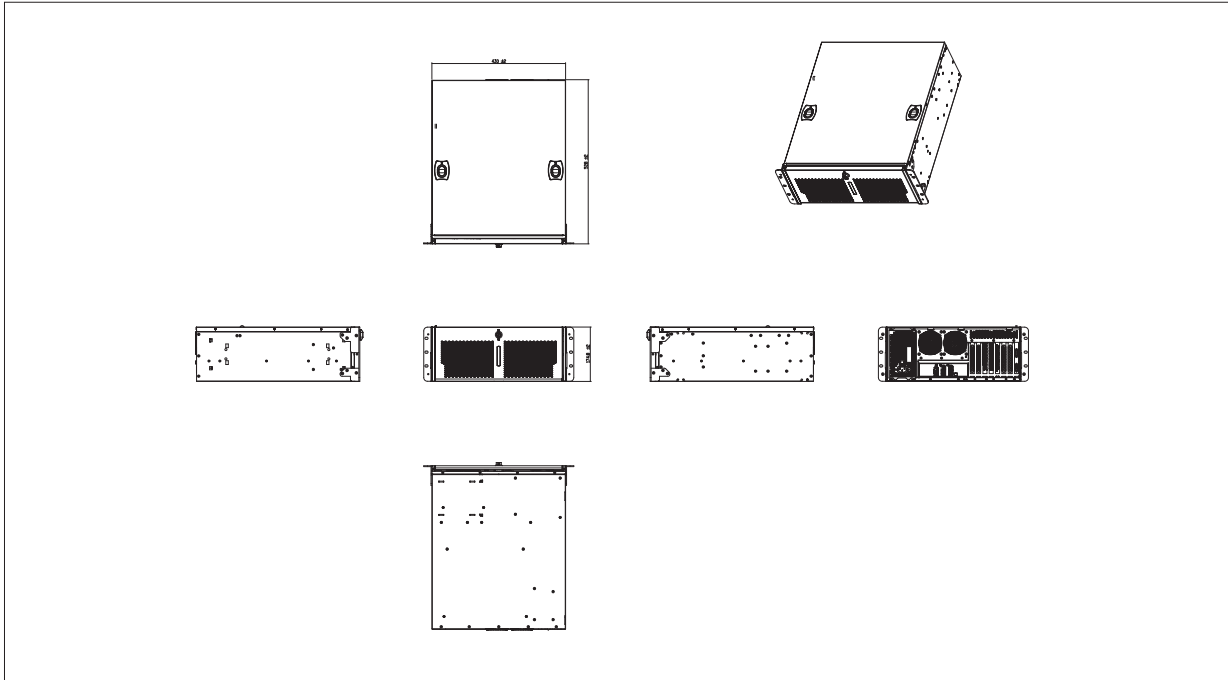

Ordering Information

Model Name	P/N	CPU	Chipset	Memory	PCIe Slot	10GbE/2.5GbE/1GbE	USB 3.2 Gen2/USB 3.2 Gen1/USB 2.0	2.5" Drive Bay	PSU
HPS-621U4A	HPS-621U4AD-A1R	1	C621	6	7	0/0/4	0/6/0	3	1300W PS2 ATX

Packing List

Item	P/N	Quantity
L6 19" 4U Rackmount w/HPM-621UAA/1300W	HPS-621U4AD-A1R	1


Optional Items

Item	P/N
CPU Cooler for LGA3647 4U	BCC-FAN-364-01R
US Power Cord 1.8M	E170P060390R
EU Power Cord 1.8M	E1702031000R
UK Power Cord 1.8M	E170P060380R
JP Power Cord 1.8M	E170P060410R

HPS-621U4A

Single 1st/2nd Generation Intel® Xeon® Scalable Processor with Intel® C621 Chipset, 1300W, 4x RJ-45, IPMI2.0 Workstation

I/O Overview

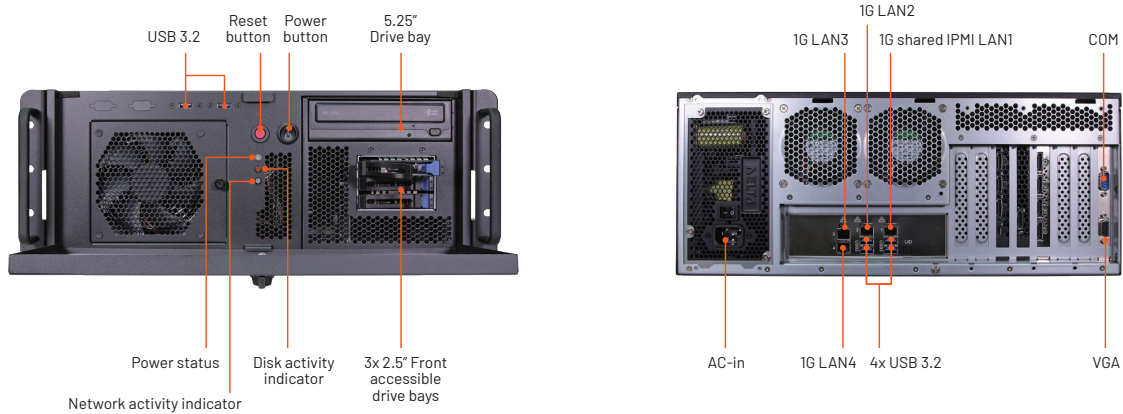

CPU Support List (HPC Only)

SKU	Launch Date	# of Cores	# of Threads	Processor Base Frequency	Max Turbo Frequency	TDP (W)
Intel® Xeon® Bronze 3106	Q3'17	8	8	1.70 GHz	NA	85
Intel® Xeon® Silver 4109T	Q3'17	8	16	2.00 GHz	3.00 GHz	70
Intel® Xeon® Silver 4110	Q3'17	8	16	2.10 GHz	3.00 GHz	85
Intel® Xeon® Silver 4114T	Q3'17	10	20	2.20 GHz	3.00 GHz	85
Intel® Xeon® Silver 4116	Q3'17	12	24	2.10 GHz	3.00 GHz	85
Intel® Xeon® Silver 4116T	Q3'17	12	24	2.10 GHz	3.00 GHz	85
Intel® Xeon® Gold 5118	Q3'17	12	24	2.30 GHz	3.20 GHz	105
Intel® Xeon® Gold 5119T	Q3'17	14	28	1.90 GHz	3.20 GHz	85
Intel® Xeon® Gold 5120T	Q3'17	14	28	2.20 GHz	3.20 GHz	105
Intel® Xeon® Gold 6126T	Q3'17	12	24	2.60 GHz	3.70 GHz	125
Intel® Xeon® Gold 6126	Q3'17	12	24	2.60 GHz	3.70 GHz	125
Intel® Xeon® Gold 6130T	Q3'17	16	32	2.10 GHz	3.70 GHz	125
Intel® Xeon® Gold 6130	Q3'17	16	32	2.10 GHz	3.70 GHz	125
Intel® Xeon® Gold 6138	Q3'17	20	40	2.00 GHz	3.70 GHz	125
Intel® Xeon® Silver 4209T	Q2'19	8	16	2.20 GHz	3.20 GHz	70
Intel® Xeon® Silver 4210	Q2'19	10	20	2.20 GHz	3.20 GHz	85
Intel® Xeon® Silver 4215	Q2'19	8	16	2.50 GHz	3.50 GHz	85
Intel® Xeon® Silver 4214	Q2'19	12	24	2.20 GHz	3.20 GHz	85
Intel® Xeon® Silver 4216	Q2'19	16	32	2.10 GHz	3.20 GHz	100
Intel® Xeon® Gold 5215	Q2'19	10	20	2.50 GHz	3.40 GHz	85
Intel® Xeon® Gold 5218T	Q2'19	16	32	2.10 GHz	3.80 GHz	105
Intel® Xeon® Gold 6226	Q2'19	12	24	2.70 GHz	3.70 GHz	125
Intel® Xeon® Gold 6230	Q2'19	20	40	2.10 GHz	3.90 GHz	125
Intel® Xeon® Gold 6238T	Q2'19	22	44	1.90 GHz	3.70 GHz	125

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660