


# NISE 3600CE

6/7/8/9th Gen Intel® Core™ i7/i5/i3  
Fanless System with Expansion

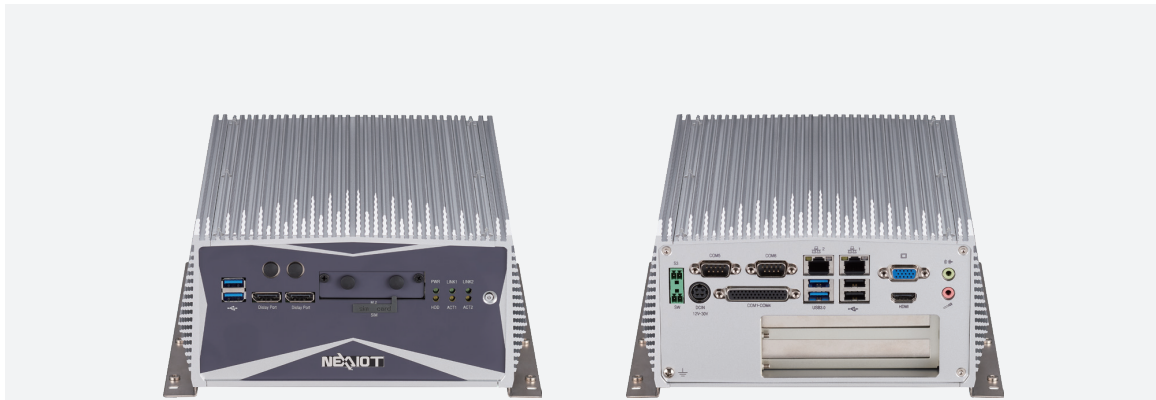

## Main Features

- Support 6/7/8/9th Gen Intel® Core™ i7/i5/i3 socket type processor
- Intel® H310C PCH
- Support 1 x 2.5" SATA HDD / SSD
- 1 x VGA, 1 x HDMI and 2 x display port with independent display support
- Dual Intel® GbE LAN ports; support WoL, teaming and PXE
- 4 x USB 3.0, 2 x USB 2.0, 5 x RS232 and 1 x RS232/422/485
- 2 x Internal mini-PCIe socket support optional Wi-Fi or 4G module
- 1 x External M.2 3042 Key B & 2 x mSATA
- 1 x SIM card socket
- Support +12V to 30VDC input; support ATX power mode
- One PCIe x4 expansion
- Support Windows 7 & Windows 10 64-bit

## Product Overview

Integrated with 6/7/8/9th Gen Intel® Core™ i7/i5/i3 and H310C PCH platform, NISE series evolve to a new generation called NISE 3600C series. It is not only sustained its good reputation on quality and user friendly features, but also innovated its mechanical design.

With computing and graphic performance enhancement, NISE 3600C series supports 2 x display port, 1 x VGA port and 1 x HDMI port to fulfill the graphic intensive or computing oriented applications, including Auto Optical Inspection, Machinery Automation, ePolice infotainment, surveillance or image processing equipment and healthcare industry. In addition, NISE 3600C series offers 2 x USB 3.0 and 4 x USB 2.0, greater expansion capability with 2 x Intel® GbE LAN ports, 6 x COM ports, and 1 x M.2 3042 Key B socket for front accessible availability. NISE 3600C series is sufficient to support wide range of DC input from +12 to 30V and ATX power; it is a new generation to meet most application requirements.

## Specifications

### CPU Support

- Support 6/7/8/9th Gen Intel® Core™ i7/i5/i3 socket type processor

### Main Memory

- 2 x DDR4 2133/2400/2666 SO-DIMM socket, support up to 32GB

### Display Option

- Dual independent display
  - VGA and HDMI
  - Display port and VGA
  - Display port and HDMI
  - Display port and display port

### I/O Interface-Front

- ATX power on/off switch
- HDD access/power status LEDs
- 2 x USB 3.0 ports
- 2 x Display port (can be converted to DVI-D or HDMI via active cables)
- 4 x Antenna holes
- 1 x External M.2 3042 Key B & 2 x mSATA (via 2 x mini-PCIe socket)
- 1 x SIM card socket (for mini card 2)

### I/O Interface-Rear

- 1 x DB44 serial port for 4 x COM ports
  - COM1/3/4 (RS232)
  - COM2 (RS232/422/485)
- 2 x DB9 for COM5 (RS232) & COM6 (RS232)
- 2 x USB 3.0 ports (900mA per port)
- 2 x USB 2.0 ports (500mA per port)
- 1 x VGA port
- 1 x HDMI port
- 2 x Intel® I210-AT GbE LAN ports; support WoL, teaming and PXE
- 1 x MIC-in and 1 x Line-out
- 1 x 4-pin remote power on/off switch
- +12V to 30V DC input

### Expansion Slot

- One PCIe x4 expansion slot
  - Add-on card length: 169mm max.
  - Power consumption: 10W/slot max
- 1 x Internal mini-PCIe socket support optional Wi-Fi/4G LTE


### Power Requirements

- AT/ATX power mode (default: ATX power mode)

www.nexaiot.com



## Dimension Drawing

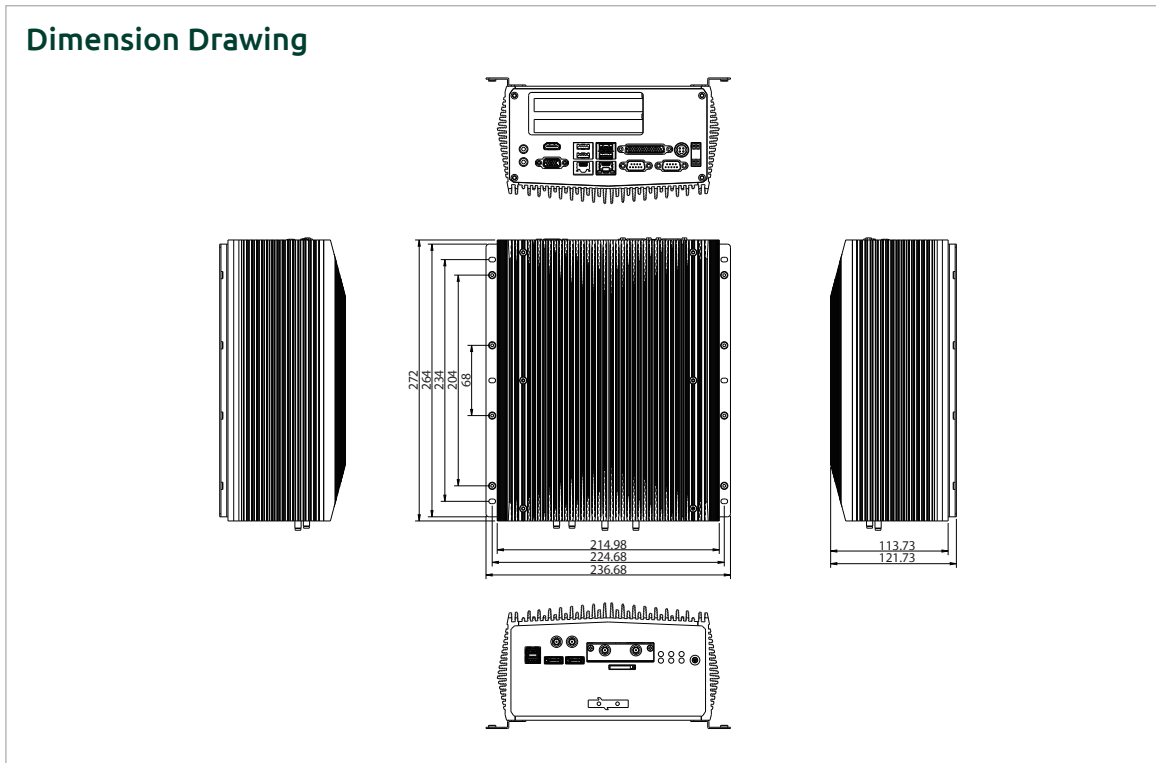

- Power input: +12 to +30V DC
- Power adapter: optional AC to DC power adapter (24V DC, 120W)

### Dimensions

- 215 mm(W) x 272mm (D) x 93mm (H) without wall mount bracket (8.5" x 10.7" x 4.5")

### Construction

- Aluminum and metal chassis with fanless design

### Environment

- Operating temperature: ambient with air flow: -5°C to 50° (according to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14)
- Storage temperature: -20°C to 80°C
- Relative humidity: 10% to 95% (non-condensing)
- Shock protection:
  - HDD: 20G, half sine, 11ms, IEC60068-2-2
  - M.2: 50G, half sine, 11ms, IEC60068-2-27
- Vibration protection with HDD condition:
  - Random: 0.5Grms@5~500 Hz, IEC60068-2-64
  - Sinusoidal: 0.5Grms@5~500 Hz, IEC60068-2-6

- Vibration protection with SSD & M.2 condition:
  - Random: 2Grms@5~500 Hz, IEC60068-2-64
  - Sinusoidal: 2Grms@5~500 Hz, IEC60068-2-6

### Certifications

- CE approval- EN61000-6-2- EN61000-6-4
- FCC Class A

### OS Support

- Windows 7
- Windows 10 64-bit

## Ordering Information

### Barebone

- **NISE 3600CE (P/N: 10J03600C01XE)**  
6/7/8/9th Gen Intel® Core™ i7/i5/i3 fanless system with one PCIe x4 expansion
- **24V, 120W AC to DC power adapter w/o power cord (P/N: 7400120031X00)**

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660