

## CV-W115/M1101 Series

15.6" TFT-LCD WXGA Touch Monitor with Resistive 5-wire / Projected Capacitive Touch, 1x DisplayPort, 1x HDMI, 1x VGA



### MEETING ALL YOUR INDUSTRIAL MONITOR NEEDS | CV-100/M1000 Series Industrial Monitor |

#### Overview

The Cincoze CV-100/M1101 series modular industrial touch monitors are suitable for the display requirements of equipment HMI and production process visualization in harsh on-site applications. The wide selection of screen sizes and touch options are just some of the features. The patented CDS (Convertible Display System) technology makes field side maintenance easier and enables simpler upgrades in the future. The CV-100/M1101 series supports digital and analog signal inputs, including HDMI, DisplayPort and VGA. It also has a multi-language OSD and supports multiple installation methods, including panel, VESA, and rack mount, so the monitor can adapt to deployment in a variety of application scenarios.

- 15.6" TFT-LCD WXGA with Resistive 5-wire / Projected Capacitive Touch
- Designed with Aluminum Die-Casting Front Frame
- Various Video Input Interfaces: 1x VGA, 1x HDMI, 1x DisplayPort Input
- Support USB & RS-232 Interfaces for Touch Function
- OSD Control keys for Brightness Adjustment
- Convertible Display System (CDS) Supported
- True Flat IP65 Front Panel Protection
- Support Panel / VESA / Rack Mount



### Complete Range of Sizes

The CV-100/M1101 series has a comprehensive selection of screens, with various screen sizes (8.4 - 24 inches), display ratios (4:3, 5:4, and 16:9), touch methods (multi-point capacitive and single-point resistive), and brightnesses (300-500 nits) to optimally match application requirements.



### CDS Patented Technology

The patented CDS technology makes field side maintenance and future upgrades simpler and more cost-effective because a single part of the system can be replaced instead of replacing the whole thing.

Patent No. M482908

### Multiple Display Inputs

The CV-100/M1101 series has three different display inputs, including HDMI and DisplayPort digital inputs and VGA analog input.



### Rugged, Safe, and Reliable

The CV-100/M1101 series has industrial-grade protections, including wide temperature support (-20°C to 70°C) and a dust- and water-resistant IP65 front panel to face harsh operating environments. In pursuit of ever higher product safety, the CV-100/M1101 series have also undergone rigorous testing to pass UL certification for product safety.

**CV-W115 Series Specifications**


Model Name	CV-W115R	CV-W115C
<b>Display</b>		
LCD Size	• 15.6" (16:9)	
Max. Resolution	• 1366 x 768 (WXGA)	
Brightness (cd/m2)	• 400	
Contrast Ratio	• 500 : 1	
LCD Color	• 16.2M	
Pixel Pitch (mm)	• 0.252 (H) x 0.252 (V)	
Viewing Angle (H-V)	• 170 / 160	
Backlight MTBF	• 50,000 hrs (LED Backlight)	
<b>Touch Screen</b>		
Touch Type	• Resistive 5-wire	• Projected Capacitive
<b>Physical</b>		
Dimension ( W x D x H )	• 420 x 254 x 66.2 mm	
Weight Information	• 4.25 kg	
Mechanical Construction	• Die-Casting Flat Surface	
<b>Environment</b>		
Front Panel Protection	• IP 65 Compliant	
Surge Protection	• 2kV	
Operating Temperature	• 0°C to 60°C (with Industrial Grade peripherals; Ambient with air flow)	
Storage Temperature	• -20°C to 60°C	
Relative Humidity	• 80% RH @ 50°C (Non-condensing)	
EMC	• CE, UKCA, FCC, ICES-003 Class A	

**M1101 Specifications**


Model Name	M1101
<b>Graphics</b>	
HDMI-in	• 1x HDMI Connector (1920 x 1080 @60Hz)
DP-in	• 1x DisplayPort Connector (1920 x 1080 @60Hz)
VGA-in	• 1x VGA Connector (1920 x 1080 @60Hz)
<b>Audio</b>	
Audio input	• 1x Audio Line in, Phone Jack 3.5mm
<b>I/O</b>	
COM	• 1x RS-232, DB9
USB	• 1x 480Mbps USB 2.0, Type A
<b>Other Function</b>	
OSD Button	• Menu, Auto, LCD On/Off, Brightness Up, Brightness Down
Internal Speaker	• AMP 2W + 2W
Status LED Indicator	• Power LED, Standby LED
<b>Power</b>	
Power Input	• 9 - 48VDC, 3-pin Terminal Block
<b>Physical</b>	
Dimension ( W x D x H )	• 204.5 x 149 x 38.5 mm
Weight Information	• 1.2 kg
Mechanical Construction	• Extruded Aluminum with Heavy Duty Metal
Mounting	• VESA / CDS Mounting
Physical Design	• Fanless Design • Jumper-less Design
<b>Reliability &amp; Protection</b>	
Reverse Power Input Protection	• Yes
Over Voltage Protection	• Protection Range: 51~58V • Protection Type: shut down operating voltage, re-power on at the preset level to recover
Over Current Protection	• 15A
MTBF	• 1,217,359 hrs - Database: Telcordia SR-332 Issue 3, Method 1, Case 3
<b>Environment</b>	
Operating Temperature	• -20°C to 70°C * Ambient with air flow * According to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14
Storage Temperature	• -20°C to 75°C
Relative Humidity	• 95%RH @ 70°C (non-Condensing)
Shock	• Operating, 15 Grms (according to IEC60068-2-27)
Vibration	• Operating, 1.5 Grms, 5-500 Hz, 3 Axes (according to IEC60068-2-64) • Operating, 1 Grms, 10-500 Hz, 3 Axes (according to IEC60068-2-6)
EMC	• CE, UKCA, FCC, ICES-003 Class A • EN61000-6-4, EN61000-6-2 (24VDC Input Only)
Safety	• UL, cUL, CB, IEC, EN 62368-1

**CV-W115/M1101 External Layout**


Front I/O




Rear I/O

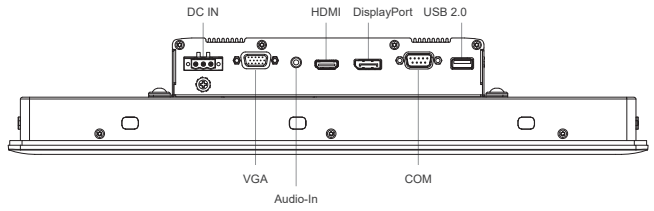


Left I/O



Right I/O

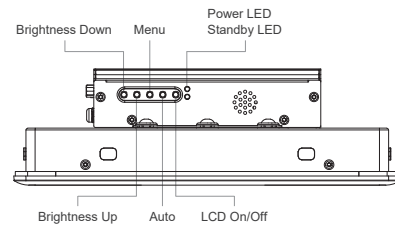

**CV-W115/M1101 Dimensions**

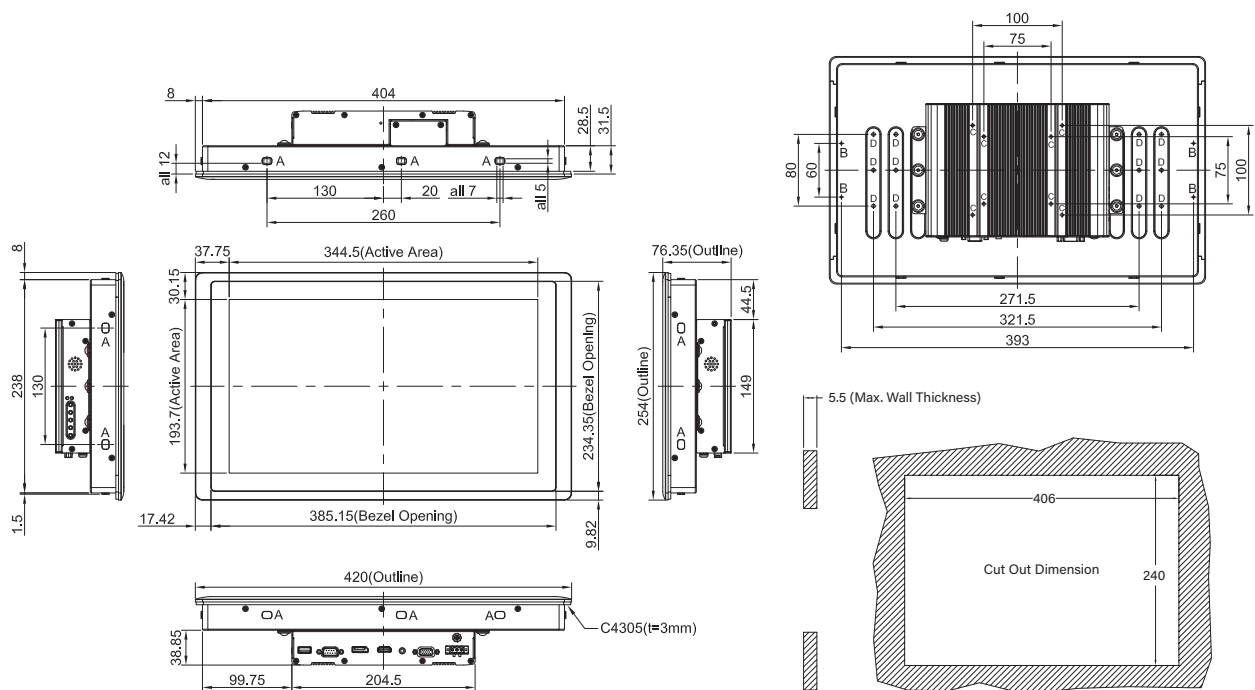

Unit: mm

**Available Models**

Model No.	Description
CV-W115R-R10/M1101-R10	15.6" TFT-LCD WXGA 16:9 Touch Monitor with Resistive 5-wire Touch, 1x DisplayPort, 1x HDMI, 1x VGA
CV-W115C-R11/M1101-R10	15.6" TFT-LCD WXGA 16:9 Touch Monitor with Projected Capacitive Touch, 1x DisplayPort, 1x HDMI, 1x VGA

**Model Configuration**

	CV-W115R	CV-W115C	M1101
CV-W115R/M1101	V	--	V
CV-W115C/M1101	--	V	V

V : Compatible

**Package Checklist**

• CV-W115/M1101 Series Touch Monitor x 1	• Panel Mounting Kit x 1
• USB Cable x 1	• Power Terminal Block Connector x 1
• VGA Cable x 1	• Screw Pack x 1

**Optional Accessories**

Model No.	Description
GST60A12-CIN1	Adapter AC/DC 12V 5A 60W, GST60A12-CIN1, wide temp(-30°C ~ +70°C)
GST120A24-CIN	Adapter AC/DC 24V 5A 120W with 3pin Terminal Block Plug and Tubes, Level VI
URM01	Universal 19" Rack Mount Kit for Industrial Panel PC & Industrial Monitor

Updated: Jul. 27, 2023

© Cincoze Co., Ltd. All Rights Reserved. Specifications subject to change without notice. All product names, logos, and brands are the property of their respective owners. All company, product and service names used in this document are for identification purposes only. The use of these names, logos, and brands does not imply endorsement.

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660