


OPS883

4th Generation Intel® Core™ i7/i5/i3 & Celeron® Processor Open Pluggable Specification (OPS) Digital Signage Player with Intel® Q87 Chipset and TPM 1.2



- | | | |
|---------------------|--------------------|----------------------|
| 1. JAE TX-25 | 6. Power Switch | 11. 2 x USB 2.0 |
| 2. Optional Antenna | 7. Reset | 12. 1 x USB 3.0 |
| 3. RS-232 | 8. HDD indicator | 13. Optional Antenna |
| 4. Ethernet | 9. Audio(Line-out) | 14. 2.5" SATA HDD |
| 5. HDMI Output | 10. Audio(Mic-in) | |

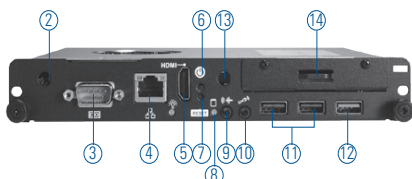

Specifications


Main System	CPU	LGA1150 socket 4th generation Intel® Core™ processor (Haswell Refresh)
	Chipset	Intel® Q87
	System Memory	1 x 204 pin DDR3-1600 SO-DIMM max. up to 8 GB
	Storage	1 x 2.5" SATA HDD tray 1 x mSATA (Option)
	Watchdog Timer	255 levels, 1-255 sec.
I/O	2 x USB 2.0	
	1 x USB 3.0	
	1 x 10/100/1000Mbps Ethernet	
	1 x HDMI with 4K Resolution	
	1 x RS-232 (COM2)	
	1 x power on/off button	
	1 x reset button	
	1 x Audio (Line-out)	
	1 x Audio (Mic-in)	
	1 x Display Port (via OPS JAE interconnector)	
	2 x USB 2.0 (via OPS JAE interconnector)	
	1 x USB 3.0 (via OPS JAE interconnector)	
	1 x Audio (Line out, via OPS JAE interconnector)	
	1 x UART (TX/RX, via OPS JAE interconnector) (COM1)	
Indicator	1 x LED for system power ON	
	1 x LED for HDD active	
WiFi	Optional Wi-Fi module	
Expansion Slot	1 x full-size PCI Express Mini card (USB+PCI Express Signal)	
Dimensions	200 mm (7.87") (W) x 119 mm (4.68") x 30 mm (1.18")	
Packing Dimension	270 mm (10.63") (W) x 197 mm (7.76") x 70mm (2.76")	
Weight (net/gross)	1 kg (2.21lb)/ 1.5 kg (3.3 lb)	
Environmental	0°C ~ +45°C (+32°F ~ +113°F) (with airflow 1.2m/s)	

Packing

1 x driver CD
1 x thermal grease
2 x M2 x 5 screw
2 x M4 x 6 screw

Features

- Intel® Open Pluggable Specification (OPS) compliance
- 4th Generation Intel® Core™ i7/i5/i3 & Celeron® processor (Haswell Refresh)
- Supports DDR3-1600 SO-DIMM max. up to 8 GB
- Supports 1 PCI Express Mini Card
- Supports TPM 1.2
- Easy installation and maintenance
- HDMI for 2nd display w/4K resolution
- Intel® AMT 9.0 supported

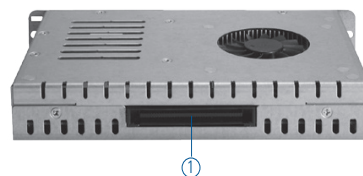

Optional OS Installation

Windows® 7, Windows® 8.1


Ordering Information

Standard	
OPS883	OPS digital signage player supports LGA1150 socket Intel® Core™ i7/i5/i3 & Celeron® processor with iAMT feature

Optional	
AX93167	OPS docking board with 4K solution

* Specifications and photos are based on options and may vary

Dimensions

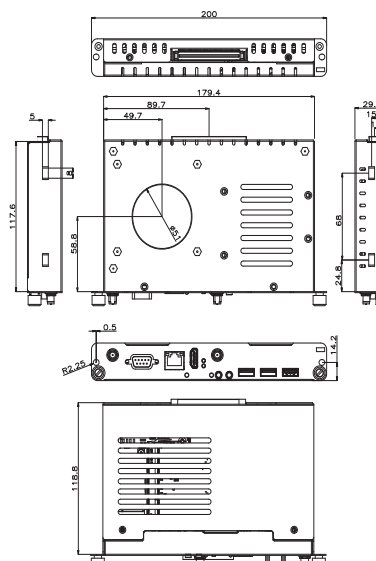

Overview

Embedded Systems

Embedded Systems for Transportation

Embedded Field Controllers

Industrial Firewall

Digital Signage Solutions

Embedded MicroBoxes

Industrial Barebone Systems

Industrial Chassis

Backplanes

Power Supplies

Peripherals & Accessories

* All specifications and photos are subject to change without notice.

axiomtek.com



© 2016 Axiomtek Co., Ltd. All rights reserved.

386

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660