



DI SERIES

DI881LT2


88" 1000 Nits Bar-type Digital Signage Display



24 / 7
OPERATION



32 : 9
ASPECT RATIO



BUILT-IN
MEDIA PLAYER



FANLESS



TRUECOLOR™
CALIBRATED

FOR MORE INFORMATION

For more information about Dynascan, visit our site at www.dynascandisplay.com. Copyright © Dynascan Technology Inc. All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.

DynaScan



V100

SPECIFICATION


MODEL	DI881LT2	
PANEL	LCD Panel Type	87.8 inches LCD
	Native Resolution	3840 x 1080 (32 : 9)
	Backlight	LED
	Default Color Temperature	D65 (6500 K)
	Brightness	1000 nits
	Color Depth	10 bits
	Contrast Ratio	3000 : 1
	Response Time (Typ.)	8 ms
	Viewing Angle (H/V)	178° / 178°
	Light Life Time (Typ.)	50,000 hrs
POWER	Blackening Defect Free	Up to 110°C (230°F)
	Panel Surface	AG Haze 1%, 3H
	Power Supply	Internal
	Rated Voltage	100-240V ~ 50/60Hz
	Power On Mode (Typ./ Max)	360 W / 580 W
	Power Saving Mode	< 1W
	Bezel Width (T/B/L/R)	5.8 / 5.8 / 4.3 / 4.3 mm
	Cabinet Color	Black
	Monitor Dimension (LxHxD)	2158.4 x 611.3 x 84.0 mm
	Monitor Weight	38.5 kg
MECHANICAL SPECS	Orientation	Portrait / Landscape
	VESA Mounting (LxH)	600 x 400 mm
	Carrying Handles	Yes
	Fanless Design	Yes
	Language	English
	Support SNMP (Up to V3.0)	Yes
	Image Retention Protection	Yes
	Ambient Light Sensor	Yes
	Power On/Off Scheduling	Yes
	Internal Temperature Sensor	Yes
OSD Menu Rotation	Yes	
USER INTERFACE	HDMI	x2 (2160P)
	DisplayPort	x1
	USB	x1 (For Internal Player), x1 (Service Port)
	SD Slot	x1
	Audio	x1
EXTERNAL CONTROL	RS-232	In x1, Out x1
	RJ-45	x1 (LAN)
INTERNAL PLAYER	Operating System	Android 7.1.2
	Processor	ARM Quad-Core Cortex-A17
	Clock Speed	1.6GHz
	Main Memory Interface	DDR3, 2G
	Graphics	Mali-T764 GPU
	Storage	Internal: 8GB eMMC Flash External: Support SD , Up to 32GB
	Multimedia	4K 10bits H265/H264 video decoders 1080P other video decoders (VC-1, MPEG-1/2/4, VP8) 1080P video encoder for H.264 and VP8
	Wi-Fi Specification	802.11 b/g/n 2412.0MHz - 2462.0MHz
	Operating Temperature	0° C ~ 40° C
	Storage Temperature	-20° C ~ 60° C
ENVIRONMENT	Humidity	10% ~ 80% RH Non-condensing
	CERTIFICATION	CE / FCC / RoHS

DIMENSIONS

Unit: mm [inch]

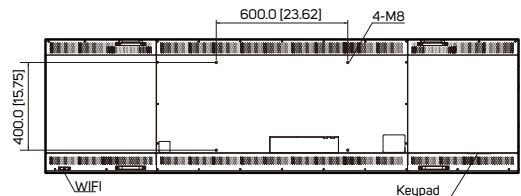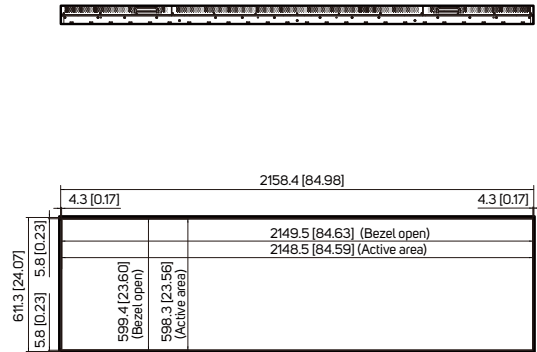

INTERFACE

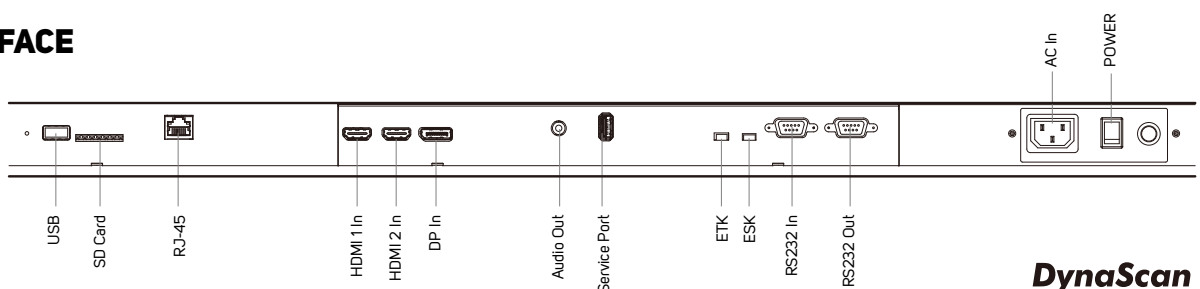

DynaScan

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660