



IN-VEHICLE COMPUTER

ACO-6000-CML

In-Vehicle Computer with LGA 1200 for Intel 10th Gen CPU & W480E PCH, 2x LAN



Features

- LGA 1200 socket for 10th Gen. Intel® CML S Processor (65W/35W TDP)
- Intel® W480E chipset
- 2x DDR4 2666/2933MHz SODIMM. Max. up to 64GB
- Triple Independent Display: 2x DisplayPort, 1x DVI-I
- 2x Intel® GbE supporting Wake-on-LAN and PXE
- 2x Full-size Mini PCIe for communication or expansion modules, 2x SIM socket
- 3x 2.5" SATA HDD Bay (1x Internal) with RAID 0, 1, 5 support
- 1x M.2 (E Key, PCIe x1, USB 2.0, 2230)
- 8x RS-232/422/485 (6x internal), 6x USB 3.2 Gen 2, 3x USB 3.2 Gen 1 (1x internal)
- 8x DI + 8x DO with isolation
- 9 to 48 or 48 to 110VDC Wide Range Power Input Supporting AT/ATX Mode
- Wide Operating Temperature -25°C to 70°C (35W/65W CPU)
- TPM 2.0 Supported
- Power ignition management



Specifications

System

Processor

Support 10th Gen Intel® CML S Processor (LGA 1200, 65W/35W TDP)

- Intel® Xeon® W-1290TE, 10 Cores, 20MB Cache, up to 4.5 GHz
- Intel® Xeon® W-1270TE, 8 Cores, 16MB Cache, up to 4.4 GHz
- Intel® Xeon® W-1250TE, 6 Cores, 12MB Cache, up to 3.8 GHz
- Intel® Core™ i9-10900E, 10 Cores, 20MB Cache, up to 4.7 GHz
- Intel® Core™ i9-10900TE, 10 Cores, 20MB Cache, up to 4.5 GHz
- Intel® Core™ i7-10700E, 8 Core, 16MB Cache, up to 4.5 GHz
- Intel® Core™ i7-10700TE, 8 Cores, 16MB cache, up to 4.4 GHz
- Intel® Core™ i5-10500T, 6 Cores, 12MB Cache, up to 4.2 GHz
- Intel® Core™ i5-10500TE, 6 Core, 12MB Cache, 3.7 GHz
- Intel® Core™ i3-10100T, 4 Cores, 6MB cache, up to 3.8 GHz
- Intel® Core™ i3-10100TE, 4 Cores, 9MB Cache, up to 3.6 GHz

System Chipset

Intel® W480E Chipset

LAN Chipset

GbE1: Intel I219 (Support Wake-on-LAN and PXE)
GbE2: Intel I210 (Support Wake-on-LAN and PXE)

Audio Codec

Realtek ALC888S

System Memory

2x 260-Pin DDR4 2666/2933MHz SODIMM.
Max. up to 64GB (ECC and Non-ECC)

Graphics

Intel® UHD Graphics 630

BIOS

AMI 256Mbit SPI BIOS

Watchdog

Software Programmable Supports 1~255 sec. System Reset

TPM

TPM 2.0

Display

Display Port

2x DisplayPort, support resolution 4096 x 2304, DP++

DVI

1x DVI-I, support resolution 1920 x 1200

Multiple Display

Triple Display

VGA

Yes (by optional split cable)

Storage

SIM Socket

2x External SIM socket (Mini PCIe attached)

SSD/HDD

1x Internal 2.5" SATA HDD/SSD Bay (support H=9mm)
2x Removable 2.5" SATA HDD/SSD Bay (support H=7mm, Hot-swappable)
Support RAID 0, 1, 5

Expansion

M.2

1x M.2 (E Key, PCIe x1, USB 2.0, 2230)

Mini PCIe

2x Full-size Mini PCIe

Expansion Modules

Occupied One Universal I/O Slot:

- 4-port GbE module with Intel® I350 Chipset, RJ-45 or M12 connector (PoE optional)
- 2-Port RJ45 10GbE with Intel X710 Chipset
- 4-Port USB with Renesas uPD720201K8 host controller (share PCIe Gen2 x1 bandwidth)
- 1x M.2 for 5G (B Key, PCIe x4, USB 3.0, 3042/3052), Including 2x SIM socket, 1x SIM switch (1x Universal Slot Only)

I/O

Audio

1x Mic-in, 1x Line-out

CAN

2x CAN 2.0 A/B 2-pin Internal header

COM

2x RS-232/422/485 ; 6x RS-232/422/485 (internal)

DIO

8 in / 8 out (Isolated)

LAN

2x RJ45

Universal I/O Bracket

2x Universal I/O Bracket (By mini PCIe interface)

USB

6x USB 3.2 Gen 2 (10 Gbps)
3x USB 3.2 Gen 1 (5 Gbps, 1x Internal)
2x USB 2.0 header (internal)

Others

- 5x WiFi Antenna Holes
- 1x Power Switch, 1x AT/ATX Switch, 1x Remote Power On/Off
- 1x PC/Car Mode Switch, 1x Delay Time Switch
- 1x Removable CMOS Battery
- 4x 4-Pin Power Connector, 1x 4-PIN FAN Connector

Operating System

Windows

Windows 10

Linux

Linux kernel

Power

Power Adapter

Optional AC/DC 24V/5A, 120W
Optional AC/DC 24V/9.2A, 220W

Power Mode

AT, ATX

Power Ignition Sensing

Power Ignition Management

Power Supply Voltage

9~48VDC
48~110VDC (Optional)

Power Connector

5-pin Terminal Block (9~48VDC)
3-pin Terminal Block (48~110VDC, Optional)

Power Protection

OVP (Over Voltage Protection);
OCP (Over Current Protection)
Reverse Protection

Environment

Operating Temperature

-25°C to 70°C (35W/65W CPU)

Storage Temperature

-30°C to 85°C

Relative Humidity

10% to 95% (non-condensing)

Certification

CE, FCC Class A,
E-Mark, EMC Conformity with EN50155 & EN50121-3-2

Vibration

With SSD: 5 Grms, 5 - 500 Hz, 0.5 hr/axis
With HDD: 1 Grms, 5 - 500 Hz, 0.5 hr/axis

Shock

With SSD: 50G, half sine, 11ms

Physical

Dimensions

240 (W) x 261 (D) x 79.2 (H) mm

Weights

3.1~3.5 kg

Construction

Extruded Aluminum with Heavy Duty Metal

Mounting Options


Wall Mounting

* For 10th Gen Intel CPUs configured to run at 65W, operating temperatures will be limited to 70°C.
** 65W CPU may experience thermal throttling depending on extreme application workloads; this is also due to an increase in the physical CPU cores from the Intel silicon (up to 10 cores). Please note, this does not indicate system malfunction or problems in the fanless design. Please consult our embedded engineers for the best configuration to match your application requirements.
*** All specifications and photos are subject to change without notice.




ACO-6000-CML

External I/O Mechanical Layout

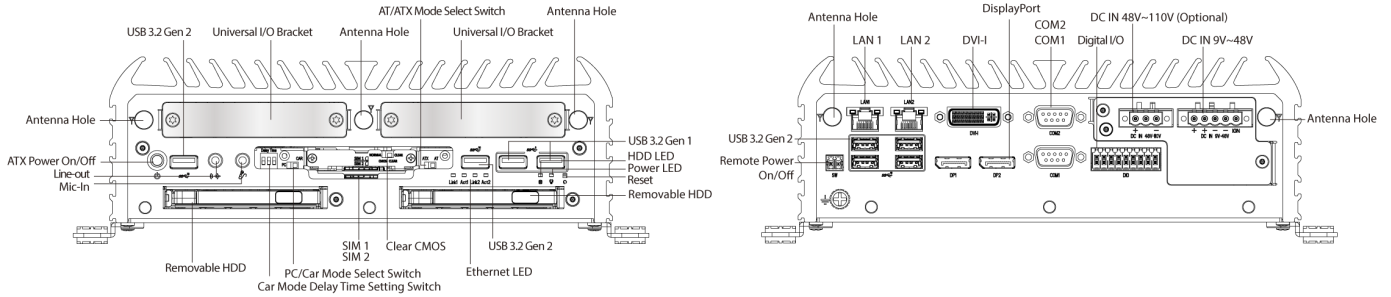


Available Modules

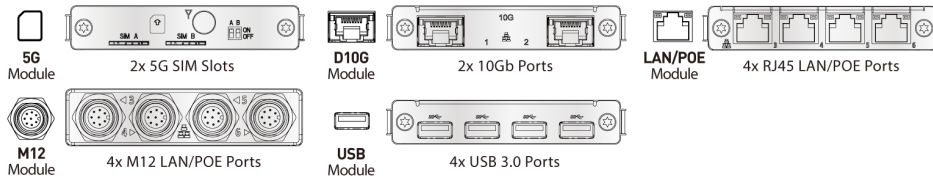

Dimension

Unit: mm

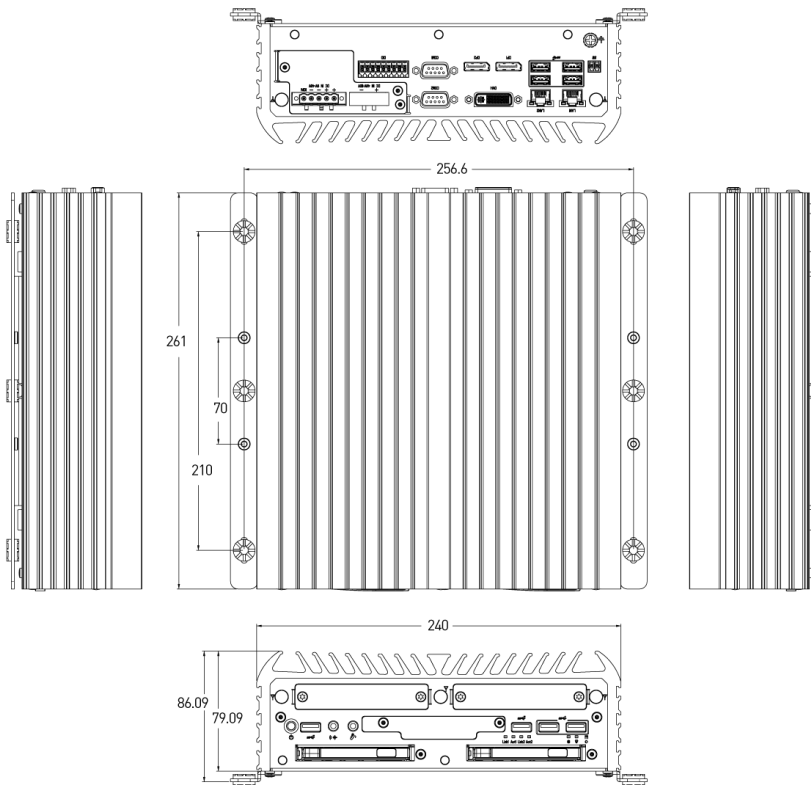



ACO-6000-CML

Available Models

Model No.	Description
ACO-6000-CML	In-Vehicle Fanless Computer with LGA 1200 for Intel 10th Gen CPU and W480E PCH, 2x LAN
ACO-6000-CML-4L	In-Vehicle Fanless Computer with LGA 1200 for Intel 10th Gen CPU and W480E PCH, 6x LAN
ACO-6000-CML-4LM12	In-Vehicle Fanless Computer with LGA 1200 for Intel 10th Gen CPU and W480E PCH, 2x LAN, 4x M12 LAN
ACO-6000-CML-8L	In-Vehicle Fanless Computer with LGA 1200 for Intel 10th Gen CPU and W480E PCH, 10x LAN
ACO-6000-CML-8LM12	In-Vehicle Fanless Computer with LGA 1200 for Intel 10th Gen CPU and W480E PCH, 2x LAN, 8x M12 LAN
ACO-6000-CML-4P	In-Vehicle Fanless Computer with LGA 1200 for Intel 10th Gen CPU and W480E PCH, 2x LAN, 4x PoE
ACO-6000-CML-4PM12	In-Vehicle Fanless Computer with LGA 1200 for Intel 10th Gen CPU and W480E PCH, 2x LAN, 4x M12 PoE
ACO-6000-CML-8P	In-Vehicle Fanless Computer with LGA 1200 for Intel 10th Gen CPU and W480E PCH, 2x LAN, 8x PoE
ACO-6000-CML-8PM12	In-Vehicle Fanless Computer with LGA 1200 for Intel 10th Gen CPU and W480E PCH, 2x LAN, 8x M12 PoE
ACO-6000-CML-D10G	In-Vehicle Fanless Computer with LGA 1200 for Intel 10th Gen CPU and W480E PCH, 2x LAN, 2x 10G LAN
ACO-6000-CML-4U3	In-Vehicle Fanless Computer with LGA 1200 for Intel 10th Gen CPU and W480E PCH, 2x LAN, 12x USB
ACO-6000-CML-8U3	In-Vehicle Fanless Computer with LGA 1200 for Intel 10th Gen CPU and W480E PCH, 2x LAN, 16x USB
ACO-6000-CML-5G	In-Vehicle Fanless Computer with LGA 1200 for Intel 10th Gen CPU and W480E PCH, 2x LAN, 1x M.2 for 5G
ACO-6000-CML-110V	In-Vehicle Fanless Computer with LGA 1200 for Intel 10th Gen CPU and W480E PCH, 2x LAN
ACO-6000-CML-4L-110V	In-Vehicle Fanless Computer with LGA 1200 for Intel 10th Gen CPU and W480E PCH, 6x LAN
ACO-6000-CML-4LM12-110V	In-Vehicle Fanless Computer with LGA 1200 for Intel 10th Gen CPU and W480E PCH, 2x LAN, 4x M12 LAN
ACO-6000-CML-8L-110V	In-Vehicle Fanless Computer with LGA 1200 for Intel 10th Gen CPU and W480E PCH, 10x LAN
ACO-6000-CML-8LM12-110V	In-Vehicle Fanless Computer with LGA 1200 for Intel 10th Gen CPU and W480E PCH, 2x LAN, 8x M12 LAN
ACO-6000-CML-4P-110V	In-Vehicle Fanless Computer with LGA 1200 for Intel 10th Gen CPU and W480E PCH, 2x LAN, 4x PoE
ACO-6000-CML-4PM12-110V	In-Vehicle Fanless Computer with LGA 1200 for Intel 10th Gen CPU and W480E PCH, 2x LAN, 4x M12 PoE
ACO-6000-CML-8P-110V	In-Vehicle Fanless Computer with LGA 1200 for Intel 10th Gen CPU and W480E PCH, 2x LAN, 8x PoE
ACO-6000-CML-8PM12-110V	In-Vehicle Fanless Computer with LGA 1200 for Intel 10th Gen CPU and W480E PCH, 2x LAN, 8x M12 PoE
ACO-6000-CML-D10G-110V	In-Vehicle Fanless Computer with LGA 1200 for Intel 10th Gen CPU and W480E PCH, 2x LAN, 2x 10G LAN
ACO-6000-CML-4U3-110V	In-Vehicle Fanless Computer with LGA 1200 for Intel 10th Gen CPU and W480E PCH, 2x LAN, 12x USB
ACO-6000-CML-8U3-110V	In-Vehicle Fanless Computer with LGA 1200 for Intel 10th Gen CPU and W480E PCH, 2x LAN, 16x USB
ACO-6000-CML-5G-110V	In-Vehicle Fanless Computer with LGA 1200 for Intel 10th Gen CPU and W480E PCH, 2x LAN, 1x M.2 for 5G

Optional Accessories

Model No.	Description
1-E09A12002	Adapter AC/DC 24V 5A 120W with 3pin Terminal Block Plug 5.0mm Pitch
1-E09A22102	Adapter AC/DC 24V 9.2A 220W with 3pin Terminal Block Plug 5.0mm Pitch
1-TPCD00002	Power Cord, European Type, 180cm
1-TPCD00001	Power Cord, 3-pin UK Type, 180cm
1-TPCD00005	Power Cord, 3-pin US Type, 180cm

Packing List

1x ACO-6000-CML Series Embedded System
 1x Wall Mount Kit
 1x Accessory Kit
 1x DVI to VGA Adapter



C&T Solution Inc.

18F, No.176, Jianyi Road, Zhonghe Dist., New Taipei City 235603, Taiwan (R.O.C.)

Toll Free: +886-2-7731-7888 Fax: +886-2-7731-7855

Email: info@candtsolution.com

<https://www.candtsolution.com>

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660