

Surveillance/ Video Analytics



# NRU-220S/ NRU-222S

NVIDIA® Jetson AGX Orin™ AI NVR for Intelligent Video Analytics

## Preliminary Key Features



- Powered by NVIDIA® Jetson AGX Orin™ SoM bundled with JetPack 5.1.1
- Rugged -25°C to 70°C fanless operation (No throttling at 65°C with 64GB AGX Orin MAXN Mode)
- 2x 2.5 Gigabit Ethernet + 4x IEEE 802.3at Gigabit PoE+ ports
- 2x front-accessible 2.5" SSD trays
- 1x M.2 2280 M key socket for NVMe SSD
- 2x mini-PCIe sockets for WiFi/ GNSS/ NVMe/ CAN modules
- 1x 3042/ 3052 M.2 B key socket for 4G/5G mobile communication
- 1x isolated RS-485 and 2x RS232 ports
- 8V to 48V wide-range DC input with built-in ignition power control

CE FC

Contact Neosys

Get Quote

### Introduction

NRU-220S series is a one-stop AI NVR real-time inference and video transcoder powered by NVIDIA® Jetson AGX Orin. Its fanless design and wide-temperature operation capability makes it ideal for stationary or mobile deployment applications.

Powered by NVIDIA® Jetson AGX Orin™ 32GB/ 64GB system-on-module (SOM), it comprises an Ampere GPU with up to 2048 CUDA cores, 64 Tensor cores, 2x NVDLA 2.0 Engines that offer a total of 275 sparse TOPS (INT8) AI inference and video transcoding capability of up to twenty-two 1080P video streams simultaneously.

NRU-220S offers four 802.3at PoE+ ports sharing 1 Gigabit bandwidth; each port can supply up to 25.5W of power to IP cameras. The additional two 2.5GbE ports is ideal for surveillance applications requiring more IP camera connections, or higher bandwidth connections to the backend. In addition to 64GB eMMC on the Orin module and an M.2 2280 NVMe socket for fast SSD read/write, NRU-220S is equipped with two front-accessible 2.5" SSD trays for storage expansion. It also has two mini-PCIe sockets for CAN/ COM/ WiFi modules and one M.2 B key socket for 4G LTE/5G NR mobile communications.

In addition to the above mentioned connectivity, the system also includes a wide range of NVIDIA AI tools, and modern deep learning frameworks. NRU-220S brings real-time video inference to the edge for surveillance, predictive maintenance, and intelligent transportation system (ITS) applications. Furthermore, with Neosys' unique damping bracket design, ignition power control, and 8-48V wide-range DC power input, NRU-220S is also ideal for in-vehicle deployment. Last but not least, NRU-220S comes with a derivative model, NRU-222S, incorporating M12 connectors for applications in shock and vibration environments that require extreme rugged connections, such as for agriculture, construction, and mining machinery.

NRU-220S series is Neosys' response to edge AI performance demands in a compact form factor with fanless wide-temperature operation.

### Specifications

	NRU-220S	NRU-222S
<b>System Core</b>		
Processor	Supporting NVIDIA® Jetson AGX Orin™ System-on-Module (SOM), comprising NVIDIA® Ampere GPU and Arm Cortex-A78AE CPU	
Memory	32GB/ 64GB LPDDR5 (AGX Orin 32GB/ 64GB) @ 3200 MHz on SOM	
eMMC	64GB eMMC 5.1 on SOM	
<b>Panel I/O Interface</b>		
Ethernet Port	6x RJ45 with screw-lock	6x M12 X-coded 8-pin
PoE Capability	Port 1, Port 2: 2.5 Gigabit Ethernet ports by Intel® I225 Port 3 - Port 6: Gigabit ports, share 1 Gbps total bandwidth	
USB	1x USB 3.2 Gen2 port 2x USB 2.0 ports 1x USB Type C (Debug Only)	
Video Port	1x DisplayPort, supporting 3840x2160 at 60Hz	
Serial Port	1x isolated RS-485 port and 2x RS-232 ports	
CAN bus	2x CAN 2.0 ports	
Isolated DIO	4-CH isolated DI and 4-CH isolated DO	
<b>Internal I/O Interface</b>		
Mini PCI Express	1x full-size mini PCI Express socket (PCIe + USB 2.0) for WiFi 6 or CAN 1x full-size mini PCI Express socket (USB 2.0) for GNSS or 4G LTE	
M.2	1x M.2 3042/3052 B key (USB 3.1 Gen 1 + USB 2.0) for LTE/5G module with dual micro SIM support	
<b>Storage</b>		
SATA HDD	2x front-accessible 2.5" 7mm SSD	
M.2 NVMe	1x M.2 2280 M key NVMe socket (PCIe Gen4x4) for NVMe SSD	
<b>Power Supply</b>		
DC Input	1x 3-pin pluggable terminal block for 8V to 48V DC input and ignition power control (IGN/ GND/ V+)	1x M12 A-coded 5-pin for 8V to 48V DC input and ignition power control (IGN/ GND/ V+)*
<b>Mechanical</b>		
System LED	PWR: System carrier board power status OS: Jetson OS boot status IGN: Ignition power signal	
Dimension	230 mm (W) x 173 mm (D) x 66 mm (H)	
Weight	2.6 kg (excluding the damping bracket)	
Mounting	Wall-mount with the damping bracket	
<b>Environmental</b>		
Operating Temperature	-25°C ~ 70°C with passive cooling (30W TDP mode)**	
Storage Temperature	-40°C ~ 85°C	
Humidity	10% ~ 90%, non-condensing	
Vibration	Operating, MIL-STD-810H, Method 514.8, Category 4	IEC61373:2010, Category 1, Class B Body Mounted (part of EN 50155)
Shock	Operating, MIL-STD-810H, Method 516.8, Procedure I	IEC61373:2010, Category 1, Class B Body Mounted (part of EN 50155)
EMC	CE/ FCC Class A, according to EN 55032 & EN 55035 EN 50121-3 (EN 50155:2017, Clause 13.4.8)	CE/ FCC Class A, according to EN 55032 & EN 55035 EN 50121-3 (EN 50155:2017, Clause 13.4.8)


\* Due to the M12 DC input current limit, the allowable DC input range of the NRU-222S varies based on the system load: System load under 60W, the required DC input range is 8V to 48V  
System load between 60W to 160W, the required DC input range is 20V to 48V  
\*\* For sub-zero and over 60°C operating temperature, a wide temperature HDD or Solid State Disk (SSD) is required.



NRU-220S/ NRU-222S Series

**Appearance**

**NRU-220S**

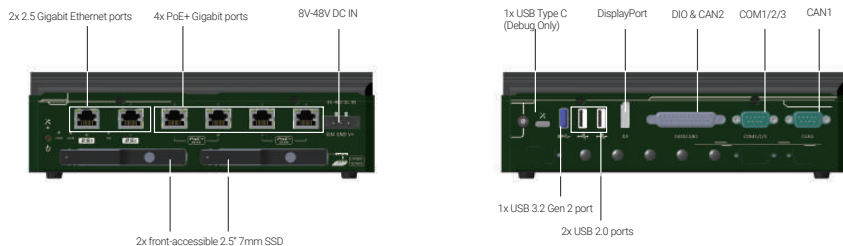

**Dimensions**



**Ordering Information**

Model No.	Product Description
NRU-220S-JAO32	NVIDIA® Jetson AGX Orin™ (32GB) AI NVR for Intelligent Video Analytics with RJ45 Ethernet
NRU-220S-JAO64	NVIDIA® Jetson AGX Orin™ (64GB) AI NVR for Intelligent Video Analytics with RJ45 Ethernet

**Optional Accessories**


PA-160W-OW	160W AC-DC power adapter 20V/8A; 18AWG/120cm; cord end terminals for terminal block, operating temperature: -30 to 70°C.
PA-120W-OW	120W AC/DC power adapter 20V/6A; 18AWG/120cm; cord end terminals for terminal block, operating temperature: -30 to 70°C.
AccsyBx-FAN-NRU-100	Fan kit with 92mm x 92mm fan for NRU-220S series

All specifications and photos are subject to change without prior notice


NRU-220S/ NRU-222S Series

**Appearance**

**NRU-222S**

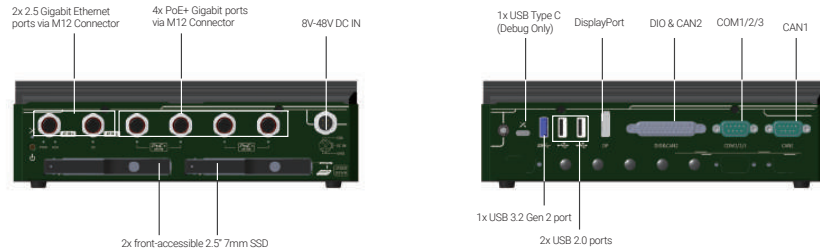

**Dimensions**

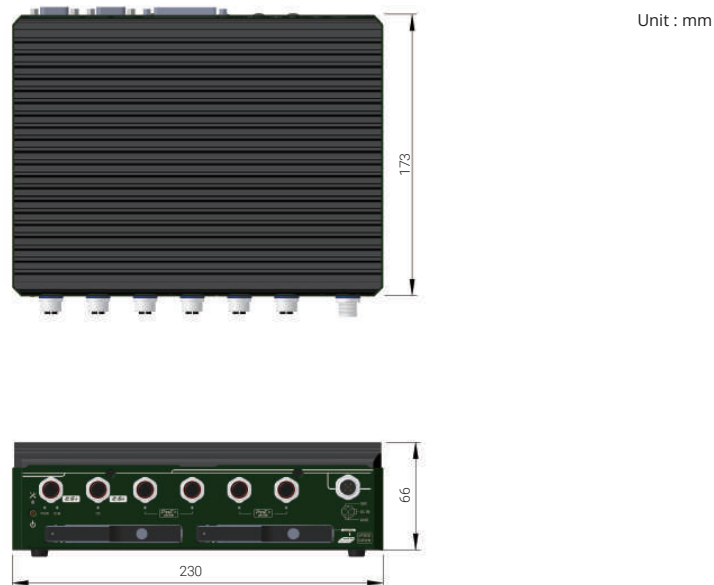

**Ordering Information**

Model No.	Product Description
NRU-222S-JA032	NVIDIA® Jetson AGX Orin™ (32GB) AI NVR for Intelligent Video Analytics with M12 Ethernet
NRU-222S-JA064	NVIDIA® Jetson AGX Orin™ (64GB) AI NVR for Intelligent Video Analytics with M12 Ethernet

**Optional Accessories**

PA-160W-OW	160W AC-DC power adapter 20V/8A; 18AWG/120cm; cord end terminals for terminal block, operating temperature: -30 to 70°C.
PA-120W-OW	120W AC/DC power adapter 20V/6A; 18AWG/120cm; cord end terminals for terminal block, operating temperature: -30 to 70°C.
AccsyBx-FAN-NRU-100	Fan kit with 92mm x 92mm fan for NRU-220S series

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660