

In-vehicle Computing



# NRU-51V Series

Rugged NVIDIA® Jetson Xavier™ NX GMSL2 Camera Sensor Hub for Autonomous Vehicles and Teleoperation



## Key Features

- Powered by NVIDIA® Jetson Xavier™ NX SOM bundled with JetPack 4.6.1
- Rugged -25°C to 70°C fanless operation
- Support 4x GMSL2 automotive cameras via FAKRA Z connectors
- 1x 10GBASE-T 10Gb and 1x 1GBASE-T 1Gb Ethernet port
- 2x mini-PCIe sockets for WiFi/ GNSS/ NVMe/ CAN modules
- 1x M.2 3042/ 3052 B key socket for 4G/ 5G mobile communication
- 1x isolated CAN, 1x configurable RS232/ 422/ 485 port, and 1x GPS PPS input
- 8V to 35V wide-range DC input with built-in ignition power control

Contact Neosys

Get Quote

Preliminary

## Introduction

NRU-51V is a rugged Jetson Xavier™ NX computer supporting GMSL2 cameras that can act either as a sensor hub or a perception unit for ADAS, teleoperation, autonomous mobile robots, and autonomous vehicles.

By supporting GMSL2 automotive cameras, they enable NRU-51V with greater vision capability by taking advantage of advanced features such as IP67 waterproof, high dynamic range (120dB HDR), auto white balance (AWB), and LED flicker mitigation (LFM). NRU-51V can obtain high-quality images with minimal latency regardless of lighting conditions, from bright sunny days to pitch-black nights. Moreover, it has a unique synchronization mechanism capable of acquiring images from four GMSL2 cameras simultaneously within microseconds channel-to-channel skew. It can further accept GPS PPS signal to align image data with LIDAR or synchronize cameras on other systems.

Thanks to the great power efficiency of NVIDIA® Jetson Xavier™ NX SOM, NRU-51V delivers 21 TOPS inference performance in its 15W power package. Users can transfer raw camera images through its built-in 10GBASE-T Ethernet to another GPU server for perception processing, but also leverage its significant TOPS for real-time object or ROI detection. For teleoperation applications, users can utilize its hardware H.264/265 video codec, to encode video streams from four GMSL2 cameras in real-time and transmit the live video feed to a driver at a remote location via 5G telecommunication with minimum latency.


The combination of GMSL2 interface and Jetson Xavier™ NX makes NRU-51V much more than just a simple edge AI computer. With greater vision brought by automotive cameras plus I/O interfaces such as 10GbE, CAN 2.0, and M.2 for 5G broadband, NRU-51V plays a central role in a moving platform, as a sensor hub for ADAS, a perception unit for AGV/ AMR, or a teleoperation controller for off-highway vehicles.

## Specifications


System Core		Power Supply	
Processor	NVIDIA® Jetson Xavier™ NX system-on-module (SOM), comprising NVIDIA® Volta GPU and Carmel CPU	DC Input	1x 3-pin pluggable terminal block for 8V to 35V DC input and ignition power control (V+/ GND/ IGN)
Memory	8GB/ 16GB LPDDR4x (Xavier NX 8GB/ 16GB) @ 1600/ 1866 MHz on SOM (15W/ 20W TDP mode)	Mechanical	
eMMC	16GB eMMC 5.1 on SOM	Dimension	173 mm (W) x 144 mm (D) x 60 mm (H)
Panel I/O Interface		Weight	1.4 kg
GMSL2 Camera	4x GMSL2 FAKRA Z connectors, supporting 4x 1920x1080 @ 30 FPS camera input	Mounting	Wall-mount bracket (optional)
Ethernet Port	1x 10GBASE-T 10GbE port with screw-lock 1x 1GBASE-T 1GbE port with screw-lock	Environmental	
USB	2x USB 3.1 Gen1 ports (total 5 Gbps shared with M.2 B key) 1x micro USB (OTG only)	Operating Temperature	-25°C ~ 70°C with passive cooling (15W TDP mode) *
Video Port	1x DisplayPort, supporting 3840x2160 at 60Hz	Storage Temperature	-40°C ~ 85°C
Serial Port	1x hardware configurable RS-232/422/485 port	Humidity	10% ~ 90%, non-condensing
CAN Bus	1x isolated CAN 2.0 port	Vibration	Operating, MIL-STD-810G, Method 514.7, Category 4 (pending)
Isolated DIO	1x GPS PPS input, 3-CH isolated DI and 4-CH isolated DO	Shock	Operating, MIL-STD-810G, Method 516.7, Procedure I (pending)
Micro SD	1x front-accessible microSD card slot	EMC	CE/FCC Class A, according to EN 55032 & EN 55035 (pending)
Ground Terminal	1x M4 ground terminal for chassis ESD shielding	* For sub-zero and over 60°C operating temperature, a wide temperature SD card / NVMe is required.	
Internal I/O Interface			
Mini PCI Express	1x full-size mini PCI Express socket (PCIe + USB 2.0) for WIFI, NVMe storage 1x full-size mini PCI Express socket (USB 2.0) for GNSS, V2X, or CAN		
M.2	1x 3042/ 3052 M.2 B key (USB 3.1 Gen 1 + USB 2.0) for 4G/5G module with dual SIM support (1x front-accessible, 1x internal)		

NRU-51V Series

## Appearance

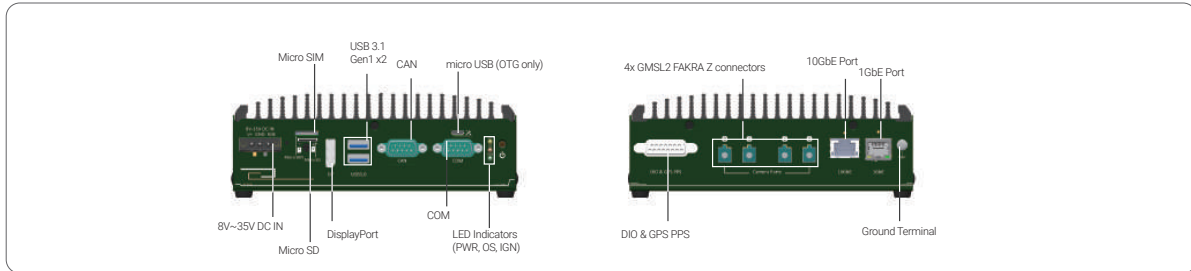

## Dimensions

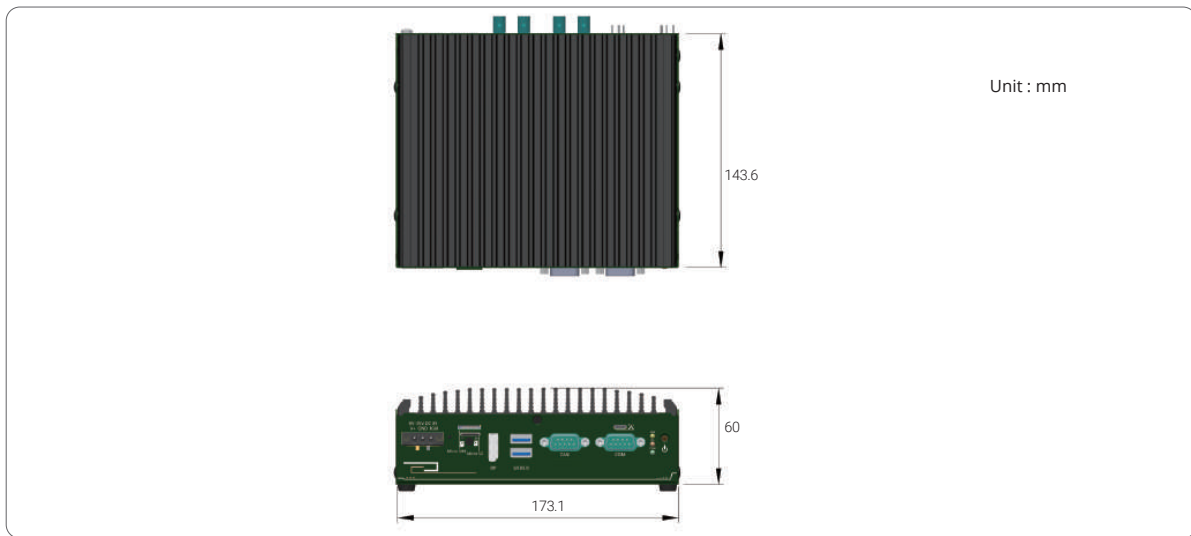

## Ordering Information

Model No.	Product Description
NRU-51V-8GB	Rugged NVIDIA® Jetson Xavier™ NX (8GB) GMSL2 Camera Sensor Hub
NRU-51V-16GB	Rugged NVIDIA® Jetson Xavier™ NX (16GB) GMSL2 Camera Sensor Hub

## Optional Accessories

<b>AC-IMX390-H60</b>	Sony IMX390 CMOS sensor camera; 1920x1080 @ 30fps; LFM; HFOV 63.9°; IP67+IP69K; -40°C to 85°C operating temperature; male FAKRA connector; active alignment; without lens cap	<b>AC-AR0233-H120-60FPS</b>	Onsemi AR0233 CMOS sensor camera; 1920x1080 @ 60fps; LFM; HFOV 118°; IP67; -40°C to 70°C operating temperature; male FAKRA connector
<b>AC-IMX390-H120</b>	Sony IMX390 CMOS sensor camera; 1920x1080 @ 30fps; LFM; HFOV 120.6°; IP67+IP69K; -40°C to 85°C operating temperature; male FAKRA connector; active alignment; without lens cap	<b>AC-AR0233-H190-60FPS</b>	Onsemi AR0233 CMOS sensor camera; 1920x1080 @ 60fps; LFM; HFOV 196°; IP67; -40°C to 70°C operating temperature; male FAKRA connector; without lens cap
<b>AC-IMX390-H190</b>	Sony IMX390 CMOS sensor camera; 1920x1080 @ 30fps; LFM; HFOV 186°; IP67+IP69K; -40°C to 85°C operating temperature; male FAKRA connector; active alignment; without lens cap	<b>PA-60W-OW</b>	60W AC/ DC power adapter 12V/ 5A; cord end terminals for terminal block, operating temperature: -30 to 60°C
<b>AC-AR0233-H60</b>	Onsemi AR0233 CMOS sensor camera; 1920x1080 @ 30fps; LFM; HFOV 60°; IP67; -40°C to 85°C operating temperature; male FAKRA connector	<b>PA-120W-OW</b>	120W AC/ DC power adapter 20V/ 6A; 18AWG/ 120cm; cord end terminals for terminal block, operating temperature: -30 to 70°C
<b>AC-AR0233-H120</b>	Onsemi AR0233 CMOS sensor camera; 1920x1080 @ 30fps; LFM; HFOV 118°; IP67; -40°C to 85°C operating temperature; male FAKRA connector	<b>Risr-M2M-mPCIe</b>	NGFF M.2 2242 key M to mini-PCIe adapter
<b>AC-AR0233-H190</b>	Onsemi AR0233 CMOS sensor camera; 1920x1080 @ 30fps; LFM; HFOV 196°; IP67; -40°C to 85°C operating temperature; male FAKRA connector; without lens cap	<b>Wmkit-NRU-50</b>	Wall mount kit for NRU-50 series, including wall mount brackets and screws
<b>AC-AR0233-H60-60FPS</b>	Onsemi AR0233 CMOS sensor camera; 1920x1080 @ 60fps; LFM; HFOV 60°; IP67; -40°C to 70°C operating temperature; male FAKRA connector	<b>Tpkit-NRU-50</b>	3 pcs of 30x30x2 mm thermal pad for mPCIe modules with the max component height between 1.3 mm and 2.4 mm, and M.2 B key modules with the max component height between 0.7 mm and 2.0 mm
		<b>FK-FF-CABLE-7M</b>	7M FAKRA cable for cameras with male FAKRA connector; the waterproof end is black
		<b>FK-FF-CABLE-15M</b>	15M FAKRA cable for cameras with male FAKRA connector; the waterproof end has heat shrink tube

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660