

ARES-1230-POS

Fanless Embedded Controller with Intel® Bay Trail SoC Processor



Features

- Intel® Celeron N2930 Quad Core™ 2.16 GHz SoC
- DDR3L 1600MHz SO-DIMM memory support up to 8GB
- Low Profile Enclosure (Aluminum alloy)
- 6 x COM ports (two w/ 5V or 12V, selectable)
- Support 1 x Full-size and 1 x half-size MiniPCle
- Video display: HDMI + DVI-I
- 1 x Antenna hole for optional WiFi function
- Wall Mounting kit

Embedded Computing

System

CPU	Intel® Quad-Core Processor N2930
Memory	1 x SO-DIMM 204Pin modules supports up to 8GB DDR3L -1600MHz
Chipset	Intel® SoC
Graphics	Intel® HD Graphics
LAN Chipset	2 x Intel® i210AT PCIe controller
Watchdog Timer	1~255 levels reset

I/O

Serial Port	COM 1~2: RS-232/422/485 (DB9, selectable, w/ 5V/12V) COM 3~6: RS-232/485 (DB9, selectable)
USB Port	1 x Type A USB2.0 ports 1 x Type A USB3.0/2.0 ports
LAN Port	2 x RJ-45 ports for GbE
Video Port	1 x DVI-I connector 1 x HDMI connector
Audio	Mic-in/Line-out
WiFi	1 x SMA antenna hole for optional WiFi function
Expansion Bus	1 x mSATA 1 x Full-Size mPCIE (PClex1+USB2.0) 1 x Half-Size mPCIE (PClex1 Lane only) 1 x SIM card socket

Environmental

Operating Temp.	-20 ~ 70°C (-4 ~ 158°F), ambient with air flow
Storage Temp.	-40 ~ 85°C (-40 ~ 185°F)
Operating Humidity	10 ~ 95% @ 70°C (non-condensing)
Vibration	5~500Hz 3G rms X,Y,Z axis w/SSD, according to IEC 68-2-64 40G peak acceleration (11 m sec. duration), operation
Shock & Crash	60G peak acceleration (11 m sec. duration), non operation According to IEC 68-2-27

Qualification

Certification	CE, FCC Class A
---------------	-----------------

Power Requirement

Power Input	DC 12V Input w/ DC-Jack
-------------	-------------------------

Power Consumption	20W
-------------------	-----

Storage

Type	1 x mSATA for SATA interface SSD Supports 600MB/s HDD transfer rate
------	--

Mechanical

Construction	Aluminum alloy
Mounting	Wall-Mount
Weight	933g (2.06lb)
Dimensions (W x D x H)	180 x 130 x 40 mm (7.09" x 5.12" x 1.57")


OS Support

Windows 7 / Windows 8.1 / Windows 10


Ordering Information

ARES-1230-POS	Intel® Bay Trail Atom™ N2930 bare-bone, 12V Input / 6 x COM ports
---------------	---

All specifications are subject to change without notice.





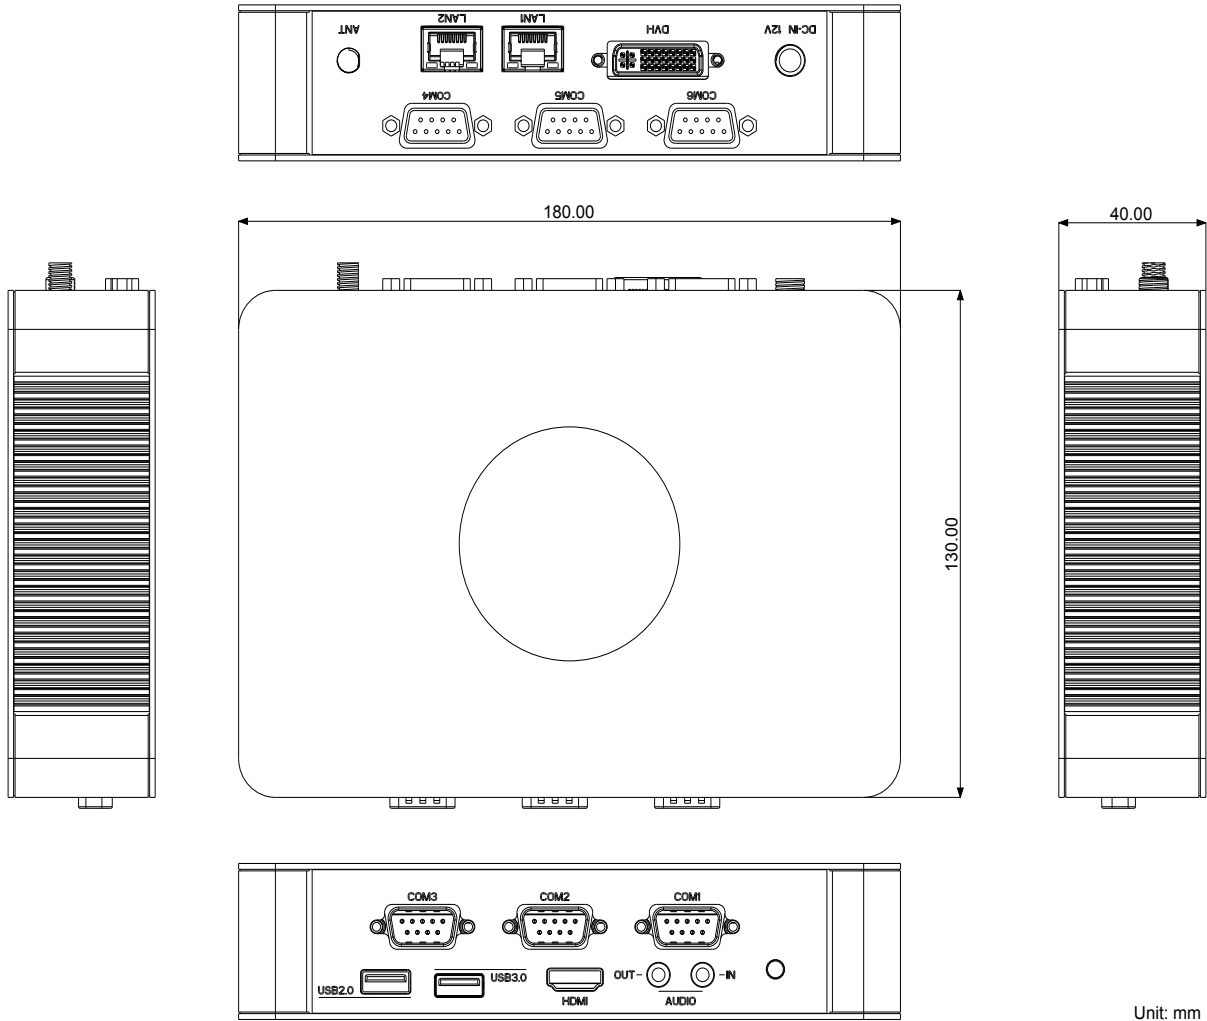




Dimensions



Unit: mm

Optional Configuration (CTOS* Kit)

PAC-P060W-04	12V/5A 60W AC/DC Adapter Kit	
WiFi-AT2130	Atheros AR9462 WiFi module w/ 10cm & 20cm internal wiring	
ANT-D11	1 x Wi-Fi Dual-band 2.4G/5G antenna	
MM-31L-2G	Industrial DDR3L-1333/1600 2GB SO-DIMM SDRAM	
MM-31L-4G	Industrial DDR3L-1333/1600 4GB SO-DIMM SDRAM	
32GB SSD	mSATA MLC 32GB	
64GB SSD	mSATA MLC 64GB	

*CTOS means Configure-to-Order Service.

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660