

# LMX-1202M-SFP Series

12-Port Industrial Gigabit Managed Ethernet Switch  
w/8\*10/100Tx, 2\*10/100/1000Tx RJ45, and 2\*100/1000 SFP Slots



## Features


- ▶ Supports 8\*10/100Tx Fast Ethernet Ports, 2\*Gigabit 10/100/1000Tx RJ45 and 2\*100/1000 SFP Slots for Fiber Connection
- ▶ Network Redundancy: STP/RSTP/MSTP, and G.8032 ERPS (Recovery Time <50ms)
- ▶ Supports IPv4/IPv6, and DHCP Option 66/67/82
- ▶ Supports Modbus/TCP Protocol for Device Management and Monitoring
- ▶ Configuration: Web Console, Telnet, CLI Command
- ▶ IGMP v1/v2/v3 for Multicast Traffic Filtering
- ▶ QoS (IEEE802.1p/1Q), CoS/ToS to Increase Determinism
- ▶ IEEE802.1Q VLAN for Easy Network Planning
- ▶ Enhanced Network Security with IEEE802.1X, SNMP v1/v2c/v3, HTTPS, and SSH/SSL
- ▶ Auto Warning by Exception through E-mail, Relay Output
- ▶ Support RMON Function for Efficient Network Monitoring
- ▶ Support Port Mirroring for Online Diagnostic
- ▶ 5-Year Warranty

## INTRODUCTION

Antaira's LMX-1202M-SFP series is a 12-port industrial gigabit managed Ethernet switch that is embedded with 8\*10/100Tx Fast Ethernet ports, 2\*10/100/1000Tx RJ45, and 2\*100/1000 dual rate SFP slots. This model is a fully manageable industrial Ethernet switch pre-loaded with standard Layer 2 network management software. The RJ45 ports provide flexibility to users for either 10/100 or 1000Tx Ethernet connections. The plug-in SFP modules provide 100MB or Gigabit Fiber connection where distance, EMI, or security is a concern.

The LMX-1202M-SFP series is compact, IP30 rated, and DIN-rail or wall mountable. There are also two wide operating temperature models for either a standard temperature range (STD: -10°C to 70°C) or an extended temperature range (EOT: -40°C to 75°C). It also provides high EFT and ESD protection for industrial networking applications; such as, power/utility, water wastewater, oil/gas/mining, factory automation, security surveillance, ITS, and any other outdoor or harsh environment.

## DIMENSIONS

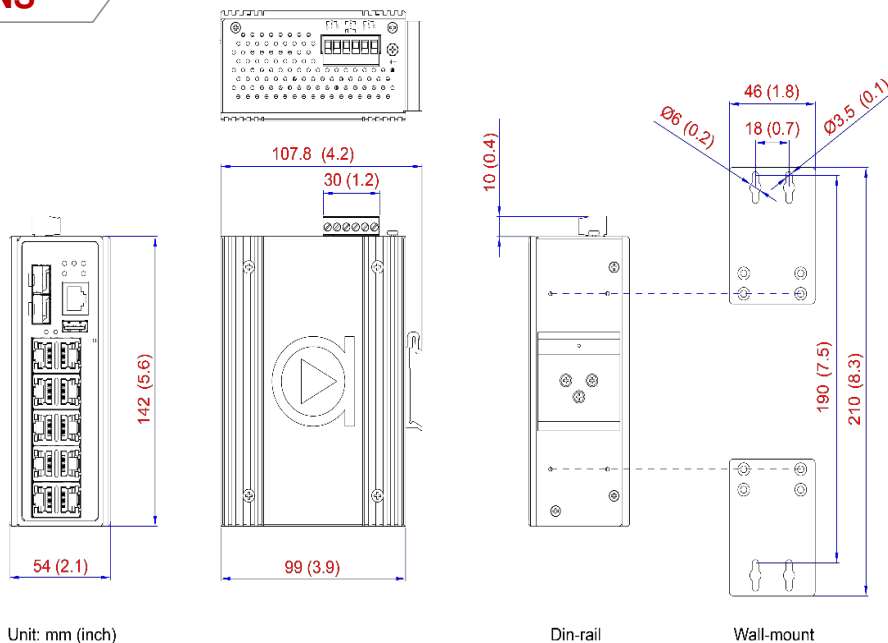

## SPECIFICATIONS

<b>Technology</b>	IEEE 802.3 10Tx Ethernet IEEE 802.3u 100Tx Fast Ethernet IEEE 802.3ab 1000Tx Gigabit Ethernet IEEE 802.3z Gigabit Fiber IEEE 802.3x Flow Control for Full Duplex IEEE 802.3ad for Port Trunk with LACP IEEE 802.1d STP (Spanning Tree Protocol)
<b>Standards</b>	IEEE 802.1w RSTP (Rapid Spanning Tree Protocol) IEEE 802.1s MSTP (Multiple Spanning Tree Protocol) ITU-T G.8032/Y.1344 ERPS (Ethernet Ring Protection Switch) Protocol IEEE 802.1Q for VLAN Tagging IEEE 802.1x for Network Authentication IEEE 802.1p QoS/CoS Protocol for Traffic Prioritization
<b>Protocol</b>	IGMPv1/v2/v3, SNMPv1/v2c/v3, TFTP, SNMP, SMTP, RMON, HTTP, HTTPS, Telnet, Syslog, DHCP Option 66/67/82, SSH/SSL, Modbus/TCP, LLDP, IPv4/IPv6, NAT, DHCP per port, SMTP, Quick ERPS, TLS
<b>Switch Properties</b>	
<b>Switch Architecture</b>	Back-Plane (Switching Fabric): 9.6Gbps
<b>Configuration</b>	Web Console, Telnet, CLI
<b>Processing Type</b>	Store and Forward
<b>Flow Control</b>	IEEE 802.3x for full duplex mode, back pressure for half duplex mode
<b>Transfer Rate</b>	14,880pps for 10Base-T Ethernet 148,800pps for 100Base-T Fast Ethernet 1,488,000pps for Gigabit Ethernet
<b>Packet Buffer</b>	4 Mbits
<b>MAC Table Size</b>	8K
<b>VLAN Group</b>	1 ~ 4094
<b>IGMP Group</b>	1024 Groups
<b>Port Interface</b>	
<b>Ethernet RJ45 Port</b>	8*10/100BaseTx auto negotiation, Full/Half duplex, and auto MDI/MDI-X connection
<b>Gigabit Ports</b>	2*RJ45 w/10/100/1000Tx and 2*100/1000 SFP Slots For Fiber
<b>Wavelength</b>	Refer to SFP Modules
<b>RS232 Serial Console</b>	1*RS232 in RJ45 connector with console cable, 115.2Kbps, 8,N,1
<b>Configuration Backup</b>	1*USB 2.0

<b>Protection</b>	
<b>Overload Current</b>	Present
<b>Power Reverse Polarity</b>	Present
<b>CPU Watchdog</b>	Present
<b>Network Cable</b>	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable; 100Base-TX: 2-pair UTP/STP Cat. 5 cable. EIA/TIA-568 100-ohm (100m) 1000BaseTX: UTP/STP Cat.5/5E cable; EIA/TIA-568 100-ohm (100m)
<b>Mechanical Characteristics</b>	
<b>LED Indicator</b>	Per Unit: Power 1 & 2 (Green), Fault (Red)
<b>Housing</b>	Metal IP30 rated
<b>Dimension</b>	54 x 142 x 99 mm
<b>Weight</b>	Unit: 2.2 lbs.; Shipping: 3.3 lbs.
<b>Mounting</b>	DIN-Rail; Wall-Mount (optional)
<b>Power Requirement</b>	
<b>Input Voltage</b>	12~48VDC Redundant Input
<b>Power Connection</b>	1 removable 6-contact terminal block
<b>Power Consumption</b>	15 Watts
<b>Environmental Limits</b>	
<b>Operating Temperature</b>	STD: -10 to 70°C EOT: -40 to 75°C
<b>Storage Temperature</b>	-40°C ~ 85°C
<b>Ambient Relative Humidity</b>	5 to 95%, (non-condensing)
<b>Regulatory Approvals</b>	
<b>EMI</b>	FCC Class A
<b>EMS</b>	IEC61000-4-2,3,4,5,6,8 IEC61000-6-2,4
<b>Free Fall</b>	IEC60068-2-32
<b>Shock</b>	IEC60068-2-27
<b>Vibration</b>	IEC60068-2-6
<b>Green</b>	RoHS Compliant
<b>Certifications</b>	FCC, CE, UL61010-1, 61010-2-201, NEMA TS2
<b>Warranty</b>	5 Years

## ORDERING INFO

<b>LMX-1202M-SFP</b>	12-Port Industrial Gigabit Managed Ethernet Switch with 8*10/100Tx, 2*10/100/1000Tx RJ45 Ports, and 2*100/1000 SFP Slots
<b>LMX-1202M-SFP-T</b>	12-Port Industrial Gigabit Managed Ethernet Switch with 8*10/100Tx, 2*10/100/1000Tx RJ45 Ports, and 2*100/1000 SFP Slots; EOT: -40°C to 75°C
<b>Optional Accessories</b>	
<b>SFP-M-T</b>	1 Gigabit Fiber SFP Transceiver, Multi-Mode 550M / LC / 850nm, -40°C~85°C
<b>SFP-S10-T</b>	1 Gigabit Fiber SFP Transceiver, Single Mode 10KM / LC / 1310nm, -40°C~85°C
<b>DIN-RACK-2U</b>	Din-Rail to 19" Rack Mount Adapter for all Din-Rail Mountable Products, 2U Height

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660