

ARS-7235-PD-AC Series

Industrial Dual Radio IEEE 802.11a/b/g/n/ac Wireless Access Point/Client/Bridge/Repeater/Router with 1*PoE PD



Features


- ▶ Industrial 2x2 MIMO
- ▶ Qualcomm IPQ4029 SoC
- ▶ Supports IEEE 802.11a/b/g/n/ac
- ▶ Supports 2*10/100/1000 Base-TX WAN/LAN Ports with 1*PoE PD
- ▶ Tx Power 25dB for 2.4GHz
- ▶ Tx Power 24dB for 5GHz
- ▶ WPA, WPA2, WPA3, WEP, TKIP, AES
- ▶ Power Input: 9~48VDC in 6-Pin Terminal Block
- ▶ Reverse Polarity Protection
- ▶ IP30 Protection
- ▶ DIN-Rail and Wall Mountable
- ▶ Operating Temperature Range: STD: -10°C to 60°C; EOT: -35°C to 70°C
- ▶ 5-Year Warranty

INTRODUCTION

Antaira Technologies' ARS-7235-PD-AC Series is an industrial dual radio IEEE 802.11a/b/g/n/ac wireless LAN access point with added router capabilities and PD (Powered-Device) function. Embedded with the Qualcomm IPQ4029 SoC chipset, it boasts network robustness, stability, and a wide network coverage with a very low voltage input of 9V. Based on IEEE 802.11 a/b/g/n/ac, the access point supports high-speed data transmission of up to 867Mbps.

The ARS-7235-PD-AC Series is capable of operating in different modes, which makes it suitable for a wide variety of wireless applications including long-distance deployments. The unit also allows the user to position the wireless antennas in a better signal-broadcasting location for improved wireless coverage and signal strength or simply in a more convenient location.

DIMENSIONS

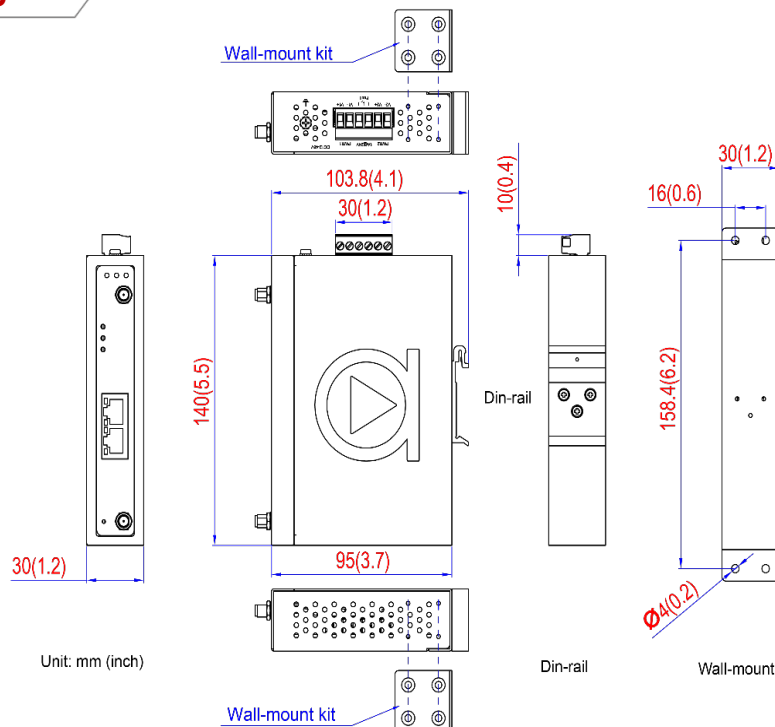

SPECIFICATIONS

Technology		Power Requirement	
Standards	IEEE 802.11a/b/g/n/ac Wireless LAN	Input Voltage	9~48VDC Redundant Input
	IEEE 802.3 10Base-T Ethernet	Power Connection	1 removable 6-contact terminal block
	IEEE 802.3u 100Base-TX Fast Ethernet	Reverse Polarity Protection	Present
	IEEE 802.3ab 1000Base-T Gigabit Ethernet	Overload Current Protection	Present
Protocol	IEEE 802.3af/at Power over Ethernet	System Power Consumption	3.5 Watts
	IP, TCP, UDP, ARP, BOOTP, ICMP, HTTP, HTTPS, DNS Proxy, NTP, Dynamic DNS, SMTP, SNMP	Environmental Limits	
WLAN Operation Mode	AP/Client/Bridge/Repeater/Router	Operating Temperature	STD: -10°C to 60°C EOT: -35°C to 70°C
Encryption Security	WPA, WPA2, WPA3, WEP, TKIP, AES, RADIUS, 802.1x/EAP	Storage Temperature	-40°C to 80°C
Interface		Ambient Relative Humidity	5 to 90%, (non-condensing)
Ethernet Port	2*10/100/1000Tx with 1*PoE PD	Regulatory Approvals	
WLAN	Dual Band 2.4GHz/5GHz concurrent	EMI	FCC Part 15 Subpart B CE EN55032
Antenna	2*External SMA Antennas:	EMS	CE EN55024 IEC61000-4-2,3,4,5,6,8,11
	3dBi for 2.4GHz, 5dBi for 5GHz (MIMO support, Dual 2Tx/2Rx)	Free Fall	IEC60068-2-32
LED Indicators	Power, Fault, Wi-Fi Signal, Link, Activity	Shock	IEC60068-2-27
Frequency Range		Vibration	IEC60068-2-6
IEEE 802.11a/b/g/n/ac (2.4GHz)	2.402G-2.482GHz, 25dBm	Green	RoHS Compliant
IEEE 802.11a/b/g/n/ac (5GHz)	4.92G-5.92GHz, 24dBm	Certifications	FCC, CE
Mechanical Characteristics		Warranty	5 Years
Housing	Metal, IP30 rated		
Dimensions	30 x 140 x 95 mm (W x H x D)		
Weight	Unit: 0.60 lb. Shipping: 1.0 lb.		
Mounting	DIN-Rail mounting, Wall mounting		

ORDERING INFO

ARS-7235-PD-AC	Industrial Dual Radio IEEE 802.11a/b/g/n/ac Wireless Access Point/Client/Bridge/Repeater/Router with 1*PoE PD
ARS-7235-PD-AC-T	Industrial Dual Radio IEEE 802.11a/b/g/n/ac Wireless Access Point/Client/Bridge/Repeater/Router with 1*PoE PD; EOT: -35°C to 70°C

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660