



Samsung SMART Signage

QMN Series

Share Clear Messaging that Resonates through Intelligent Picture Quality

Samsung's QMN Series displays deliver content with added precision and visual impact while also improving operational efficiency. Through advanced UHD picture quality, the QMN Series displays foster an inviting and memorable viewing environment in any indoor setting. Additionally, Backed by the powerful TIZEN operating system, the QMN Series displays feature a host of business-ready functionalities while also protecting business and customer data through enhanced security measures.

Highlights

- Revitalize customer engagement in retail and transportation settings
- Elevate content quality through a unique combination of picture-enhancing features
- Facilitate secure, PC-free meetings through rigid three-layer protection
- Manage performance and identify potential disruptions with detailed remote monitoring
- Maintain content integrity through dust- and glare-resistant exterior glass


SAMSUNG

Industry Trend


As businesses seek to extend viewer engagement and reinforce their own branding, many see advanced digital signage as a versatile and effective solution. Businesses want to showcase content as crisply and clearly as possible, with new innovations such as UHD picture quality offering customers something new and exciting. Beyond graphic precision and accuracy, businesses also seek new technologies that make their lives easier. This flexibility ranges from features that expand operational capabilities and reduce maintenance to the maximization of data security and protection.

Why Samsung QMN Series?

Whether for a retailer promoting new sales or a transportation hub keeping travelers on schedule, clear information delivery drives success. Samsung's QMN Series help businesses achieve these goals by leveraging Samsung's Intelligent Picture Quality technology to elevate content delivery in any setting. This refined presentation transforms content from any source to UHD-level quality, and optimizes on-screen text and imagery with crisp edges and fine detail. Recent advancements have made our signage offerings even stronger and empower businesses to develop and deploy content with the confidence that it will perform continuously.



Intelligent Picture Quality



Intelligent UHD




Intelligent HDR+




Intelligent Picture Mode

Key Features






Powerful Performance
- Graphic performance with Quad core CPU
- UHD Content play back
- HTML5 Compatibility



Easy Development
- Tizen Studio
- Node.JS HTTP web Server




Business Expandability
- Remote Management
- Signage Device Management
- Enhanced Security


Streamline Operational Efficiency


The embedded MagicINFO Player S6, backed by the powerful TIZEN operating system, boosts the displays overall performance, allows for painless content management and ensures seamless content transition and playback.

Meeting Room




Office Desk






PC-less Solution




Secured by Knox


Empower Secure and Remote Collaboration

Samsung's KNOX platform provides rigid three-layer protection while also securing and controlling USB and user network exchange through dedicated signage device management. With added security, businesses can facilitate remote, PC-free meetings without risk or complexity.






Monitoring




Remote Control




Firmware Update


Maintain Continuous Display Performance

Beyond security and content management, QMN Series users can trust the displays' remote management for fast, efficient issue mitigation. Users can monitor and diagnose irregularities – both on their own and with help from Samsung's 24/7 Network Operations Center – from any location.

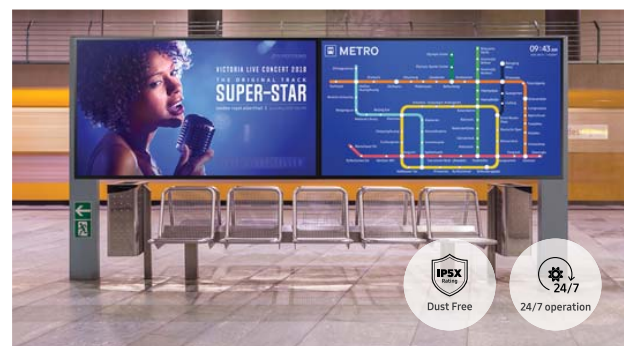



IP5X
Dust Free



24/7
operation


Shield Content from Outside Interference

The QMN Series' durable, IP5x-validated design ensures continuous, glare-free content delivery regardless of environmental conditions. As a result, transportation hubs and other arenas susceptible to dust, dirt and lighting exposure can activate and run the displays without an external enclosure.



Enjoy Convenient Display Management

The QMN Series' integrated centralized infrared receiver (IR) ensures easier and more flexible user control. Each display receives signals on individual panels via Central IR, and users can navigate the IR functionality from various locations to further augment uninterrupted performance.



Accelerate Multi-Screen Content Delivery

For added flexibility, the QMN Series offers users HDMI 2.0 and DP1.2 port connectivity. This versatility ensures a consistent 60 Hz. refresh rate and optimal clarity regardless of the source. Additionally, users can configure UHD daisy chains up to 2x2 in size through the HDMI 2.0 port.

Specification

MODEL			QM43N	QM49N	QM55N	QM65N	QM75N	
Panel	Diagonal Size	Class Measured	43	49	55	65	75	
	Type		New Edge	New Edge	New Edge	New Edge	New Edge	
	Resolution		UHD (3840 x 2160)	UHD (3840 x 2160)	UHD (3840 x 2160)	UHD (3840 x 2160)	UHD (3840 x 2160)	
	Pixel Pitch (mm)		0.2451 x 0.2451	0.093 x 0.279	0.105 x 0.315	0.372 x 0.372	0.42975 x 0.42975	
	Active Display Area		941.184 (H) x 529.416 (V)	1073.78 (H) x 604.00 (V)	1209.6 (H) x 680.4 (V)	1428.48 (H) x 803.52 (V)	1650.24 (H) x 928.26 (V)	
	Brightness (Typ.)		500	500	500	500	500	
	Contrast Ratio (Typ.)		4000 : 1	4000 : 1	4000 : 1	5000 : 1	6000 : 1	
	Viewing Angle (H/V)		178 / 178	178 / 178	178 / 178	178 / 178	178 / 178	
	Response Time (G to G)		8ms	8ms	8ms	8ms	8ms	
	Display Colors		16.7M	16.7M	16.7M	16.7M	16.7M	
	Color Gamut		72%	72%	72%	72%	72%	
	Operation Hour		24 / 7	24 / 7	24 / 7	24 / 7	24 / 7	
	Haze		44%	25%	25%	44%	44%	
	Display	Dynamic C/R		MEGA	MEGA	MEGA	MEGA	MEGA
H-Scanning Frequency			30 ~ 81kHz	30 ~ 81kHz	30 ~ 81kHz	30 ~ 81kHz	30 ~ 81kHz	
V-Scanning Frequency			48 ~ 75Hz	48 ~ 75Hz	48 ~ 75Hz	48 ~ 75Hz	48 ~ 75Hz	
Maximum Pixel Frequency			594MHz	594MHz	594MHz	594MHz	v 594MHz	
Connectivity	INPUT	RGB	DVI-D, Display Port 1.2 (1)	DVI-D, Display Port 1.2 (1)	DVI-D, Display Port 1.2 (1)	DVI-D, Display Port 1.2 (1)	DVI-D, Display Port 1.2 (1)	
		VIDEO	HDMI 2.0 (2)	HDMI 2.0 (2)	HDMI 2.0 (2)	HDMI 2.0 (2)	HDMI 2.0 (2)	
		HDCP	HDCP2.2	HDCP2.2	HDCP2.2	HDCP2.2	HDCP2.2	
	AUDIO							
		USB	USB 2.0 x 2	USB 2.0 x 2	USB 2.0 x 2	USB 2.0 x 2	USB 2.0 x 2	
		HDMI 2.0 (Loop-out)	HDMI 2.0 (Loop-out)	HDMI 2.0 (Loop-out)	HDMI 2.0 (Loop-out)	HDMI 2.0 (Loop-out)	HDMI 2.0 (Loop-out)	
	OUTPUT	VIDEO	N/A	N/A	N/A	N/A	N/A	
		AUDIO	Stereo mini Jack	Stereo mini Jack	Stereo mini Jack	Stereo mini Jack	Stereo mini Jack	
		Power Out	N/A	N/A	N/A	N/A	N/A	
		USB	N/A	N/A	N/A	N/A	N/A	
	EXTERNAL CONTROL			RS232C (in/out) thru stereo jack, RJ45				
	EXTERNAL SENSOR		IR	IR	IR	IR	IR	
	Tuner		N/A	N/A	N/A	N/A	N/A	
	Power	Type		Internal	Internal	Internal	Internal	Internal
Power Supply					AC 100-240 V-(+/-10%), 50/60 Hz			
Power Consumption		Max [W/h]		121	132	143	176	220
		Typical [W/h]		76	91	96	125	159
		Rating [W/h]		110	120	130	160	200
		Sleep mode		0.5	0.5	0.5	0.5	0.5
		Off mode		N/A	N/A	N/A	N/A	N/A
Mechanical Spec	Dimension (mm)	Set	970.2 x 563.2 x 58.5	1102.8 x 637.8 x 59.4	1238.6 x 714.2 x 59.0	1457.5 x 837.3 x 59.4	1684.6 x 966.7 x 60.4	
		Package	943.2 x 531.4 x 1081.5	1075.8 x 606.0 x 1233.7	1211.6 x 682.4 x 1389.4	1430.5 x 805.5 x 1640.6	1652.2 x 930.3 x 1895.0	
	Weight (kg)	Set	10	13.5	17.8	25.2	37.8	
		Package	13.3	17.7	22.4	33.1	50.6	
	VESA Mount		200 x 200	200 x 200	200 x 200	400 X 400	400 X 400	
	Protection Glass		N/A	N/A	N/A	N/A	N/A	
	Stand Type		Foot Stand (Optional)	Foot Stand (Optional)	Foot Stand (Optional)	No	No	
	Bezel Width (Top/Side/Bot) (mm)		13.5 (Top,Side), 17.7 (Bottom)	13.5 (Top,Side), 17.7 (Bottom)	13.5 (Top,Side), 17.7 (Bottom)	13.5 (Top,Side), 17.7 (Bottom)	16.2(top,side), 19.3(bottom)	
Operation	Operating Temperature		0°C ~ 40°C	0°C ~ 40°C	0°C ~ 40°C	0°C ~ 40°C	0°C ~ 40°C	
	Humidity		10 ~ 80%	10 ~ 80%	10 ~ 80%	10 ~ 80%	10 ~ 80%	
Feature	Key		UHD Signage Display Slim & Light Signage with Built-in MagicInfo S6, S5SP 6.0					
	Special	H/W	Temperature Sensor,Pivot Display, Clock Battery (168hrs Clock Keeping), Built in Speaker (10W 2ch), Video Wall Daisy Chain (HDCP2.2:4EA,HDCP1.4:7EA), IP5x, Wi-Fi/BT					
		S/W	Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting)					
	Internal Player (Embedded H/W)	Processor	Coretex A72 1.7GHz Quad-Core CPU					
		On-Chip Cache Memory	L1 Instruction Cache : 48KB / L1 Data Cache : 32KB / L2 Cache : 2MB					
		Clock Speed	1.7GHz					
		Main Memory Interface	2.5GB / LPDDR4 1.5GHz 64bit					
		Graphics	Graphic resolution : 1920x1080, Output resolution : 3840x2160 (Scale up from graphic processing result.)					
		Storage (FDM)	8GB (3.88GB Occupied by O/S, 4.12GB Available)					
		Multimedia	*Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, AVS+, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder : AC3 (DD), MPEG					
IO Ports		USB 2.0						
	Operating System	Tizen 4.0 (VDLinux)						
Certification	Safety	60950-1						
	EMC	Class A						
	Environment	ENERGY STAR 7.0 (USA)						
Accessories	Included	Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries						
	Optional	Stand	New Stand Accessory					
		Mount	WMN4070SE					
		Specialty	CML400XK					
Media Player		N/A						

About Samsung Electronics Co., Ltd.

Samsung inspires the world and shapes the future with transformative ideas and technologies. The company is redefining the worlds of TVs, smartphones, wearable devices, tablets, digital appliances, network systems, and memory, system LSI, foundry and LED solutions. For the latest news, please visit the Samsung Newsroom at <http://news.samsung.com>.

SMART Signage

For more information about Samsung SMART Signage QMN Series Displays, visit www.samsung.com/business or www.samsung.com/displaysolutions

Copyright © 2018 Samsung Electronics Co. Ltd. All rights reserved. Samsung is a registered trademark of Samsung Electronics Co. Ltd. Specifications and designs are subject to change without notice. Non-metric weights and measurements are approximate. All data were deemed correct at time of creation. Samsung is not liable for errors or omissions. All brand, product, service names and logos are trademarks and/or registered trademarks of their respective owners and are hereby recognized and acknowledged.

Samsung Electronics Co., Ltd.
129 Samseong-ro, Maetan-dong, Yeongtong-gu, Suwon, Gyeonggi-do, Korea

2018-5

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660