




Rugged Embedded

# Nuvo-11000 Series

Intel® Core™ Ultra 200 Series Fanless Embedded Computer with 2.5GbE/ GbE, USB 3.2, 8-CH DIO, optional 10GbE and Expansion Cassette & MeziO® Interface

Preliminary

## Key Features



- Supports Intel® Core™ Ultra 200 Series 24C/ 24T 35W/ 65W LGA1851 CPU
- Rugged, -25°C to 70°C fanless operation
- Up to 5x 2.5GbE and 1x GiGE ports with optional PoE+, supporting 9.5 KB jumbo frame
- Up to 8x USB 3.2 Gen2 ports
- 4-CH isolated DI and 4-CH isolated DO
- 1x optional 10GBASE-T Ethernet
- Expansion Cassette for PCIe add-on card accommodation
- MeziO® interface for easy function expansion



[CONTACT US](#)

[GET QUOTE](#)

## Introduction

Nuvo-11000 series is Neosys' flagship rugged embedded computer built on the Intel® Core™ Ultra 200 series platform. Powered by TSMC's advanced 3nm photolithography, the latest Core™ Ultra 200 processors offer up to 24 cores/ 24 threads with higher CPU clock rates, and an integrated neural processing unit (NPU) for AI acceleration. This results in a 1.2x boost in CPU performance and AI computing capabilities of up to 36 TOPs. Combined with DDR5-6400 memory and PCIe Gen5 support, it delivers a significant improvement in computing power, enhancing performance across diverse industrial applications.

Nuvo-11000 series provides comprehensive I/O capabilities for industrial applications. It includes five 2.5Gb and a 1Gb Ethernet ports with optional PoE+ capability, one optional 10GbE port for high-speed data transfer or 10Gb industrial camera, and eight USB 3.2 Gen2 ports for USB3 cameras. Additionally, an upgraded M.2 Gen5x4 slot supports the latest NVMe SSDs, achieving read/ write speeds over 11,000 MB/s and the system also features 4x isolated DI and 4x isolated DO for automation and machine vision applications.

For extended functionality, the series supports add-on cards via its expansion Cassette, proprietary MeziO® interface, and internal mini-PCIe slots, ensuring adaptability to diverse application requirements.

The advanced Intel® Core™ Ultra 200 processors also bring better energy efficiency to the Nuvo-11000 platform. Compared to the previous generation, they can deliver nearly 120% the performance while consuming only 80% of the power\*. Combining a proven thermal design with versatile I/O functions, Nuvo-11000 offers a rugged, high-performance embedded computing solution tailored for a wide range of industrial applications.

\* Benchmarked using PassMark PerformanceTest.

## Specifications

System Core		Internal Expansion Bus	
<b>Processor</b>	Supports Intel® Core™ Ultra 200 series CPU (LGA 1851 socket), 35W and 65W TDP - Intel® Core™ Ultra 9 285/285T - Intel® Core™ Ultra 7 265/265T - Intel® Core™ Ultra 5 245/245T/225/225T	<b>PCI Express</b>	1x PCIe x16 slot@Gen4, 16-lanes PCIe signals in Cassette (Nuvo-11002E/ 11006E) 2x PCIe x16 slots@Gen4, 8-lanes PCIe signals in Cassette (11006DE)
<b>Chipset</b>	Intel® H810/ Q870 Platform Controller Hub	<b>Mini PCI Express</b>	2x full-size mini PCI Express socket
<b>Graphics</b>	Integrated Intel X® LPG Graphics	<b>Expandable I/O</b>	1x MeziO® expansion port for Neosys MeziO® modules
<b>AI Engine</b>	Integrated neural processing unit	<b>Power Supply</b>	
<b>Memory</b>	Up to 96 GB non-ECC DDR5 6400 SDRAM (Dual SODIMM slots)	<b>DC Input</b>	1x 3-pin pluggable terminal block for 8V to 48VDC DC input (V+/ GND/ IGN)
<b>AMT</b>	Supports Intel vPro/ AMT 16.0	<b>Remote Ctrl. &amp; LED Output</b>	1x 10-pin (2x5) wafer connector for remote on/off control and status LED output
<b>TPM</b>	Supports dTPM 2.0	<b>Mechanical</b>	
<b>I/O Interface</b>		<b>Dimension</b>	240 mm (W) x 225 mm (D) x 90 mm (H) (Nuvo-11000E series) 240 mm (W) x 225 mm (D) x 110.5 mm (H) (Nuvo-11000DE series) 240 mm (W) x 225 mm (D) x 79 mm (H) (Nuvo-11000LP series)
<b>Ethernet</b>	1x 2.5G Ethernet by I226-IT and 1x Gigabit Ethernet by I219-LM (Nuvo-11002E/LP) with screw-lock 5x 2.5G Ethernet by I226-IT and 1x Gigabit Ethernet by I219-LM (Nuvo-11006E/DE/LP) with screw-lock 1x optional 10GBASE-T Ethernet (Nuvo-11006E/ DE/ LP)	<b>Weight</b>	3.58 kg (Nuvo-11000E Series)/ 3.89 kg (Nuvo-11000DE series) 3.36 kg (Nuvo-11000LP series)
<b>PoE+</b>	Optional IEEE 802.3at PoE+ PSE for Port 3 ~ Port 6 100 W total power budget	<b>Mounting</b>	Wall-mount (standard) or DIN-rail mount (optional)
<b>USB</b>	8x USB 3.2 Gen2 ports (Nuvo-11006LP/E/DE) 2x USB 3.2 Gen2, 2x USB3.2 Gen1 and 4x USB2.0 ports (Nuvo-11002LP/E)	<b>Environmental</b>	
<b>Isolated DIO</b>	4-CH isolated DI and 4-CH isolated DO	<b>Operating Temperature</b>	With 35W CPU -25°C to 70°C* With 65W CPU -25°C to 70°C* (configured as 35W TDP) -25°C to 50°C* (configured as 65W TDP)
<b>Video Port</b>	1x HDMI™, supporting 3840 x 2160 resolution 2x DisplayPort, supporting 4096 x 2304 resolution	<b>Storage Temperature</b>	-40°C to 85°C
<b>Serial Port</b>	2x software-programmable RS-232/ 422/ 485 ports (COM1/ 2) 2x 3-wire RS-232 ports (COM3/ 4)	<b>Humidity</b>	10% to 90% , non-condensing
<b>Audio</b>	1x 3.5 mm jack for mic-in and speaker-out	<b>Vibration</b>	MIL-STD-810H, Method 514.8, Category 4
<b>I/O Interface</b>		<b>Shock</b>	MIL-STD-810H, Method 516.8, Procedure I
<b>M.2 NVMe</b>	1x M.2 2280 M key NVMe socket (PCIe Gen5x4) for NVMe SSD (Nuvo-11006E/DE/LP)	<b>EMC</b>	CE/FCC Class A, according to EN 55032 & EN 55035
<b>SATA HDD</b>	2x internal SATA port for 2.5" HDD/ SSD installation, supporting RAID 0/ 1 (Nuvo-11000E/11000DE) 1x hot-swappable 2.5" HDD tray (7mm HDD/ SSD) and 1x internal 2.5" SATA port, supporting RAID 0/ 1 (Nuvo-11000LP)	* For sub-zero and over 60°C operating temperature, a wide temperature HDD/ SSD/ NVMe is required.	


All rights reserved. Copyright© 2025 Neosys Technology Inc.

Last updated: 18 - Feb 2025




Nuvo-11000 Series

**Appearance**

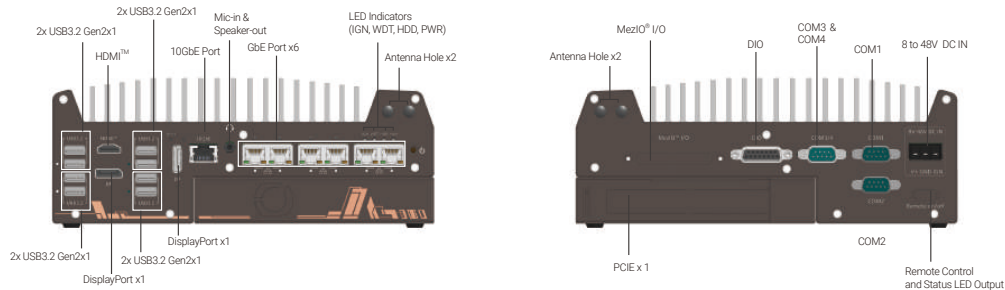

**Dimensions**

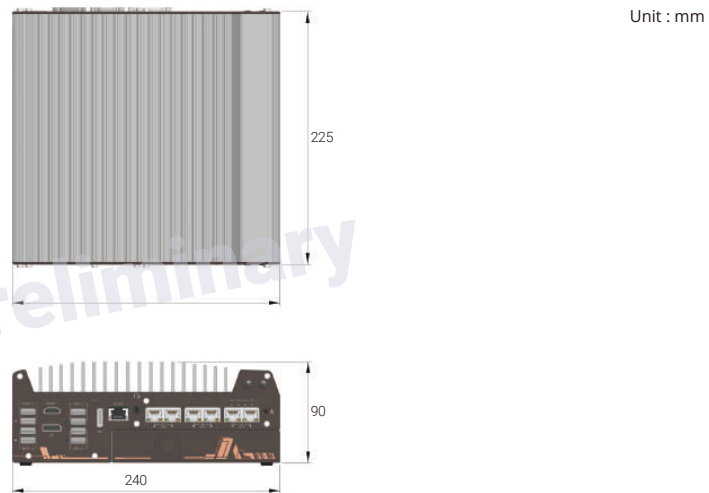

**Ordering Information**

Model No.	Product Description
<b>Nuvo-11002E</b>	Intel® Core™ Ultra 200 Series Rugged Embedded Computer with 2x 2.5GbE/GbE, USB 3.2, single-slot PCIe Cassette & MeziO® Interface
<b>Nuvo-11006E</b>	Intel® Core™ Ultra 200 Series Rugged Embedded Computer with 6x 2.5GbE/GbE, USB 3.2, single-slot PCIe Cassette & MeziO® Interface
<b>Nuvo-11006DE</b>	Intel® Core™ Ultra 200 Series Rugged Embedded Computer with 6x 2.5GbE/GbE, USB 3.2, dual-slot PCIe Cassette & MeziO® Interface
<b>Nuvo-11002LP</b>	Intel® Core™ Ultra 200 Series Rugged Embedded Computer with 2x 2.5GbE/GbE, USB 3.2, MeziO™ Interface & 2.5" HDD tray
<b>Nuvo-11006LP</b>	Intel® Core™ Ultra 200 Series Rugged Embedded Computer with 6x 2.5GbE/GbE, USB 3.2, MeziO™ Interface & 2.5" HDD tray
<b>PoE+ Option</b>	Option of 802.3at PoE+ PSE for 2.5GbE port 3 to port 6
<b>10G Ethernet Option</b>	Option of 10GBASE-T Ethernet port

**Optional Accessories**

<b>PA-280W-ET2</b>	280W AC/DC power adapter 24V/ 11.67A ; 16AWG/ 100cm; cord end terminals for terminal block, operating temperature : -30°C to 60°C. (recommended for 65W CPU or 35W CPU with PoE+ option)		
<b>PA-600W-ENC</b>	160W AC-DC power adapter 20V/8A; 18AWG/120cm; cord end terminals for terminal block, operating temperature: -30°C to 70°C. (recommended for 35W CPU)		
<b>Dmpbr-Nuvo5000_7000</b>	Neusys' patented damping brackets assembly for Nuvo-11000 series		
<b>DINRAIL-O</b>	DIN-rail mount assembly for Nuvo-11000 series		
<b>MeziO® Modules</b>			
<b>MeziO®-C180</b>	MeziO® module with 4x RS-232/ 422/ 485 ports and 4x RS-232 ports	<b>MeziO®-V20-EP</b>	MeziO® module with ignition power control function for in-vehicle application
<b>MeziO®-C181</b>	MeziO® module with 4x RS-232/ 422/ 485 ports and 4x RS-422/ 485 ports	<b>MeziO®-U4</b>	MeziO® module with 4x USB 3.1 ports
<b>MeziO®-D220</b>	MeziO® module with 8-CH isolated digital input and 8-CH isolated digital output	<b>MeziO®-G4</b>	MeziO® module with 4x GigE ports
<b>MeziO®-D230</b>	MeziO® module with 16-CH isolated digital input and 16-CH isolated digital output	<b>MeziO®-G4P</b>	MeziO® module with 4x IEEE 802.3at PoE+ ports <small>Only Nuvo-11006LP/E/DE-PoE support MeziO-G4P</small>
<b>MeziO®-D330</b>	MeziO® module with 16-CH isolated DI and 16-CH isolated DO MeziO® module		

All specifications and photos are subject to change without prior notice

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660